


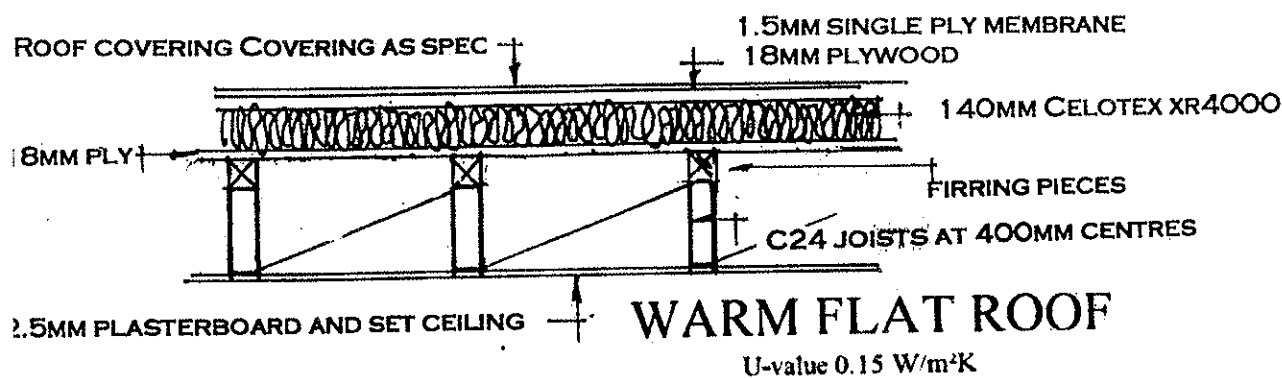

**SINGLE STOREY REAR ADDITION & ALTS
13, SELANGOR AVENUE, EMSWORTH, HANTS.
FOR MR J. PHILLIPS.**

CAVITY WALL


U-value 0.18 W/m²K

Walls to be built with 1:1:6 cement mortar

103mm facing brick

Stainless steel retaining wall ties built in at 750mm ctrs horizontally, 450mm vertically and 225mm ctrs at reveals and corners in staggered rows

Horizontal strip polyimide (hyload) damp proof course to both leafs minimum 150mm above external ground level

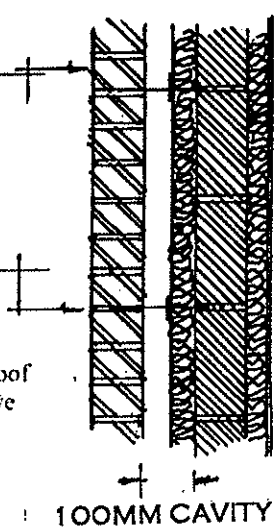

Cavity wall skins - 100mm lightweight Q, 15 W/mK

Cavity partially filled with 50mm Celotex GA4000 insulation plus 52.5mm PIR insulated plasterboard internally. e.g. Celotex PL4000. Insulated plasterboard to be dot and dabbed to internal wall or mechanically fixed using battens. VCL provided if required by BCO



Finish with plaster skim

NOT TO SCALE

SOLID GROUND FLOOR

U-value 0.18 W/m²K

P/A Ratio 0.5

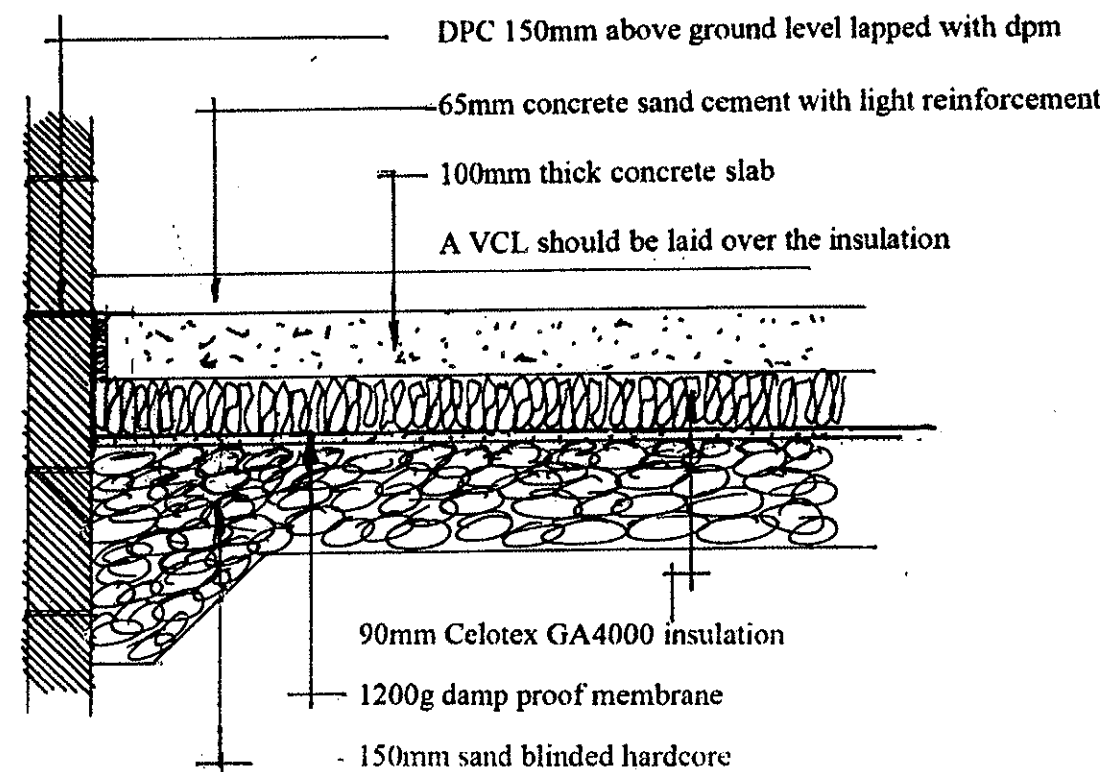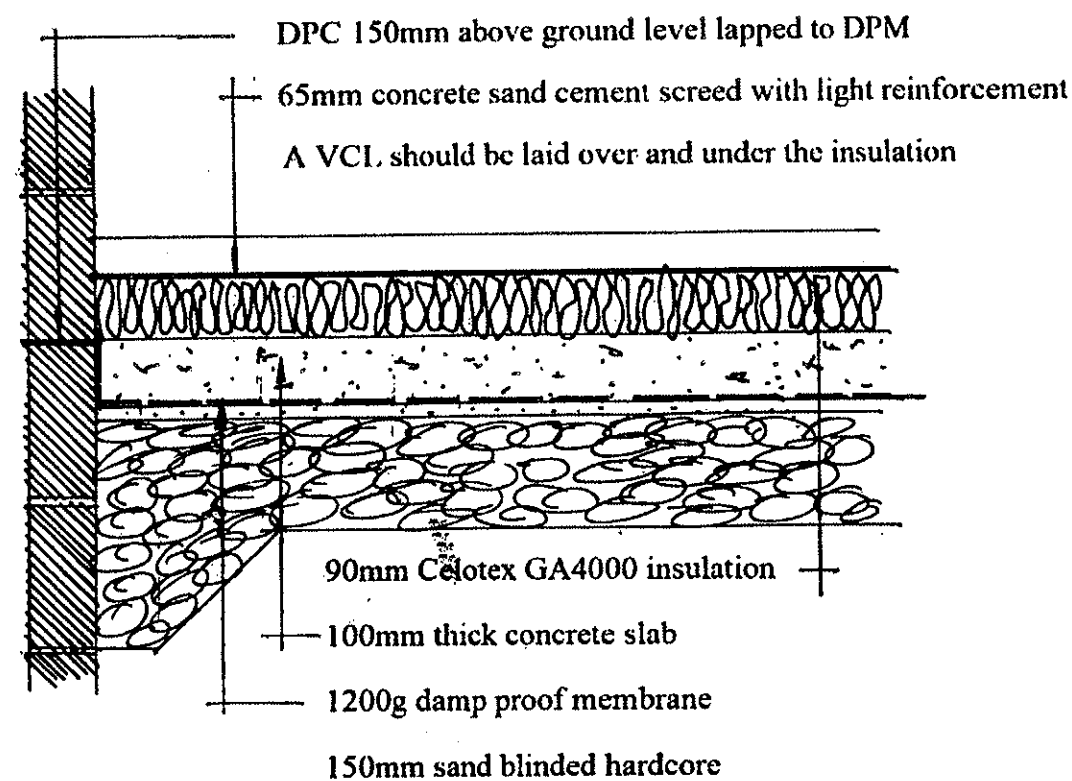

SOLID GROUND FLOOR

U-value 0.18 W/m²K

PETER J. WALKER
ISLAND DESIGN
182 SEAFRONT, HAYLING ISLAND, HANTS
PO11 9AN
TEL: 02392467571