





- NOTES**
1. All dimensions and levels are in metres unless otherwise noted
 2. This drawing is to be read in conjunction with the relevant Architect's/Engineer's drawings, specifications and CDM documentation
 3. This drawing has been produced electronically and may have been photo reduced or enlarged when copied. Work to figured dimensions only (DO NOT SCALE - EXCEPT FOR PLANNING PURPOSES). All dimensions to be checked on site. Any errors or omissions to be reported to the engineer immediately.
 4. This drawing contains coloured lines / information that may not be clear if reproduced in black and white.
 5. Digital copies of this plan can only be considered accurate if supplied directly by Infrastruct CS Ltd.

- VEHICLE MANOEUVRE NOTES**
1. This is not a construction drawing. For illustrative purposes only.
 2. The swept path analysis is based on the vehicles shown below.
 3. The swept path analysis shown on the drawing has been produced using Autotrack software. These are as accurate as possible using the correct speed and turning rate of real life vehicles, however the exact alignment can not be guaranteed due to the difference between the software operator and the vehicle driver.
 4. Please note that the manufacturers of Autotrack offer no warranty as to the results or the performance of the software.
 5. Vehicle manoeuvres tracked using a maximum forward design speed of 7mph.

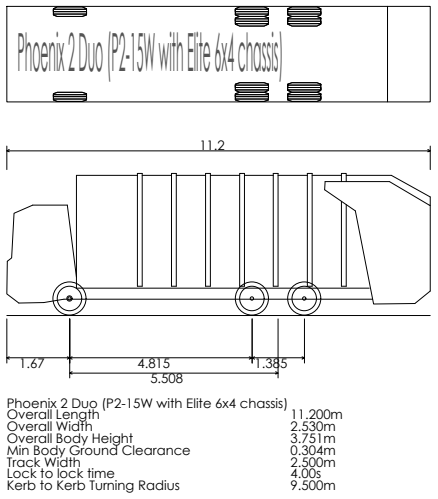

Standard Design Vehicle (SDV)	
Overall Length	4.800m
Overall Width	2.000m
Overall Body Height	1.950m
Min Body Ground Clearance	0.100m
Track Width	2.000m
Lock to lock time	4.00s
Wall to Wall Turning Radius	6.000m

P03	NJ	TST	Design notes added	23/01/24
P02	NJ	TST	Site layout updated	05/12/23
P01	NJ	TST	Initial issue	15/12/22
REV	DRAWN	CHECK	REVISION COMMENTS	ISSUE DATE
Swept Path Analysis				SHEET NO. 1
PROJECT New Access Havant Carehome, Bartons Road, Havant, Hampshire.				
CLIENT BRACKLEY				
SCALE @ A1 1:200				ENGINEER TST
PROJECT NUMBER 5244	STATUS S4	ISSUE PURPOSE TECHNICAL APPROVAL		DRAFT NJ
PROJECT BART	ORIGIN ICS	PHASE 01	LEVEL XX	ROLE DR
		TYPE C	NO. 0511	REVISION P03