
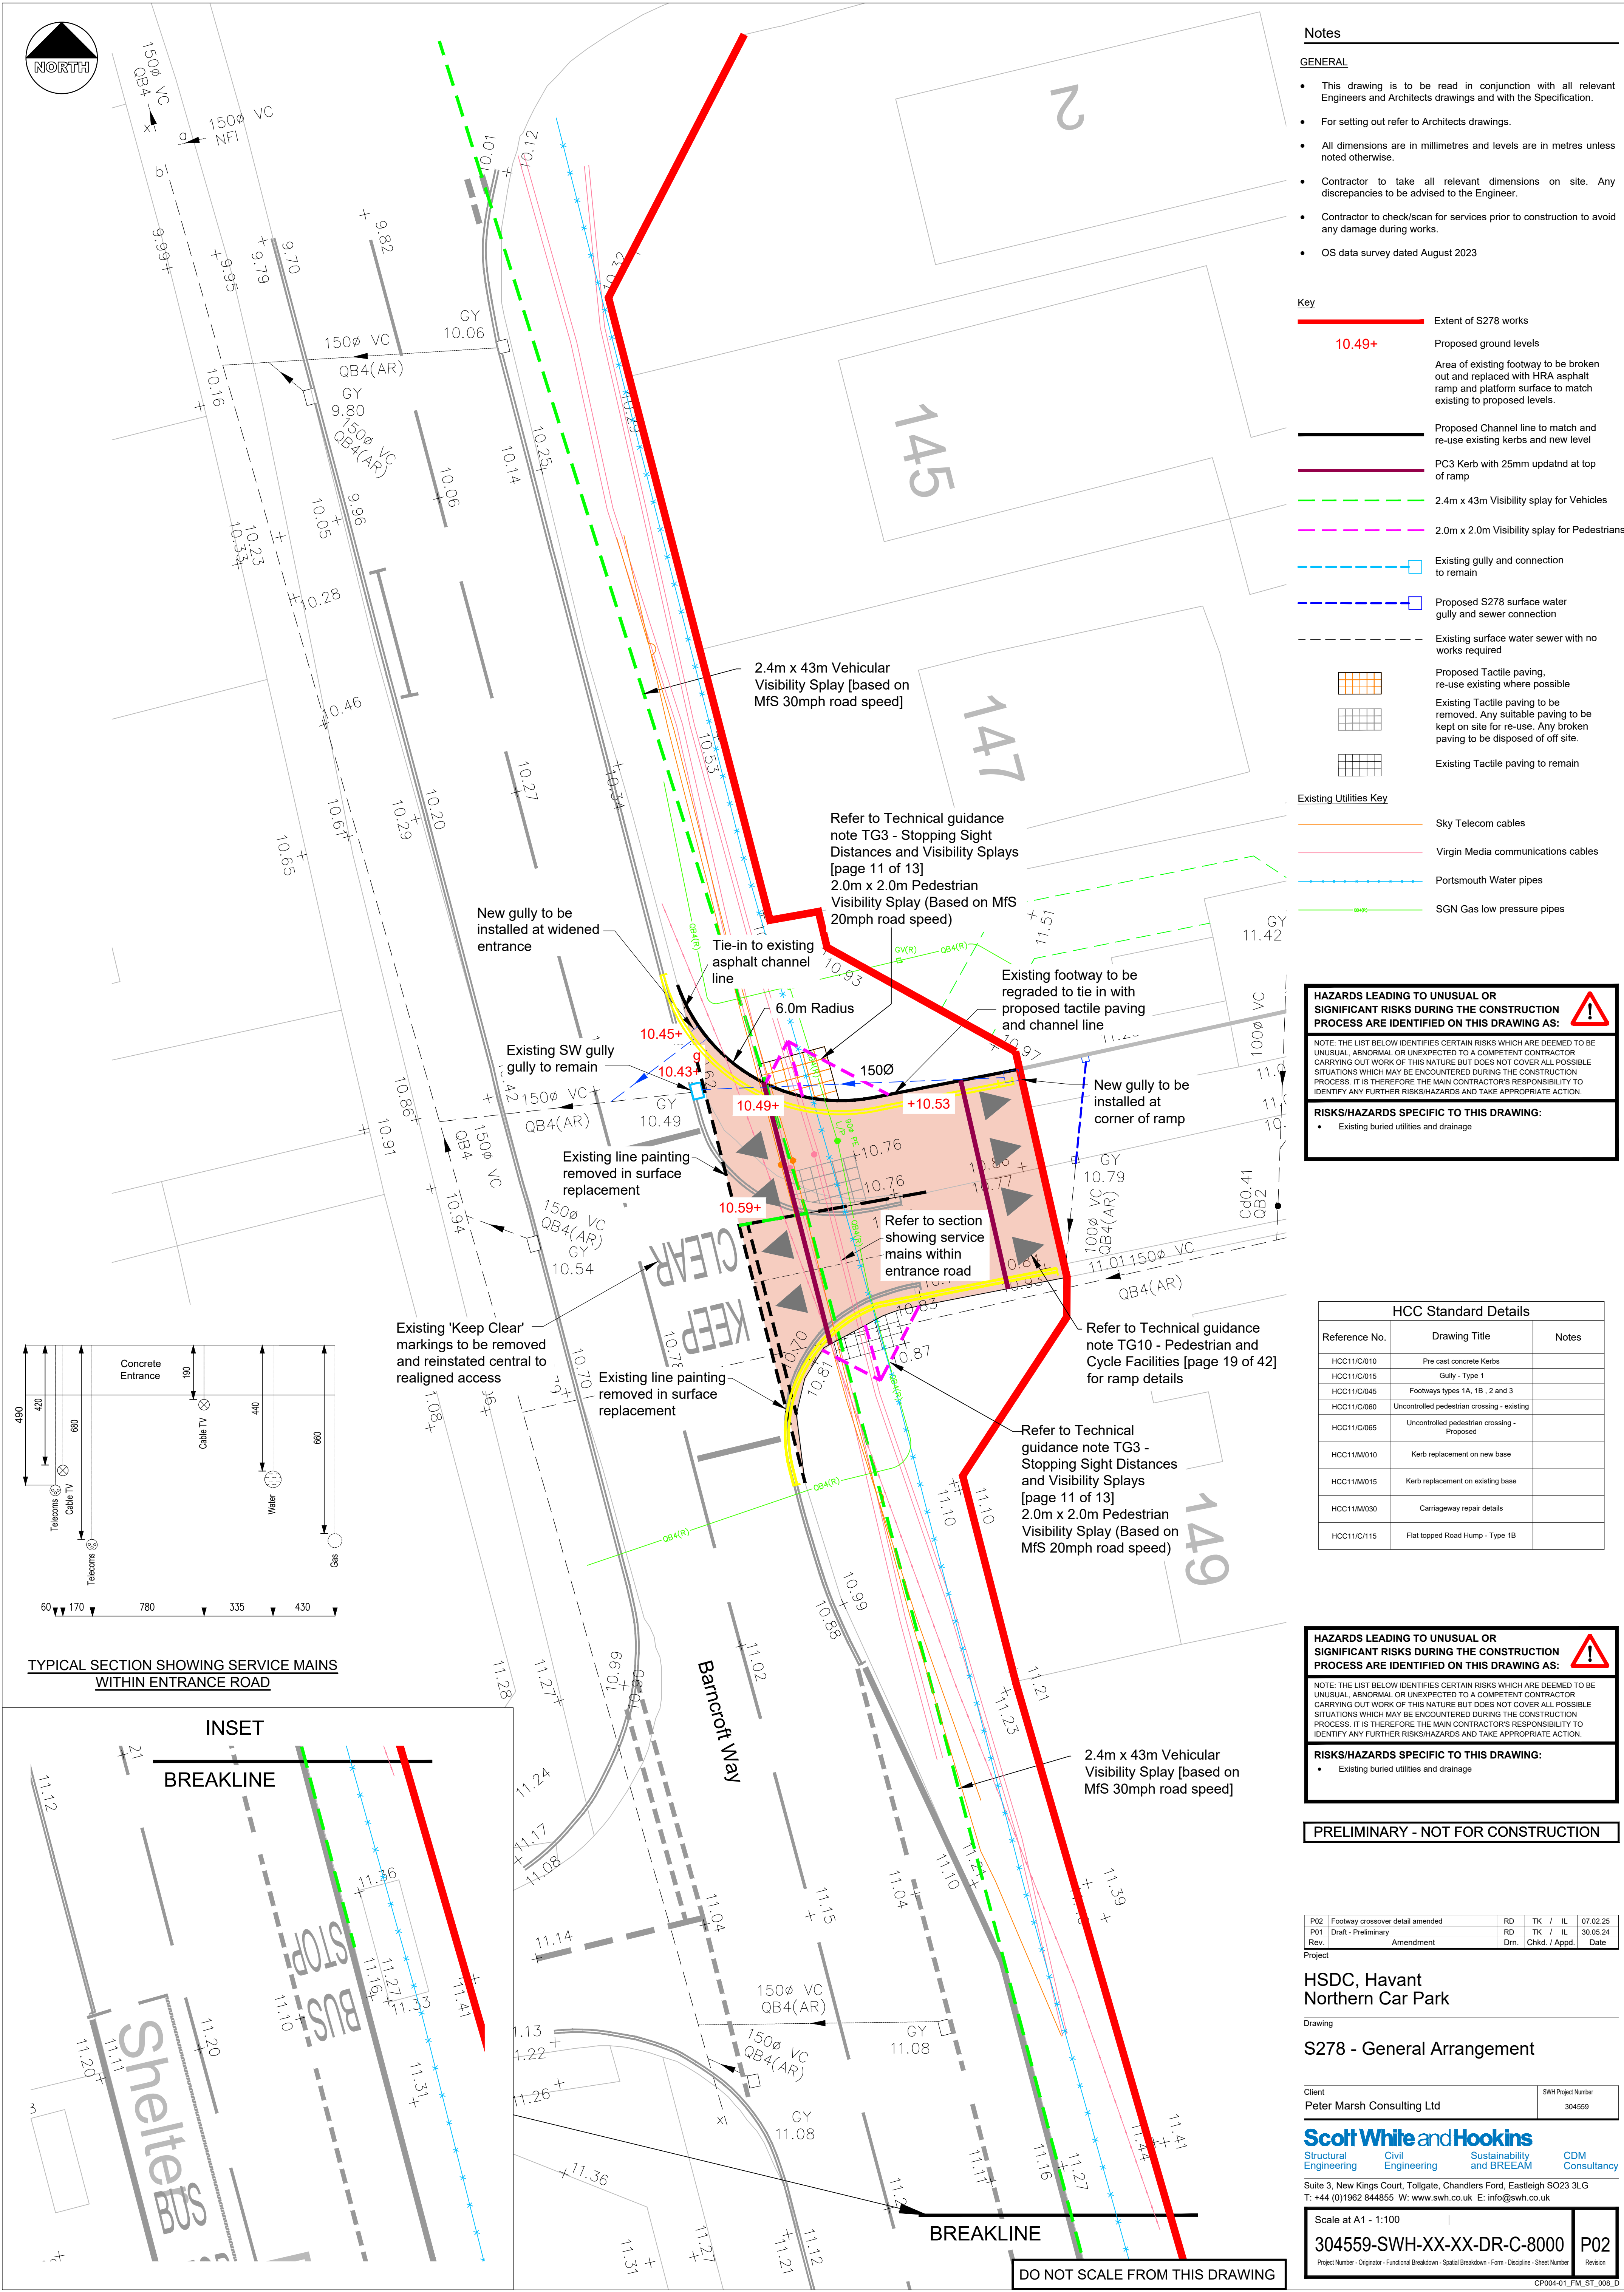





GENERAL

- | | |
|---|---|
|  | Extent of S278 works |
| 10.49+ | Proposed ground levels |
|  | Area of existing footway to be broken out and replaced with HRA asphalt ramp and platform surface to match existing to proposed levels. |
|  | Proposed Channel line to match and re-use existing kerbs and new level |
|  | PC3 Kerb with 25mm updatnd at top of ramp |
|  | 2.4m x 43m Visibility splay for Vehicles |
|  | 2.0m x 2.0m Visibility splay for Pedestrians |
|  | Existing gully and connection to remain |
|  | Proposed S278 surface water gully and sewer connection |
|  | Existing surface water sewer with no works required |
|  | Proposed Tactile paving, re-use existing where possible |
|  | Existing Tactile paving to be removed. Any suitable paving to be kept on site for re-use. Any broken paving to be disposed of off site. |
|  | Existing Tactile paving to remain |

Category	Approximate Value (per km²)
Sky Telecom cables	~850
Virgin Media communications cables	~750
Portsmouth Water pipes	~450
SGN Gas low pressure pipes	~100

NOTE: THE LIST BELOW IDENTIFIES CERTAIN RISKS WHICH ARE DEEMED TO BE UNUSUAL, ABNORMAL OR UNEXPECTED TO A COMPETENT CONTRACTOR CARRYING OUT WORK OF THIS NATURE BUT DOES NOT COVER ALL POSSIBLE SITUATIONS WHICH MAY BE ENCOUNTERED DURING THE CONSTRUCTION PROCESS. IT IS THEREFORE THE MAIN CONTRACTOR'S RESPONSIBILITY TO IDENTIFY ANY FURTHER RISKS/HAZARDS AND TAKE APPROPRIATE ACTION.

- Existing buried utilities and drainage

HCC Standard Details		
Reference No.	Drawing Title	Notes
HCC11/C/010	Pre cast concrete Kerbs	
HCC11/C/015	Gully - Type 1	
HCC11/C/045	Footways types 1A, 1B , 2 and 3	
HCC11/C/060	Uncontrolled pedestrian crossing - existing	
HCC11/C/065	Uncontrolled pedestrian crossing - Proposed	
HCC11/M/010	Kerb replacement on new base	
HCC11/M/015	Kerb replacement on existing base	
HCC11/M/030	Carriageway repair details	
HCC11/C/115	Flat topped Road Hump - Type 1B	

NOTE: THE LIST BELOW IDENTIFIES CERTAIN RISKS WHICH ARE DEEMED TO BE UNUSUAL, ABNORMAL OR UNEXPECTED TO A COMPETENT CONTRACTOR CARRYING OUT WORK OF THIS NATURE BUT DOES NOT COVER ALL POSSIBLE SITUATIONS WHICH MAY BE ENCOUNTERED DURING THE CONSTRUCTION PROCESS. IT IS THEREFORE THE MAIN CONTRACTOR'S RESPONSIBILITY TO IDENTIFY ANY FURTHER RISKS/HAZARDS AND TAKE APPROPRIATE ACTION.

- Existing buried utilities and drainage

PRELIMINARY - NOT FOR CONSTRUCTION

P02	Footway crossover detail amended	RD	TK / IL	07.02.25
P01	Draft - Preliminary	RD	TK / IL	30.05.24
Rev.	Amendment	Drn.	Chkd. / Appd.	Date
Project				

Drawing

S278 - General Arrangement

Client	SWH Project Number
Peter Marsh Consulting Ltd	304559

Scott White and Hookins
Structural Engineering Civil Engineering Sustainability and BREEAM CDM Consultancy

Suite 3, New Kings Court, Tollgate, Chandlers Ford, Eastleigh SO23 3LG
T: +44 (0)1962 844855 W: www.swh.co.uk E: info@swh.co.uk

Scale at A1 - 1:100

304559-SWH-XX-XX-DR-C-8000

Project Number - Originator - Functional Breakdown - Spatial Breakdown - Form - Discipline - Sheet Number

Revision

CP004-01_FM_ST_008_I