




Existing resurfaced hard standing

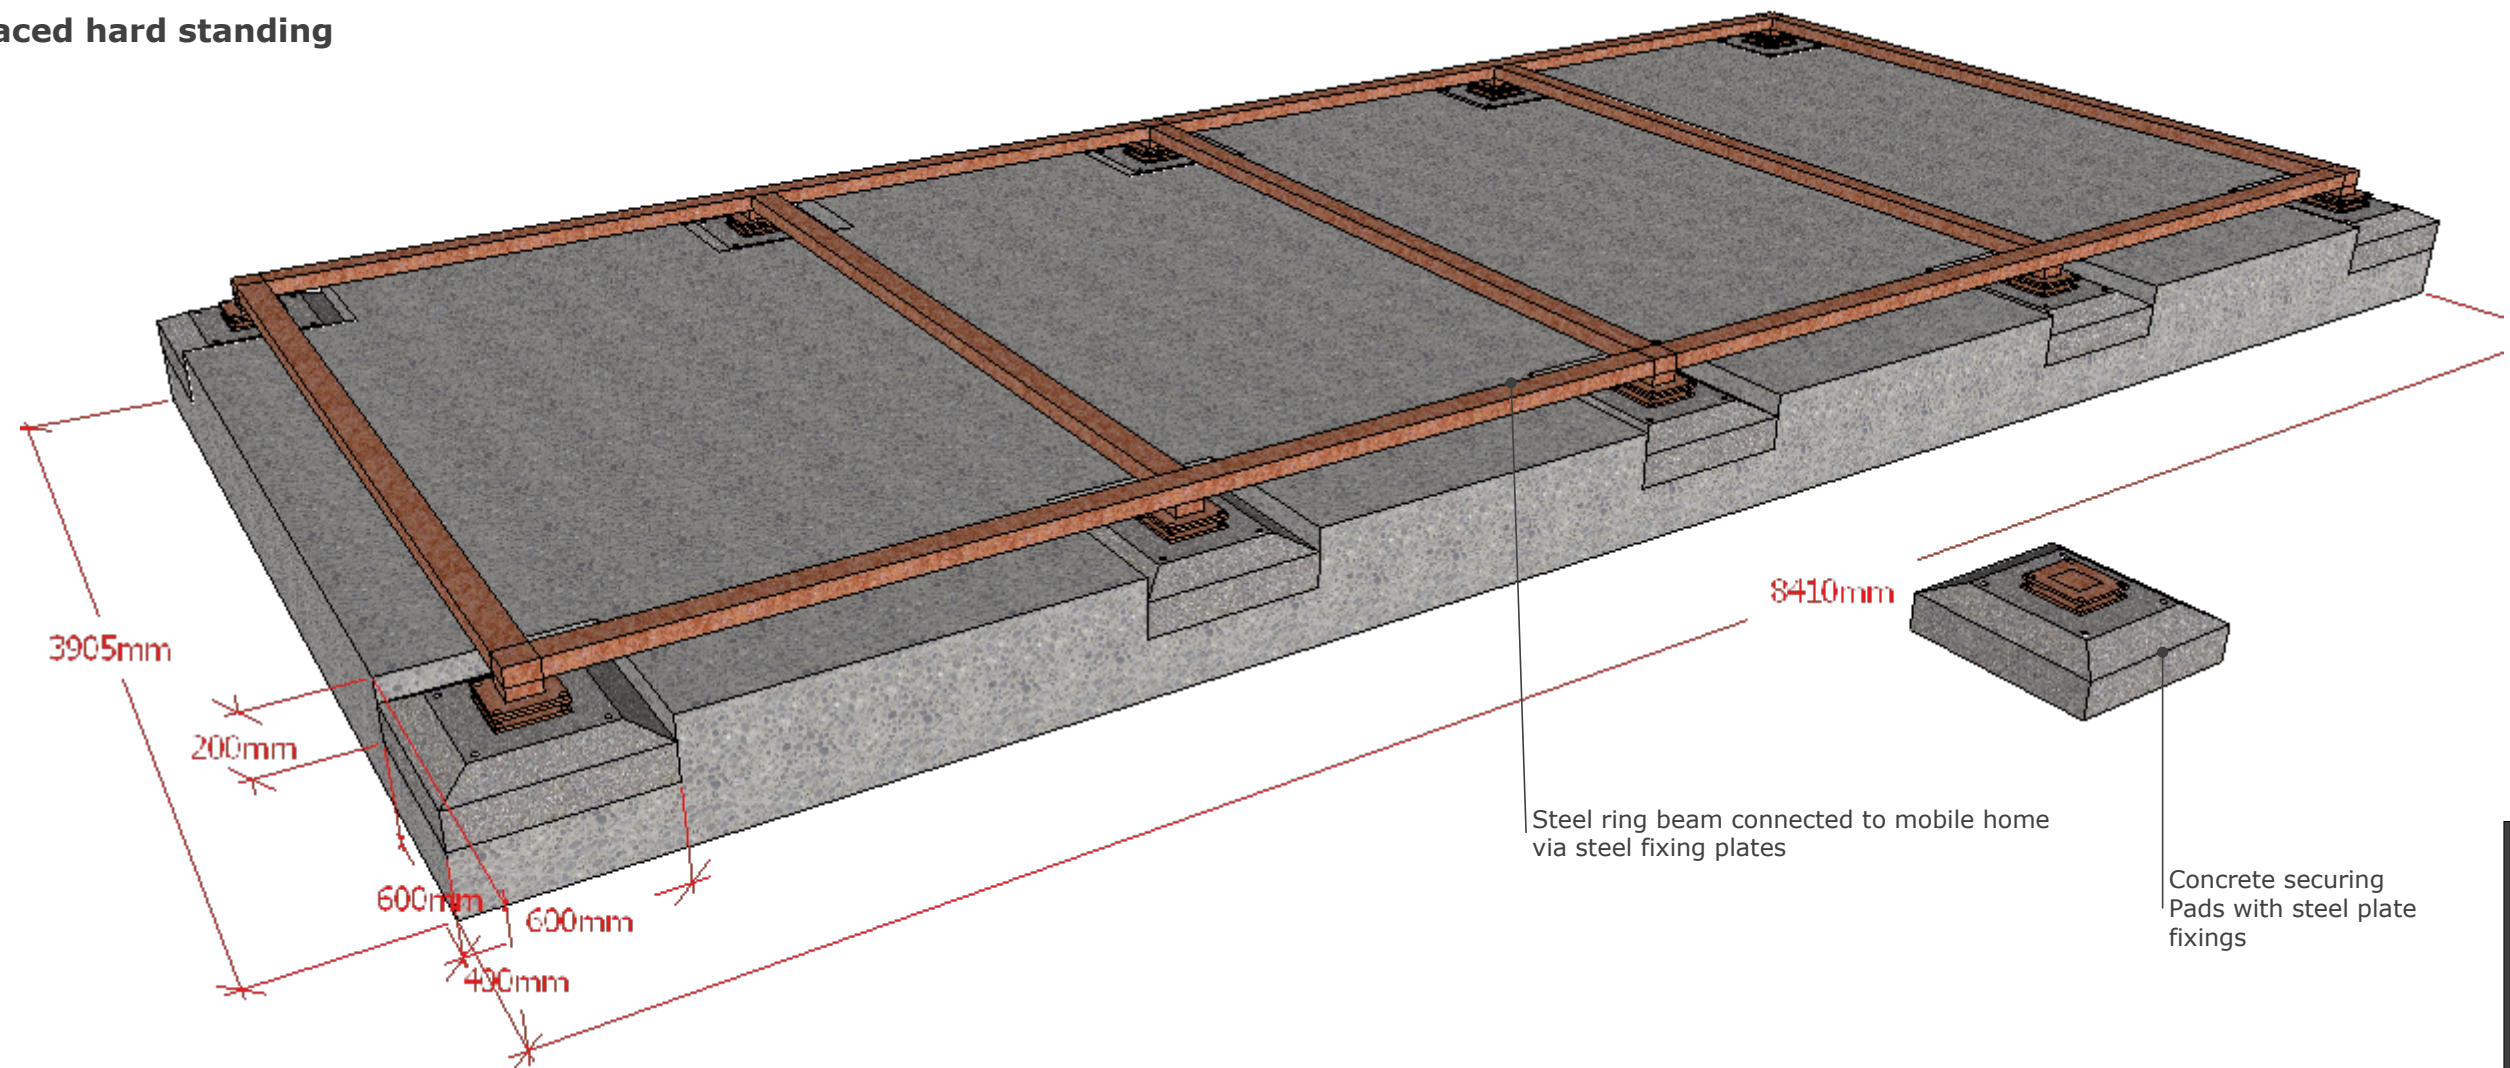

SIPs Panel Wall Section

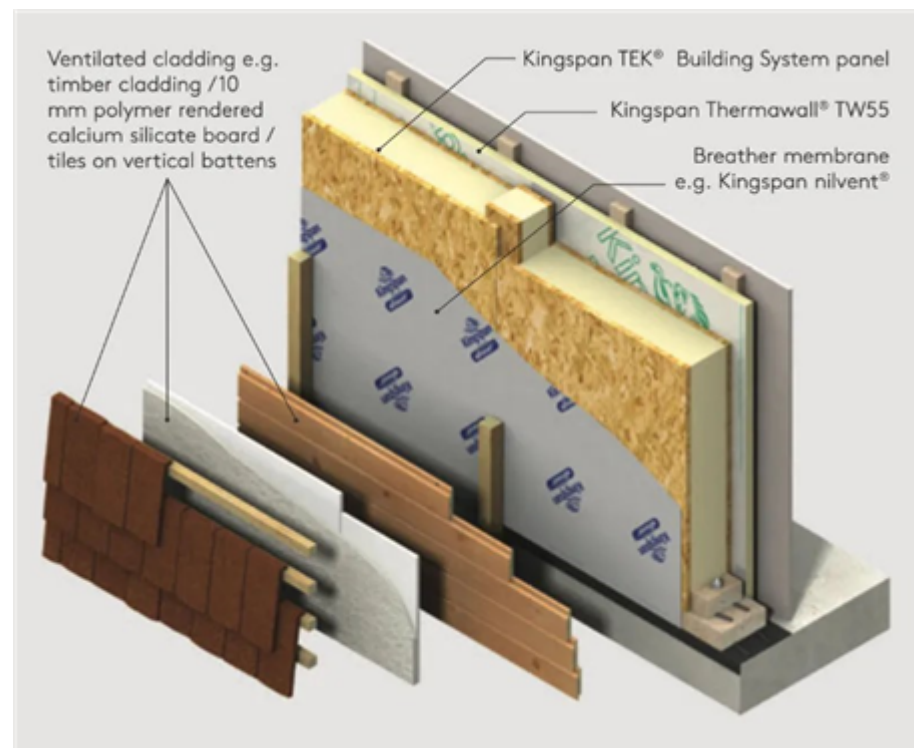

SIPs Panel Roof Section

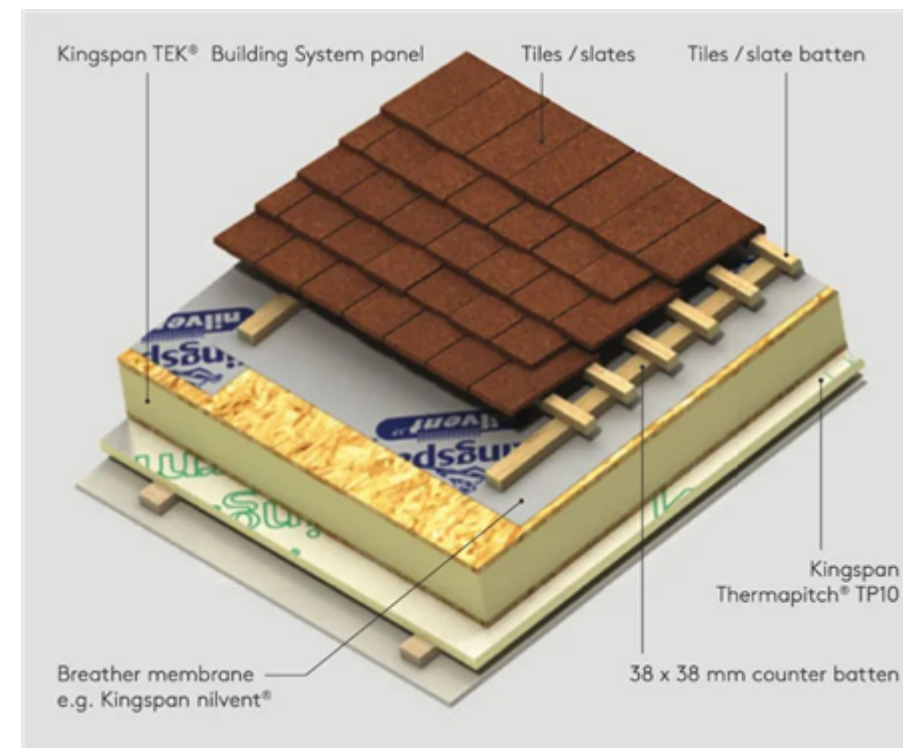

Concrete securing pads set to existing base
Steel ring beam is set to pads.
SIPs sections are brought to site and assembled on site.
the SIPs roof sections are assembled on site.

The large percentage of the mobile home is Produced off site in sections and transported to the site by lorry. Once off loaded the sections are hand carried to the rear and then assembled.

The final finish materials, wood boarding and Synthetic roof tile is applied on site.
Final interior finish is also applied on site.