Road 2

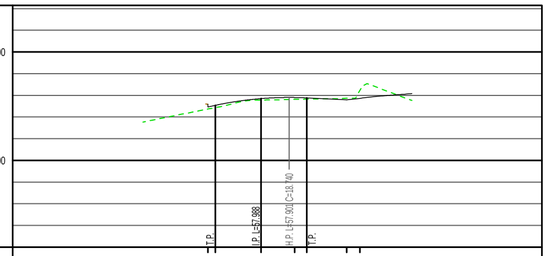

Datum: 51.000M AOD

CHAINAGE ON CENTRELINE (m)	0.000 1.000	12.261	20.000	22.823	32.041	33.041
LEVELS ON CENTRELINE OF CARRIAGEWAY (m)	57.988 57.938	57.848	57.839	57.880	57.786	57.801
LEVELS ON LEFT HAND CHANNEL (m)	57.841 57.790	57.797	57.848	57.829		
LEVELS ON RIGHT HAND CHANNEL (m)	57.841 57.790	57.797	57.848	57.829		
VERTICAL DESIGN ON CARRIAGEWAY CENTRELINE		HOG CURVE K = 4.000 L = 21.123		GRADIENT -1.0% L = 9.218m		
HORIZONTAL DESIGN ON CARRIAGEWAY CENTRELINE		STRAIGHT LENGTH = 32.041m				
EXISTING LEVELS (m)	57.366 57.430	57.789 57.780	57.811 57.827		57.847 57.864	

Road 3

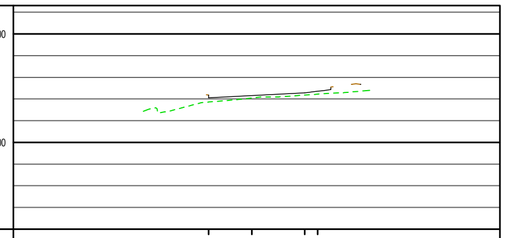

Datum: 51.000M AOD

CHAINAGE ON CENTRELINE (m)	0.000	10.000	22.201	25.199
LEVELS ON CENTRELINE OF CARRIAGEWAY (m)	57.061	57.161	57.283	57.358
LEVELS ON LEFT HAND CHANNEL (m)	56.986	57.086		
LEVELS ON RIGHT HAND CHANNEL (m)	56.986	57.086		
VERTICAL DESIGN ON CARRIAGEWAY CENTRELINE			GRADIENT 1.0% (1 in 100) LENGTH = 22.201m	
HORIZONTAL DESIGN ON CARRIAGEWAY CENTRELINE			STRAIGHT LENGTH = 22.201m	
EXISTING LEVELS (m)	56.858	57.045	57.148	57.180

Road 1

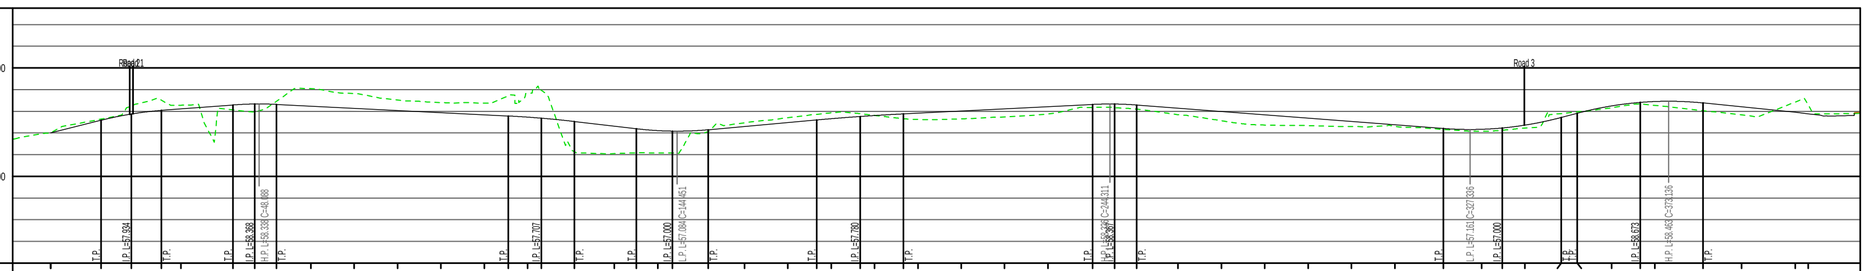

Datum: 51.000M AOD

| | | | | | |