


1. Pavement construction and surface finishes subject to Hampshire County Council approval under 538 of the Highways Act.
2. Carriageway pavement design assumes a nominal CBR of less than 2.5% (Ref. T & P Report 201806c_BRE18096_G3).
3. Quadrant kerbs to be provided at external corners of laybys.
4. Vehicular crossovers to have a maximum crossfall of 1 in 20. Back of roadway/service margins to be lowered locally to ensure crossfall is achievable.
5. All street furniture to be erected prior to final surfacing of footways.
6. Road coat to be applied between all bituminous surface layers prior to overlaying.
7. Bituminous surfacing work to be carried out in accordance with HCC Specification Appendix 7/11.
8. Block pavements to be specified by Contractor during tender process.
9. All kerbs to be a minimum length of 600mm where cutting is required.
10. All footways are to include geomembrane and geotextile at sub-grade and sub-base levels respectively, all footways to have 150mm thick sub-base layer. Refer to DWG. Z5418-ME-XX-00-DR-0-1001 for further details. Footways containing geotextile at binder level are to receive 40mm minimum thickness geotextile at base level. Refer to DWG. Z5418-ME-XX-00-DR-0-1001 for further details.

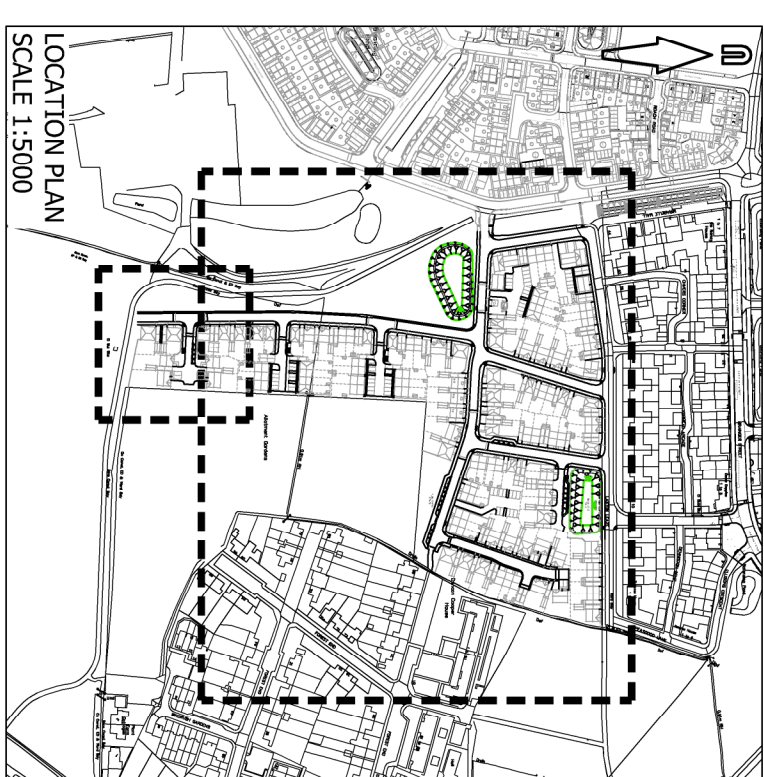

FOR CONSTRUCTION

P6	KEEBING NEAR PLOTS 40 TO 63 REVISED TO REFLECT REVISED ARCHITECTS LAYOUT	RH4	07/11/2022
P5	PRIVATE AREA BARBERS REVISED AS CLOUDED PAVEMENT TYPE 18 CONSTRUCTION UPDATED TO HCC COMMENTS 06/09/2022. KEEBING UPDATES, PAVEMENT TYPE 1E PRIVATE ROADS ADDED CONSTRUCTION ISSUE.	RH4	14/10/2022
P4		RH4	07/10/2022
P3		RH4	23/08/2022
P2	RAISED TABLE CONSTRUCTION DETAILS ADDED.	RH4	04/09/2022
P1	TENDER ISSUE	RH4	25/03/2022

rev.	amendment	checked	date
------	-----------	---------	------

project			
PHASE 3B			
BEREWOOD, WATERLOOVILLE			
scale		drawn by	checked by
1:500		KD	RHA
date		card file	
MARCH 2022		25418-MBL-XX-00-DR-D-0120	
title			

PAVEMENTS AND KERBING

Mayer Brown Limited jobcode	suitability	revision
BLHBWOOD_P3B	-	P6
drawing number		

25418-MBL-XX-00-DR-D-0120