
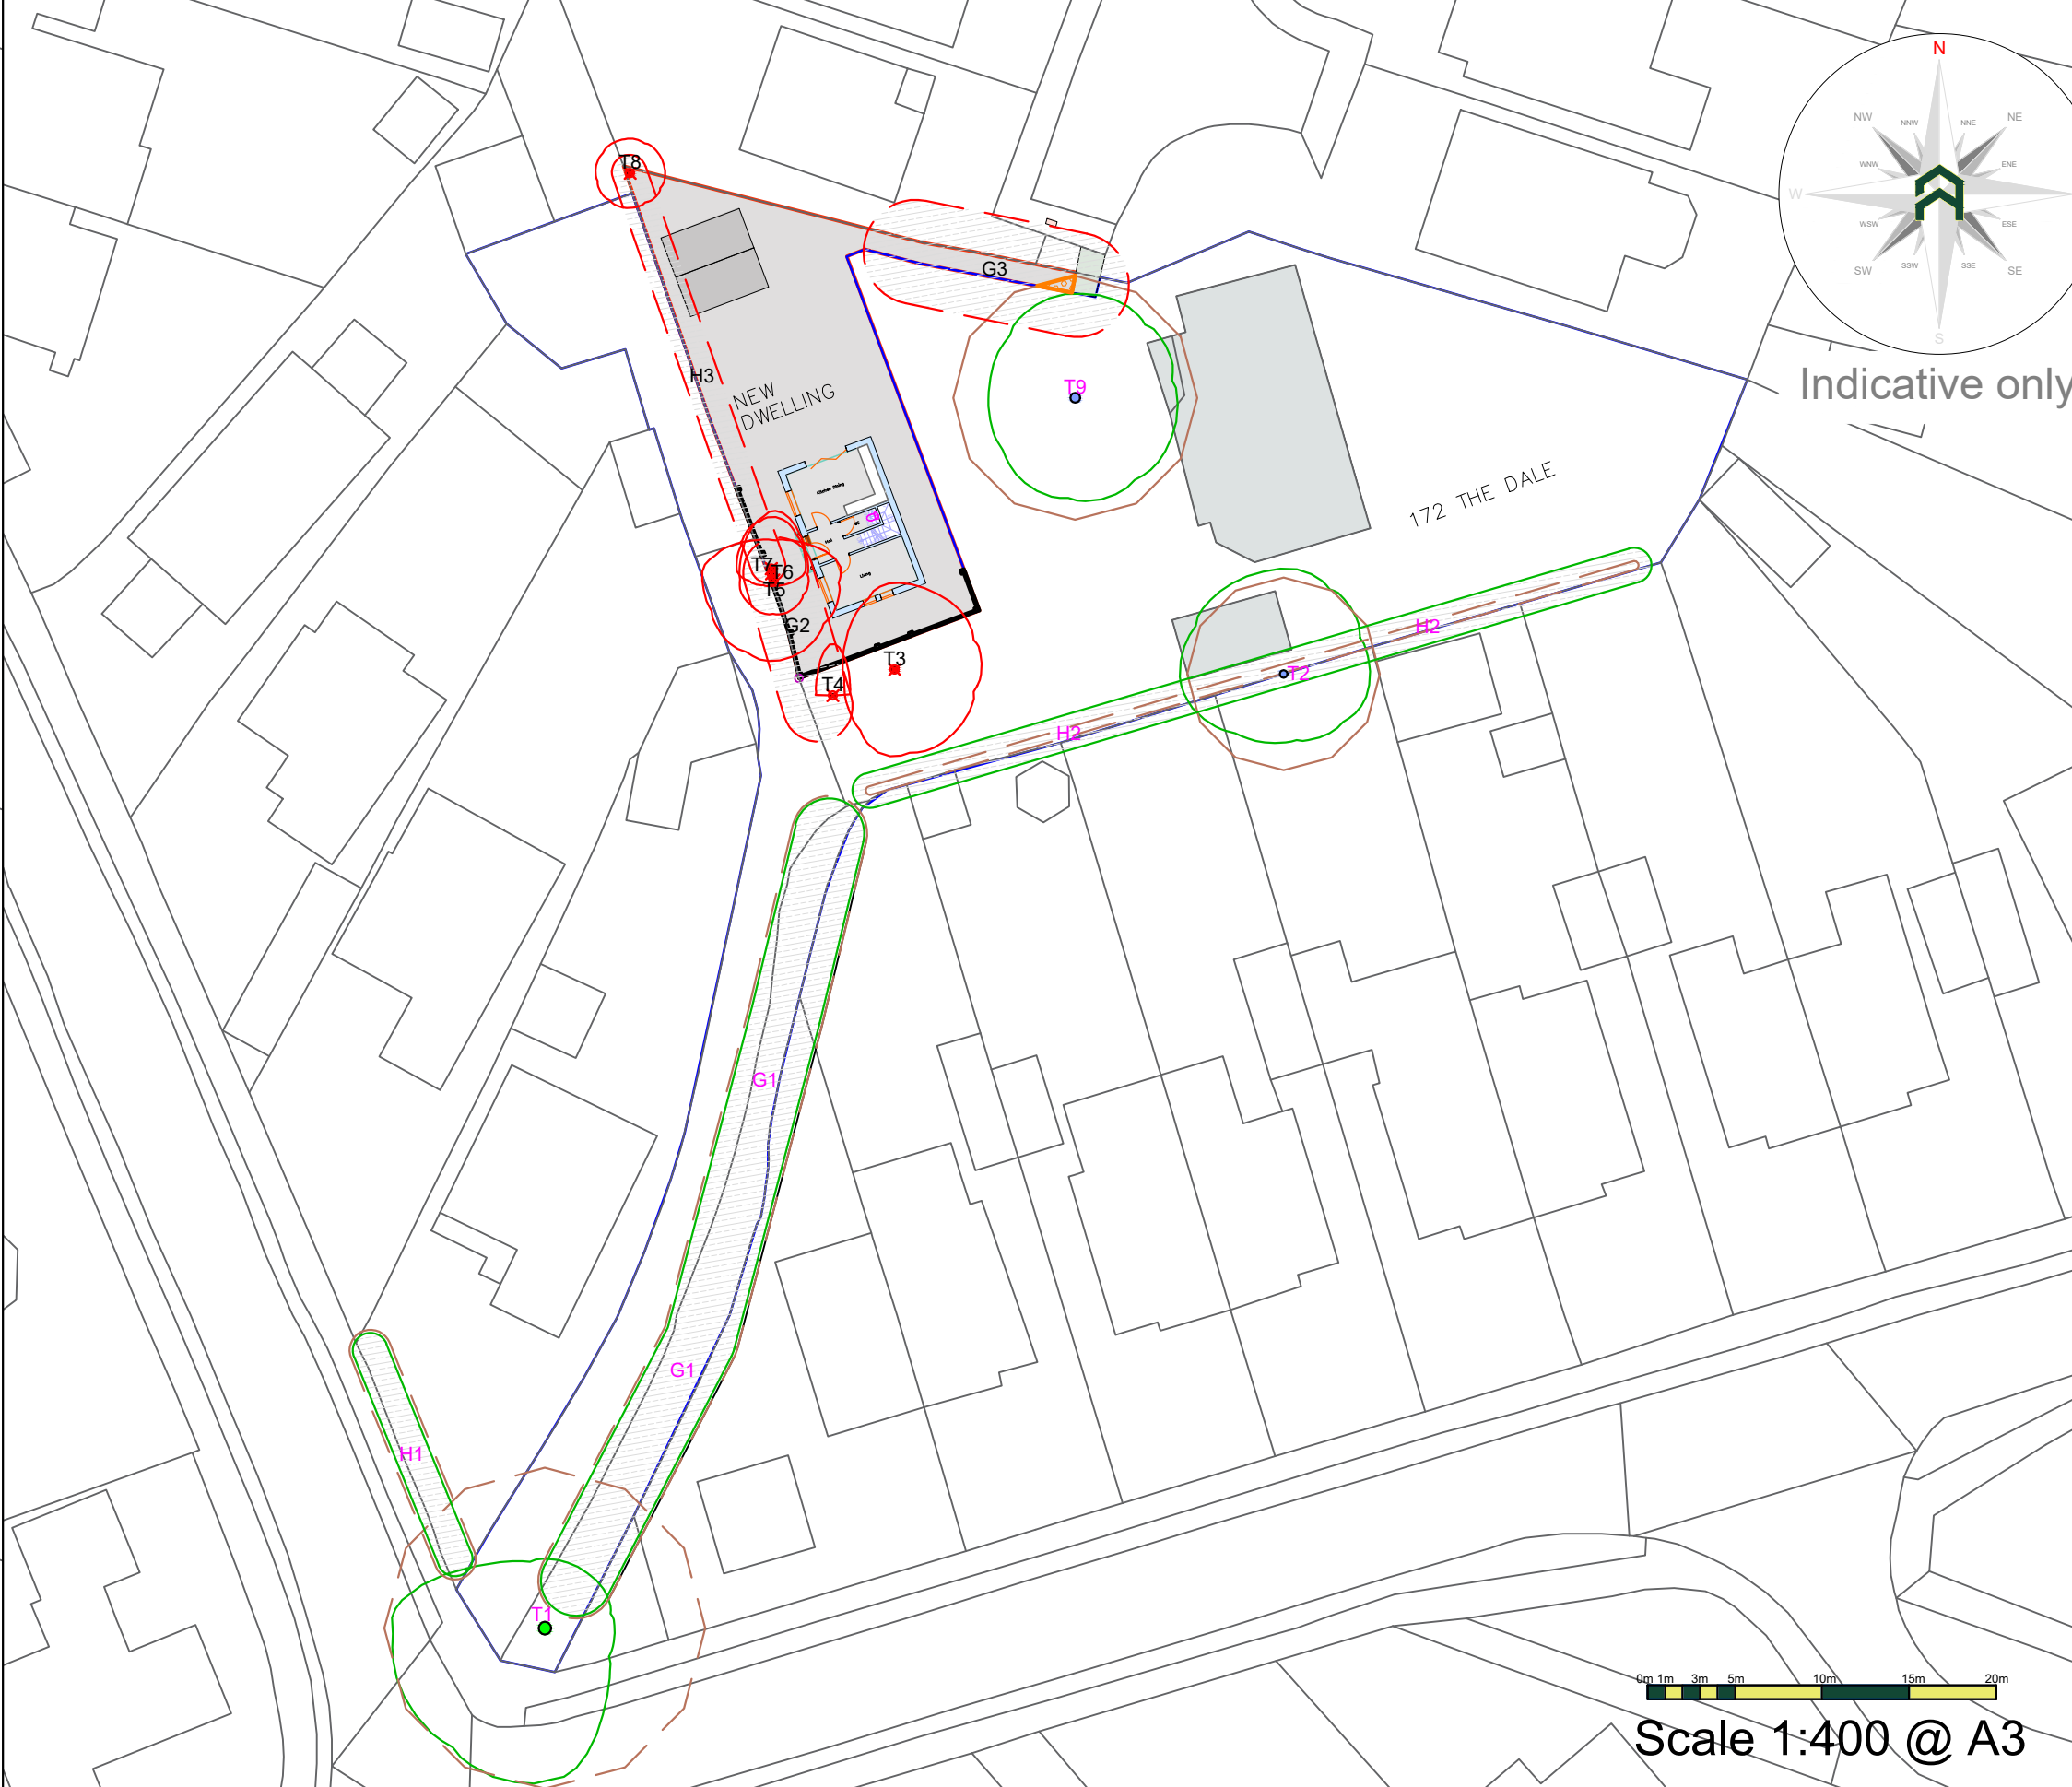


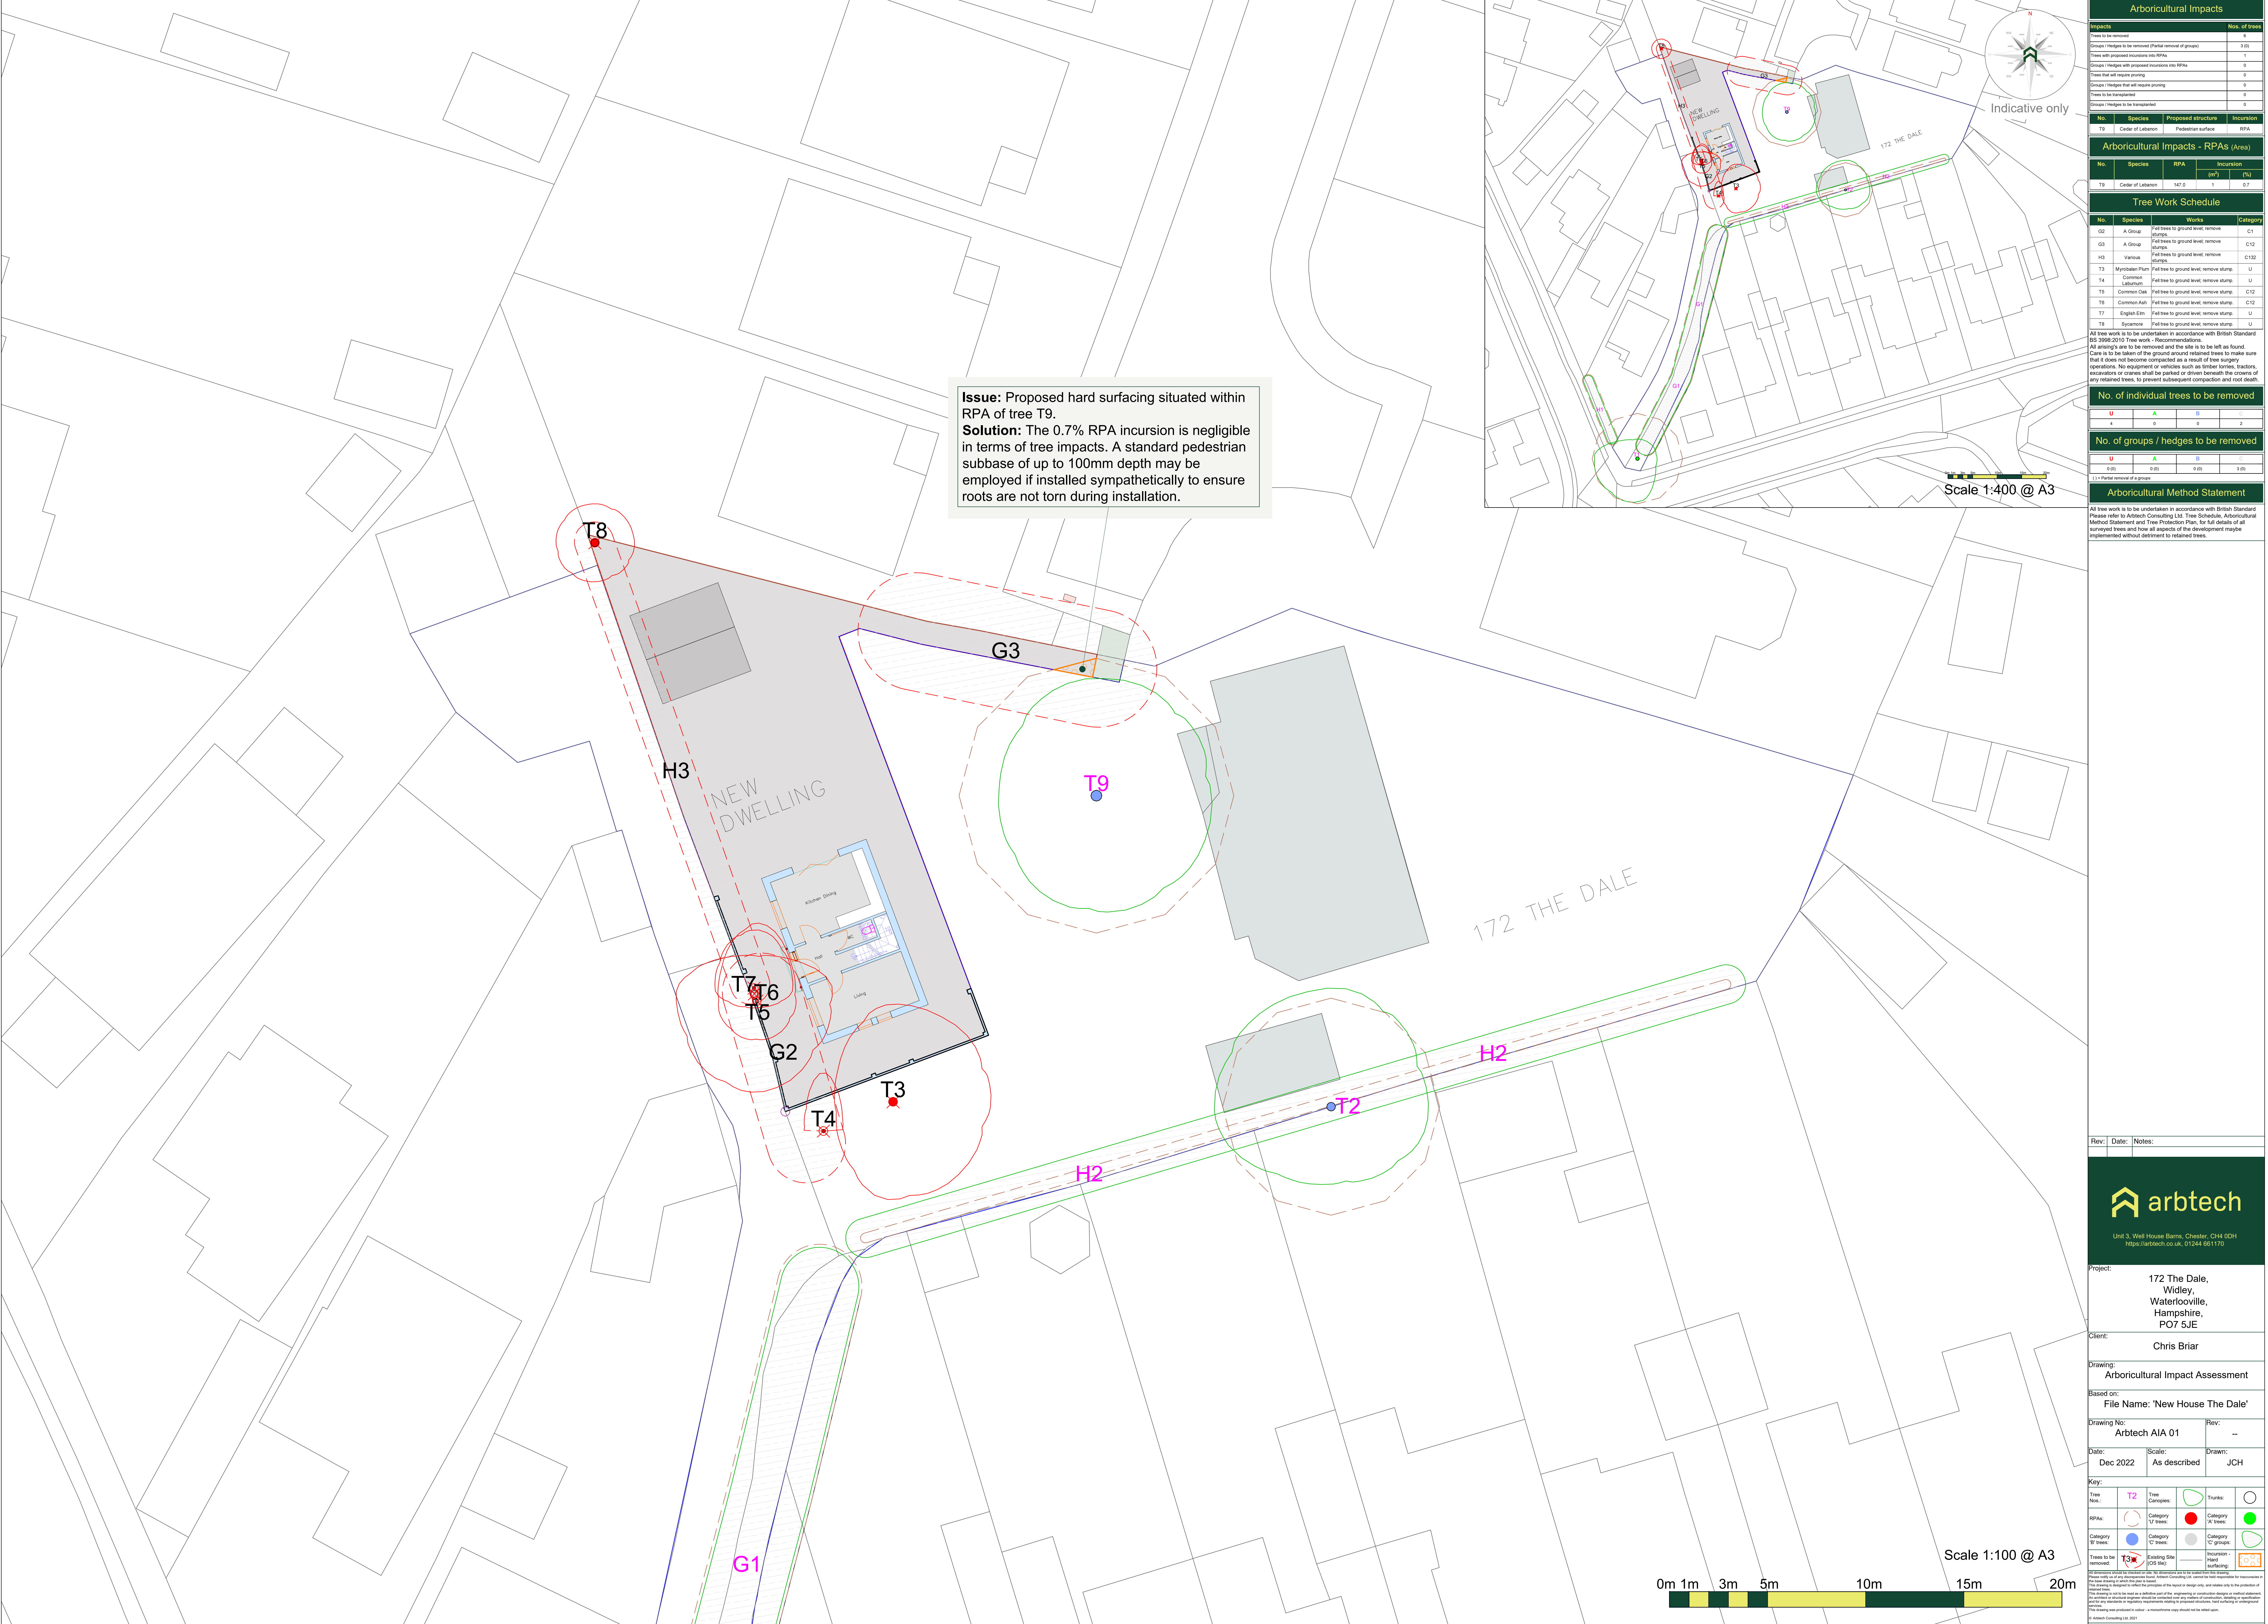

Arboricultural Impacts			
Impacts	Nos. of trees		
Trees to be removed	0		
Groups / Hedges to be removed (Partial removal of groups)	1		
Trees with proposed incursions into RPA	0		
Groups / Hedges with proposed incursions into RPA	0		
Trees that will require pruning	0		
Groups / Hedges that will require pruning	0		
Trees to be transplanted	0		
Groups / Hedges to be transplanted	0		
No.	Species	Proposed structure	Incursion
T9	Cedar of Lebanon	Pedestrian surface	RPA
Arboricultural Impacts - RPAs (Area)			
No.	Species	RPA	Incursion
T9	Cedar of Lebanon	147.0	1
Tree Work Schedule			
No.	Species	Works	Category
G2	A Group	Fall trees to ground level, remove stumps	C1
G3	A Group	Fall trees to ground level, remove stumps	C12
H3	Various	Fall trees to ground level, remove stumps	C132
T3	Myrsine Palm	Fall tree to ground level, remove stump	U
T4	Common Lilburnii	Fall tree to ground level, remove stump	C12
T5	Common Oak	Fall tree to ground level, remove stump	C12
T6	Common Oak	Fall tree to ground level, remove stump	C12
T7	English Elm	Fall tree to ground level, remove stump	U
T8	Sycamore	Fall tree to ground level, remove stump	U
All tree work to be undertaken in accordance with British Standard BS 3998:2010 Tree work - Recommendations. All stumps are to be removed and the site is to be left as found. Care is to be taken of the ground around retained trees to make sure that it does not become compacted as a result of tree surgery operations. No equipment or vehicles such as timber trucks, tractors, excavators or cranes shall be parked or driven beneath the crowns of any retained trees, to prevent subsequent compaction and root death.			
No. of individual trees to be removed			
U	A	B	C
4	0	0	2
No. of groups / hedges to be removed			
U	A	B	C
0 (0)	0 (0)	0 (0)	0 (0)
(-) = Partial removal of a group			
Arboricultural Method Statement			
All tree work to be undertaken in accordance with British Standard BS 3998:2010 Tree work - Recommendations. All stumps are to be removed and the site is to be left as found. Care is to be taken of the ground around retained trees to make sure that it does not become compacted as a result of tree surgery operations. No equipment or vehicles such as timber trucks, tractors, excavators or cranes shall be parked or driven beneath the crowns of any retained trees, to prevent subsequent compaction and root death.			

Rev:

Date:

Notes:

Unit 3, Well House Barns, Chichester, G14 0DH
http://arbtech.co.uk, 01243 681170

Project:

172 The Dale,
Widley,
Waterlooville,
Hampshire,
PO7 5JE

Client:

Chris Briar

Drawing:

Arboricultural Impact Assessment

Based on:

File Name: 'New House The Dale'

Drawing No:

Arbtech AIA 01

Rev: --

Date:

Dec 2022

Scale: As described

Drawn: JCH

Key:

Tree Nos.	T2	Tree Categories		Thunks	
RPAs		Category 'U' trees		Category 'A' trees	
Category 'B' trees		Category 'C' groups		Category 'C' groups	
Trees to be removed	T3	Existing Site (OS file)		Incursion - Hard surfacing	

© Arbtech Consulting Ltd. 2021

Arbtech Consulting Ltd. 2021