


SG 8640 – Electrically Operated Tensioned Roller Blind

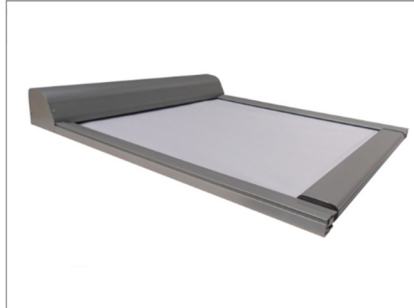


SG 8640 is a technical product that requires installation, servicing and maintenance by professionals with the appropriate skills. If in doubt, please contact us for further details.

System Overview


- Motorised rectangular blackout tension screen with no light gaps
- Suitable for use as a skylight or vertical blind
- Spring mechanism which constantly holds the fabric flat and intelligently adapts to the environment
- Fabric is 'zipped' into the side profiles for no light gap
- Can be installed in any running direction

Headbox

There are 2 headbox sizes:

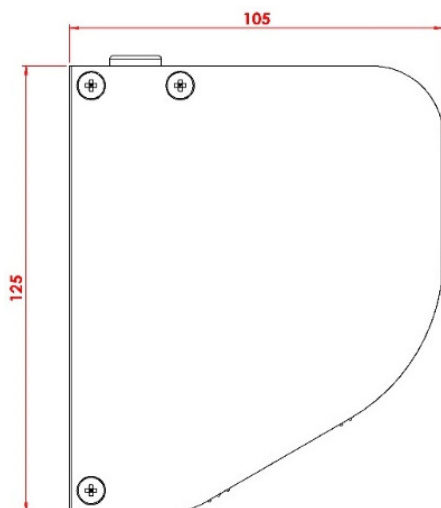

Up to 3000mm: 105mm x 125mm

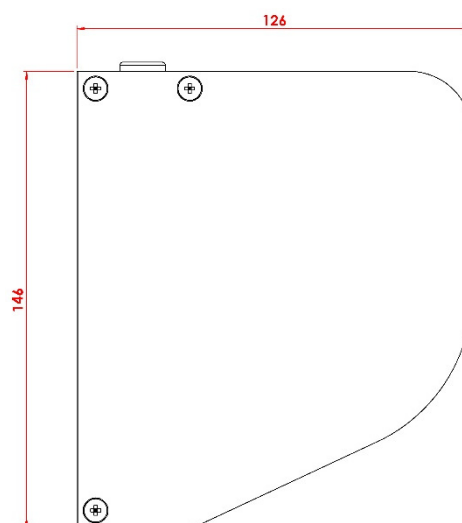

Over 3000mm: 126mm x 146mm

System Dimensions

- Draw/Drop: up to 4500mm (over 3000mm uses larger headbox)
- Width: 650mm – 3000mm
- Fabric area: Max 13m²


System Details

- Side profiles: Aluminium
- Brackets: Aluminium
- Finish: Standard White Powder Coated
- Fabric Tension: >100N

Fitting


- Fixing load: ≤ 5kg per fixing point
- **Important:** consult fitting instructions prior to installation.

Face Fix – direct

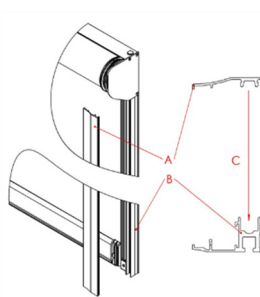

Side profiles dimensions when assembled:
W 54mm x D 29mm

Recess Fix – direct

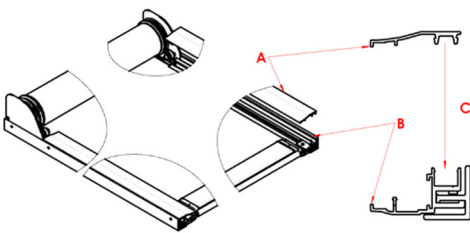

Side profile dimensions when assembled:
W 60mm x D 32mm

Motors and Controls

- System uses hard wired 240V motor
- Controlled by either SG 9940/SG 0450 Radio Remote Controls with external receivers.
- Refer to wiring diagram from Silent Gliss