



Ashmore

Size of tile	267mm x 333mm
Minimum pitch*	22.5°
Maximum pitch	90°
Minimum headlap	77mm
Maximum gauge	190mm
Cover width	302mm (nominal)
Hanging length	235mm (nominal)
Covering capacity (net)	17.5 tiles/m ² at 77mm headlap 19 tiles/m ² at 92mm headlap
Weight of tiling (approx.)	48 kg/m ² (0.47 kN/m ²) at 77mm headlap 52 kg/m ² (0.51 kN/m ²) at 92mm headlap
Battens required (net)	5.3 lin.m/m ² at 77mm headlap 5.8 lin.m/m ² at 92mm headlap
Batten size recommended	38 x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50 x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Tile nails	45mm x 3.35mm
Fixing clips	Eaves, verge and tile clips


* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service for further information.

Ashmore tiles should be laid broken-bond. The required broken-bond pattern is created by the introduction of three quarter width tiles in alternate courses. Tile-and-a-half tiles are available for use at hips and valleys.

Old English Dark Red
(smooth finish)



Smooth Brown (smooth finish)

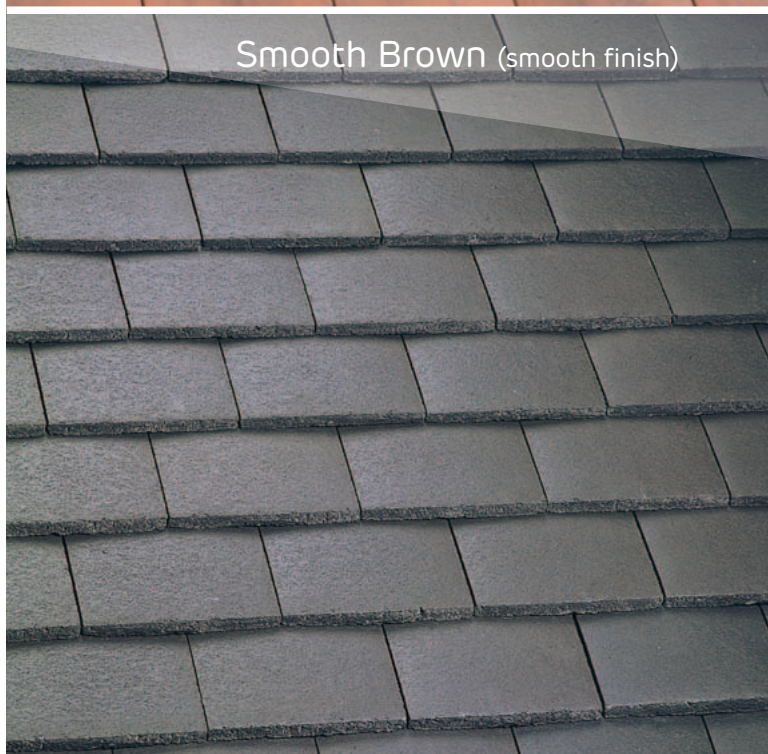

Smooth Grey (smooth finish)

