

available colors:

- .06 grey
- .08 anthracite
- .09 bronze



Body made of extruded, corrosion resistant, aluminium alloy. Closing head made in corrosion resistant and painted die cast aluminium. Protection with anodizing treatment, epoxy powder base coating and polyester painting. A4 stainless steel screws. 5mm thick transparent tempered glass diffuser. Cable input Ø 8-13mm.

Corps en aluminium extrudé résistant à la corrosion. Tête en aluminium moulé sous pression résistant à la corrosion. Protection de l'ensemble par traitement d'anodisation, avec primaire époxy et peinture polyester. Vis en acier inoxydable A4. Diffuseur en verre trempé transparent de 5mm d'épaisseur. Entrée de câble Ø 8-13mm.



WEINGUT KELLER,
OBERBERGEN



- 1 No visible screws
- 2 Possibility of upper head free rotation
- 3 Quick wiring by connector in the product base plate
- 4 Floor fixing plate hidden in the body
- 5 Fixed to the ground by tie-rod or dowels
- 6 Opal upper glass, available as "SOFT" version

- 1 Sans vis apparentes
- 2 Possibilité de rotation de tête
- 3 Câblage rapide grâce au connecteur situé dans la base du produit
- 4 Fixation au sol dissimulée dans le corps
- 5 Fixation au sol par tirefond ou chevilles
- 6 Tête avec verre supérieur opalisé disponible sur la version SOFT



LED
230V

H. 200 mm

POWER SUPPLY INCLUDED

**40 32 6X2**

12W LED
220-240V 50/60Hz
power supply included
Class I

A A+ A++How to create
the product code?

WHITE versions available:

1 = 3000K (1740 lm)

6 = 4000K (1830 lm)



LAMP
230V

H. 200 mm



POWER SUPPLY INCLUDED

**40 30 611**



HIT-TC-CE 20W
G8,5
1700 lm
220-240V 0/50/60Hz
power supply included
Class I

A A+**40 30 621**



HIT-CE 35W
G12
3600 lm
220-240V 0/50/60Hz
power supply included
Class I

A A+**40 30 641**

TC-TEL 18W
GX24q-2
1200 lm
220-240V 0/50/60Hz
power supply included
Class I

A**40 30 651**



TC-TEL 26W
GX24q-3
1800 lm
220-240V 0/50/60Hz
power supply included
Class I

ALAMP
230VSOFT
H. 200 mm


POWER SUPPLY INCLUDED

**40 31 641**

TC-TEL 18W
GX24q-2
1200 lm
220-240V 0/50/60Hz
power supply included
Class I

A

Technical data



ACCESSORIES

89 44 010
180° Shutter
Obturbateur 180°



89 50 003
Tie-rod
Tirefond



LED
230V

POWER SUPPLY INCLUDED

H. 620 mm

40 52 6X2

17W LED
220-240V 50/60Hz
power supply included
Class I

A A+ A++How to create
the product code?

WHITE versions available:

1 = 3000K (2400 lm)

6 = 4000K (2510 lm)



LAMP
230V

POWER SUPPLY INCLUDED



H. 620 mm

40 50 611



HIT-TC-CE 20W
G8,5
1700 lm
220-240V 0/50/60Hz
power supply included
Class I

A A+**40 50 621**

HIT-CE 35W
G12
3600 lm
220-240V 0/50/60Hz
power supply included
Class I

A A+**40 50 651**



TC-TEL 26W
GX24q-3
1800 lm
220-240V 0/50/60Hz
power supply included
Class I

ALAMP
230V

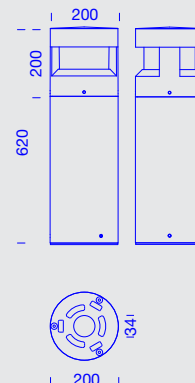
POWER SUPPLY INCLUDED

SOFT
H. 620 mm**40 51 641**

TC-TEL 18W
GX24q-2
1200 lm
220-240V 0/50/60Hz
power supply included
Class I

A

Technical data



ACCESSORIES

89 44 010
180° Shutter
Obturbateur 180°



89 50 001
Tie-rod
Tirefond



LED
230V

POWER SUPPLY INCLUDED

H. 1050 mm

**40 82 6X2**

37W LED
220-240V 50/60Hz
power supply included
Class I

A A+ A++**How to create
the product code?**

WHITE versions available:

1 = 3000K (4355 lm)

6 = 4000K (4520 lm)



LAMP
230V

POWER SUPPLY INCLUDED



H. 1050 mm

**40 80 621**



HIT-CE 35W
G12
3600 lm
220-240V 0/50/60Hz
power supply included
Class I

A A+**40 80 631**

HIT-CE 70W
G12
7300 lm
220-240V 0/50/60Hz
power supply included
Class I

A A+**40 80 651**



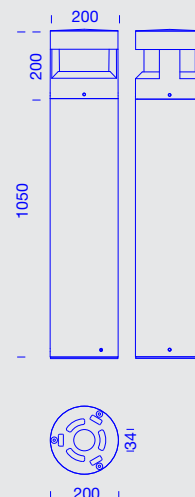
TC-TEL 26W
GX24q-3
1800 lm
220-240V 0/50/60Hz
power supply included
Class I

ALAMP
230V

POWER SUPPLY INCLUDED

SOFT
H. 1050 mm**40 81 641**

TC-TEL 18W
GX24q-2
1200 lm
220-240V 0/50/60Hz
power supply included
Class I

A**Technical data****ACCESSORIES**

89 44 010
180° Shutter
Obturateur 180°



89 50 001
Tie-rod
Tirefond