
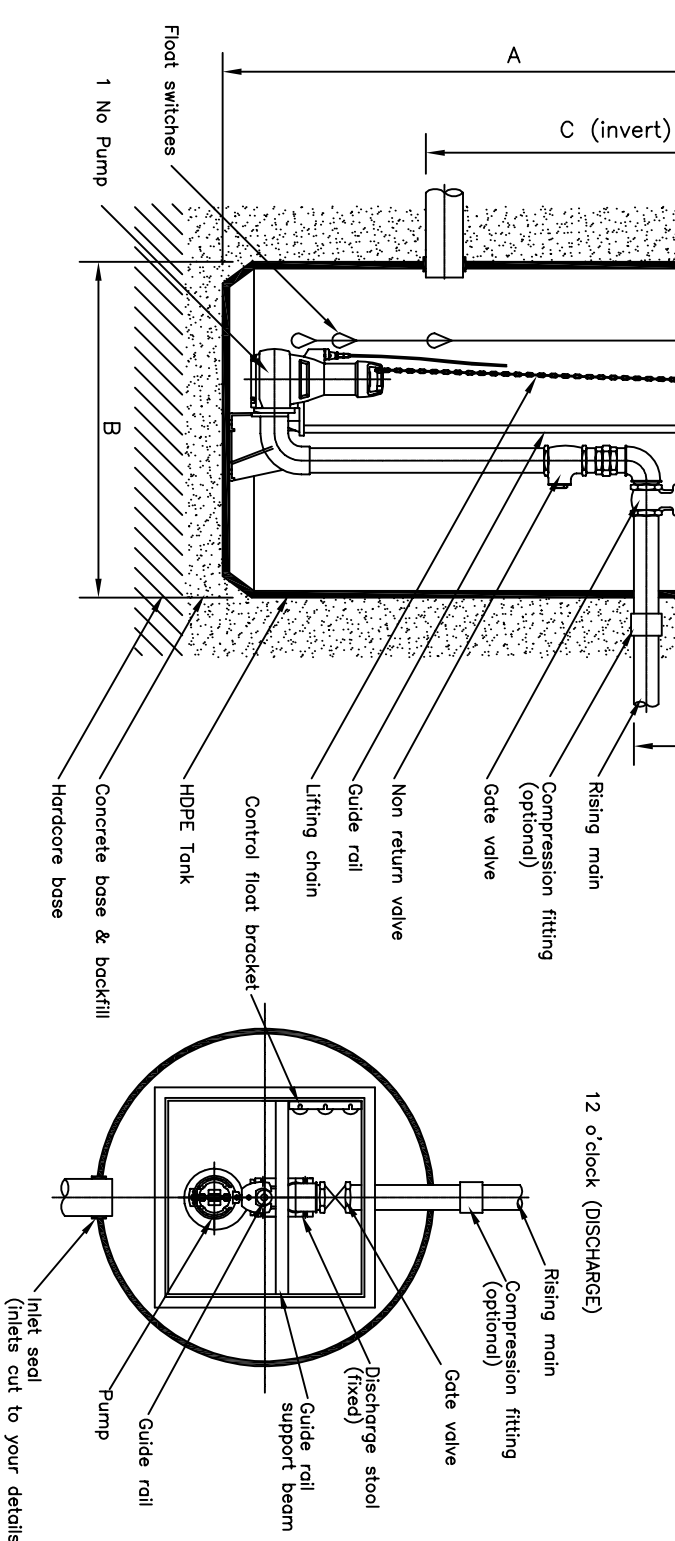
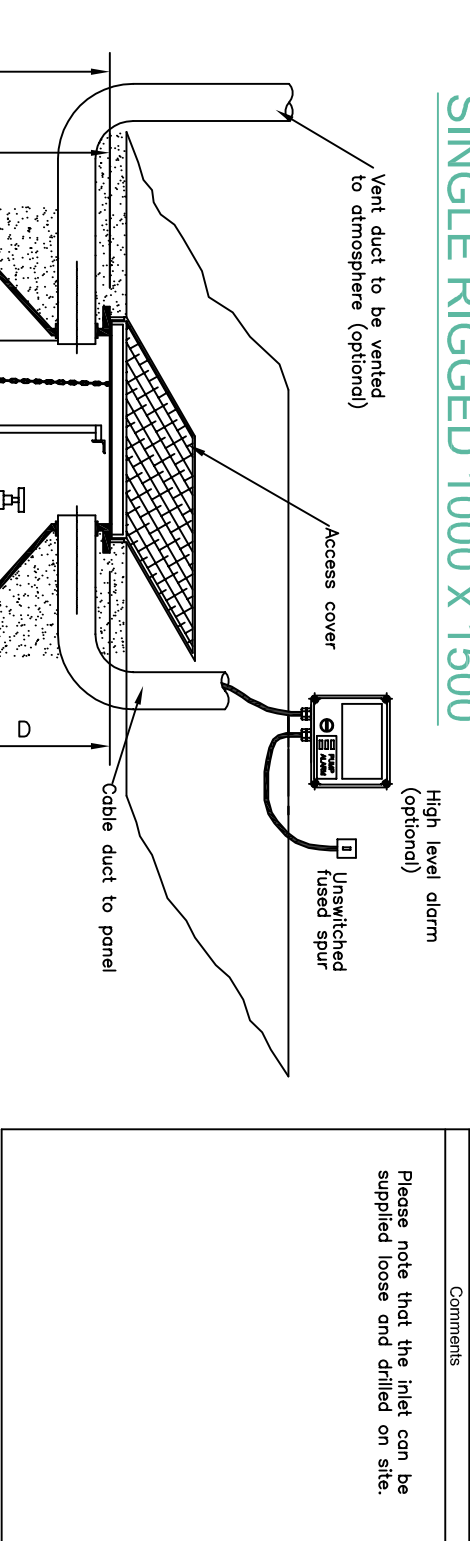


SINGLE RIGGED 1000 x 1500

TECHNICAL SPECIFICATION		
Power supply	230v	/415v
Motor rating	0.75kW	- 1.5kW
Frequency	50	HZ
Revolutions per min.	2850	
Max. vertical output	10m	
Max. horizontal output	200m	
Max. flow rate	8 l/s	
Max. liquid temperature	40 deg. C	
Discharge size	63/90	O.D MDPE
Cable length	10m	

ACCESS COVER (CLEAR OPENINGS)		
LENGTH (mm)	WIDTH (mm)	TYPE
750	600	5 TONNE

FABRICATION SPECIFICATIONS		
ITEM	INDEX DEPTH DIAMETER	CLOCK FACE POSITION
Tank depth	A 1500	
Tank Ø	B	1000
Inlet	C1	110
Inlet	C2	
Inlet	C3	
Inlet	C4	
Discharge	D 500	63/90 12
Cable duct		110
Vent		

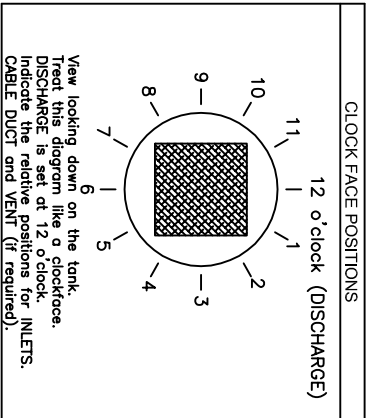

SIDE ELEVATION

PLAN VIEW

Comments

Please note that the inlet can be supplied loose and drilled on site.

PLEASE NOTE THAT THIS DOCUMENT MUST BE READ IN CONJUNCTION WITH THE INSTALLATION & OPERATING GUIDELINES.

DRAWING NOT TO SCALE

Customer.	Drawing No.
Project.	Date.
Project address.	Drawn by.
	Checked by.