


External Steel Security Door Specification

- Frame constructed of 2mm galvanised steel & polyurethane insulation.
- Door constructed of 1mm galvanised steel door skins, reinforced with 4mm steel skeleton, 35mm polyurethane insulation
- Anti-jemmy bolts on spine of door.
- Door complete with robust, anodised furniture.
- Georgian wired glass vision panels.
- Disabled threshold.
- Doors can be fitted with 10 point locking if required.
- (4 locking bolts in the upright of the frame and 2 bolts into both top and bottom of framework, euro cylinder)



Typical Fire Exit Door

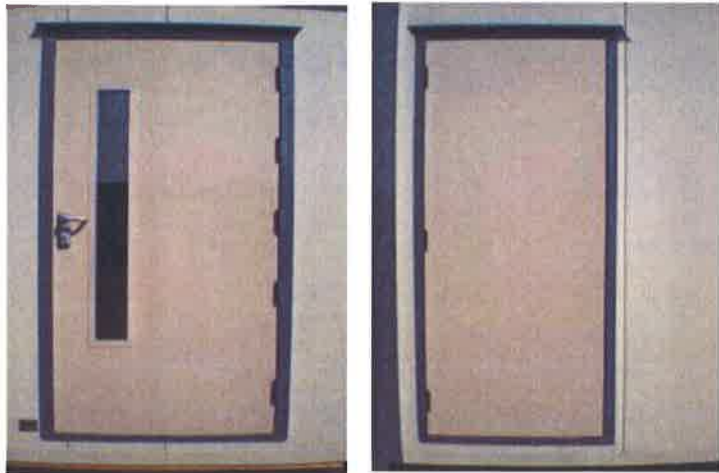

Typical Entrance Door

