


Profile Drawings:

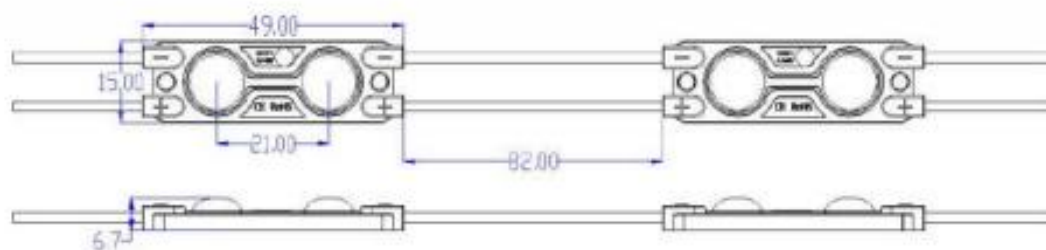

Specification

Applications

- * Suitable for 6 ~ 16cm depth signs such as channel letters, metal letters, light boxes, decoration, etc.

Features

1. High luminous efficacy 5050 SMD LED mounted.
2. High light effective; No light decay after working 1000Hrs; With 50000Hrs lifespan.
3. Overmolded housing design with 160degree lens, nice and upscale.
4. Certification: CE, RoHS

Installation

1. 3M adhesive tape backing on modules used as an installation aid only, permanent adhesion is done with screws;
2. Single module as a unit can be cut accordingly.
3. The maximum quantity can be connected in one row is 40pcs.

Warranty

- * 3 years or 10,000 hours, whichever comes first.



LED Color	Color Temperature(K)	Beam Angle (°)	Luminous Flux (lm)	Working Voltage (VDC)	Power (W)	Dimension (mm)
Pure White	6000-6500	160	40-44	12	0.48	49*15.0*6.7
Warm White	3000-3300	160	40-44	12	0.48	49*15.0*6.7
Cool White	10000-12000	160	40-44	12	0.48	49*15.0*6.7

LED Color	Standard Qty per string	Storage Temp (°)	Working Temp (°)	Material	Max. qty in series (PCS)	Protection Rate
All	20	- 25~+60	- 20~+50	ABS+Aluminum	40	IP65