


GRAVEL ACCESS
(Scale 1:20)


- 80mm Block Pavers to BS EN 1338:2003
- 50mm Sharp sand to BS 7533-3 cat 11 of annex D
- Granular sub-base material type 1 to clause 803 table 8 / 2 MCHW Volume 1 Series 800. For thickness refer to Table 3 (on drawing)
- Natural ground.




BLOCK PAVING
(Scale 1:20)

CBR Values	Minimum thickness (mm) of sub-base (Consolidated in accordance with MCHW Volume I clause 801, table 8 / 1) Without geotextile		With geotextile underneath
Less than 2%	N/A		300
2-3%	325		225
3-5%	250		150
5-7%	150		N/A
7-20%	100		N/A


NOTE: Where capping is required material is to be Type 6F1/6F2.

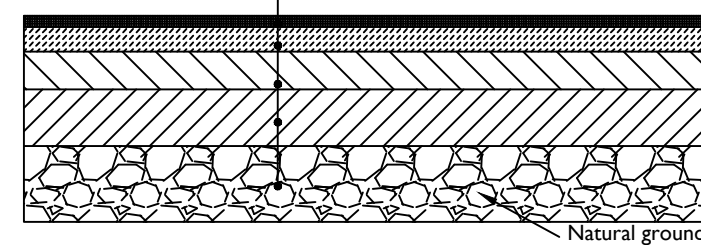

Note: NHBC CHAPTER 10.2, TABLE 2C, BITUMINOUS SHARED DRIVES WITH INFREQUENT USE BY COMMERCIAL VEHICLES

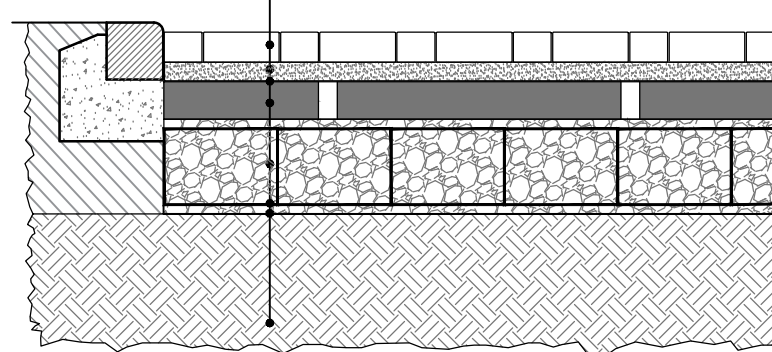


**PERMEABLE BLOCK PAVING WITH TREE ROOT
PROTECTION**
(Scale 1:20)

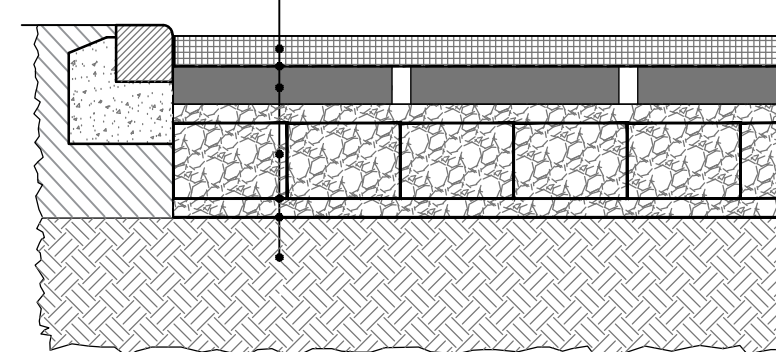


PERMEABLE TARMAC WITH TREE ROOT PROTECTION
(Scale 1:20)

TYPE:	HB2
SIZE:	125(w) x250(d)
COLOUR:	GREY
(Ω) UPSTAND:	100mm


KERB DETAIL

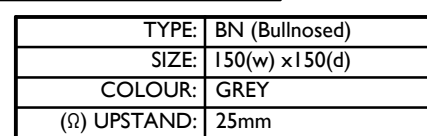

KERB DETAIL
(1:10)

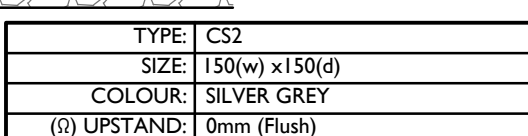

KERB DETAIL
(1:10)

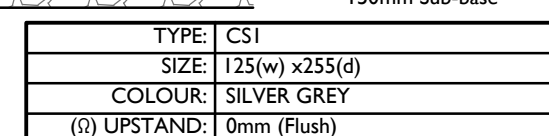

KERB DETAIL
(1:10)