



RECYFIX®PLUS 100

RECYFIX®PLUS 100, class D 400, Type 010 with ductile iron grating heelsafe, SW 6, black

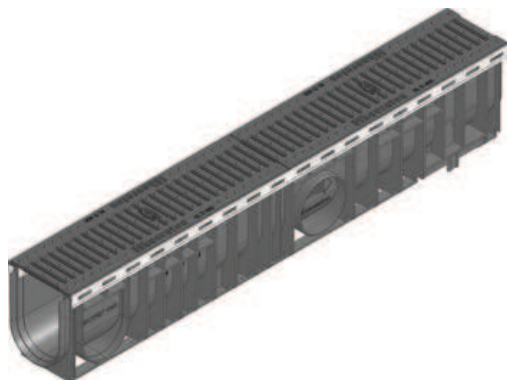

D 400

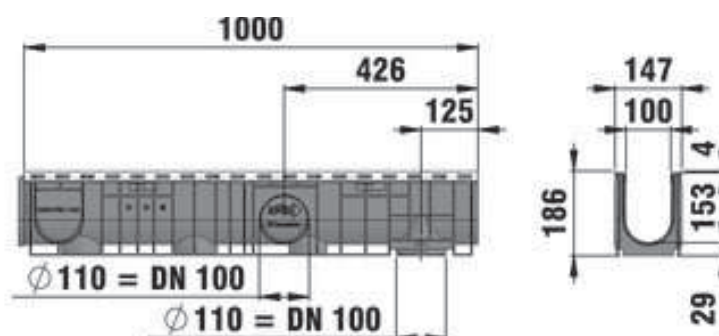

■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm ² /m	Drainage cross-section cm ²	Inlaying depth	Item-no.
1000	147	186	11,51	290	142	5	40391

■ Product description:

RECYFIX PLUS 100 Type 010 - Channel made of modified PP, with integrated metal profil for support of grating, according to EN 1433, with ductile iron grating, slot size 6 mm, and locking device, black, loading capacity from A 15 up to D 400, L/W/H 1000x147x186 mm, Item No. 40391

■ Material:

- **Channel body:** modified Polypropylene
- **Bolts:** Steel black galvanised
- **Locking handle:** RECYFIX Material (recycled PA)
- **Angle housing:** strip galvanized steel
- **Grating:** Ductile iron GJS 500-7

■ Type acc. DIN EN 1433:

M

■ Set of rules:

EN 1433

■ Application areas:

- Facade drainage
- Flat roofs, terraces and balconies
- Pedestrian zones
- Gardening and landscaping
- Market squares, markets
- Public areas and squares
- Car parking facilities
- Cityscapes with architectural value



- Cycle paths and footpaths
- School yards
- Access drives private