




MANHOLE SCHEDULE					Fall 1 in 40				
Fall 1 in 100					Fall 1 in 100				
SWMH	CL	IL	Depth		FWMH	CL	IL	Depth	
IC 01	8.85	8.40	450		MH 01	8.85	8.40	450	
IC 02	8.85	8.35	500		MH 02	8.85	8.15	700	
IC 03	8.85	8.25	600		MH 03	8.85	8.40	450	to existing
IC 04	9.00	8.14	860	to soak	ex. mh				
IC 04A	9.00	8.20	800		MH 05	9.20	8.75	450	
IC 05	9.20	8.75	450		MH 06	9.20	8.55	650	
IC 06	9.20	8.59	610	to soak	MH 07	9.20	8.43	770	
IC 07	9.20	8.75	450		MH 08	9.10	7.53	800	
IC 08	9.20	8.62	580		MH 09	9.20	7.40	995	
IC 09	9.20	8.45	750		MH 10	9.20	7.55	1250	
IC 10	9.10	8.35	750	to soak	MH 11	9.20	8.75	450	
IC 11	9.10	8.45	650	to soak	MH 12	9.20	8.72	480	
IC 12	9.15	8.70	450		MH 13	9.20	8.55	665	
IC 13	9.15	8.60	550	to soak	MH 14	9.20	8.52	695	
					MH 15	9.20	8.35	880	
					MH 16	9.20	8.18	1025	
					MH 17	9.10	8.65	450	
					MH 18	9.10	8.49	560	
					MH 19	9.10	8.29	760	
					MH 20	9.15	8.70	450	
					MH 21	9.15	7.87	1500	to existing

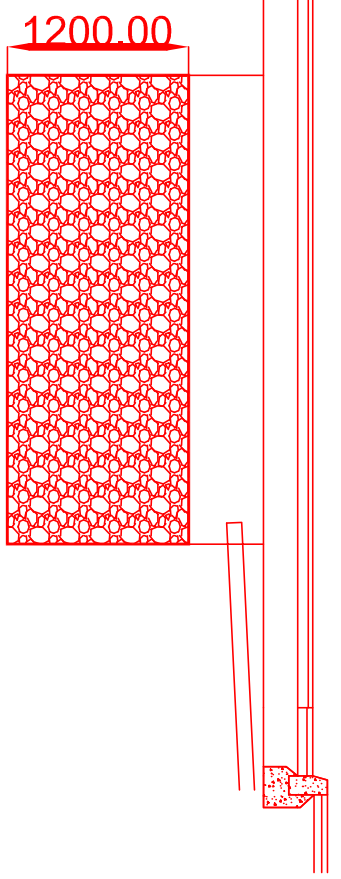

DRAINAGE DETAILS SUPERCEDED BY COWAN CONSULTANCY DRAWING NO. 414601.10P1