ELLESMERE

Robust wall sconce for HID and PL lamps.

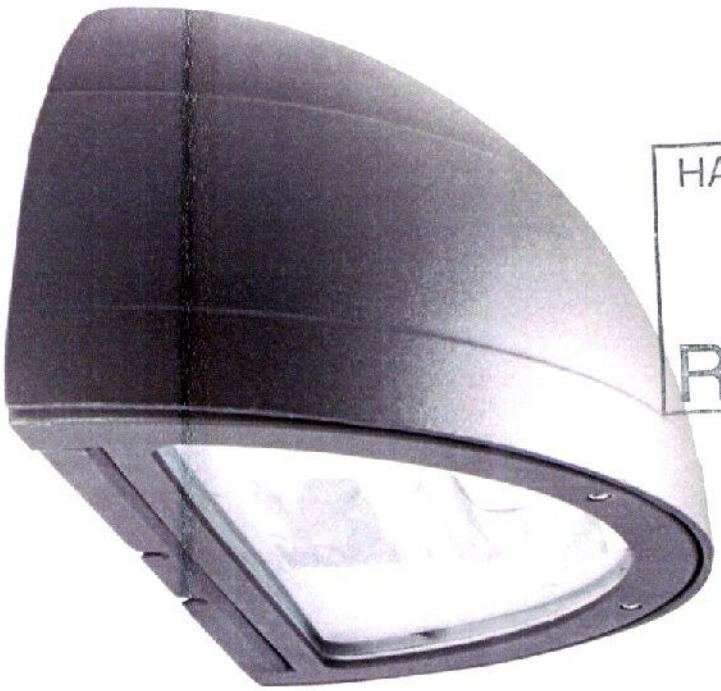

HAVANT BOROUGH COUNCIL
16 MAY 2016
RECEIVED

IP 65

APPLICATIONS

- Building perimeters
- Paths and pedestrian access areas

CONSTRUCTION

- Heavy duty die cast aluminium housing
- Dark bronze textured finish

SPECIFICATION

- 70W SON and HQI, 150W HQI with wide angle or forward throw (FT) reflector
- Twin lamp PL with HF gear and wide-angle reflector
- Single lamp PL with HF gear and forward throw (FT) reflector
- All variants supplied with premium brand lamps
  - 70W SON-E, colour 220
  - 70W and 150W HQI, colour 740
  - PL, colour 840

OPTIONS

- **Emergency.** Maintained 3 hours available on single lamp PL versions only. Add suffix M3.
- **Reflectors.** HID versions supplied with wide-angle reflector as listed, or for forward throw reflector add suffix FT. Single lamp PL supplied with forward throw reflector and twin lamp PL with wide-angle reflector.

ORDER CODE	DESCRIPTION
NEL70SON-HV/220	ELLESMERE 70W SON WALL SCONCE+220 LAMP
NEL70HQI-E/740	ELLESMERE 70W HQI WALL SCONCE+740 LAMP
NEL150HQI-E/740	ELLESMERE 150W HQI WALL SCONCE+740 LAMP
NEL2x26/PL-HF/840	ELLESMERE 2X26W PL-HF WALL SCONCE+840 LAMP
NEL2x32/PL/HF/840	ELLESMERE 2X32W PL HF WALL SCONCE+840 LAMP
NEL2x42/PL-HF/840	ELLESMERE 2X42W PL-HF WALL SCONCE+840 LAMP
NEL26/PL/HF/FT/840	ELLESMERE 1X26W PL-HF WALL SCONCE FRO THROW+840 LAMP
NEL32/PL-HF/FT/840	ELLESMERE 1X32W PL-HF WALL SCONCE FRO THROW+840 LAMP
NEL42/PL-HF/FT/840	ELLESMERE 1X42W PL HF WALL SCONCE FRO THROW+840 LAMP

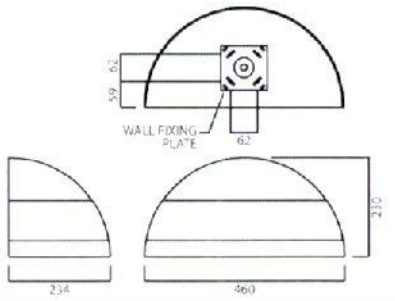

REBUS

IP65 rated LED bollard.

HAVANT BOROUGH COUNCIL
16 MAY 2016
RECEIVED

APPLICATIONS

- Paths
- Car parks
- Urban amenity areas

CONSTRUCTION

- Heavy gauge extruded aluminium body
- Domed head

OPTIONS

- **Mounting kit.** J bolt or root mounting kits to be ordered as separate items.

SPECIFICATION

- CRI >7
- CCT 4,000K
- Cree LEDs
- Leading brand driver

ORDER CODE	DESCRIPTION
NRB25/LED/BK/740	REBUS 25W LED IM BOLLARD BLACK DOME TOP

ACCESSORIES

ORDER CODE	DESCRIPTION
NHD/BOLTKIT/12	HUDSON/RANKIN/REBUS J BOLT KIT 12"
NHD/RMK1	HUDSON/RANKIN/REBUS ROOT MOUNT NC KIT

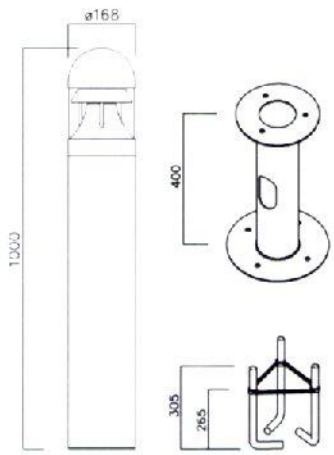

HAVANT BOROUGH COUNCIL
16 MAY 2016
RECEIVED

JACKSVILLE

IP65 circular LED fitting with a choice of covers

IP65 LED IK10

APPLICATIONS

- Patios and porches
- Communal and circulation areas

SPECIFICATION

- 168 LEDs on metal core PCB
- 825 lumens, 13W, 63 lm/c W
- CRI >8
- CCT 5,000K

CONSTRUCTION

- Polycarbonate base and diffuser
- Extremely robust construction and even light distribution
- Supplied complete with your choice of any 1 of 4 decorative covers. Covers are available singly from wholesalers, and are distributed to them in packs of 12.

OPTIONS

- **Emergency.** Maintained 3 hours available. Suffix M3
- **Sensors.** Micro-wave occupancy sensor available. Suffix MW
- **Corridor function.** Dim-to-10% available. Suffix CF

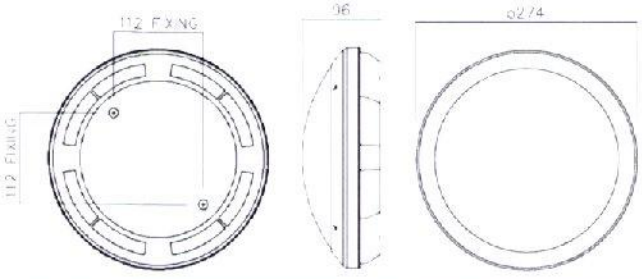

ORDER CODE	DESCRIPTION
NJA/BASE/13/LED/850	JACKSVILLE BASE 13W LED IP65
NJA/BASE/13/LED/M3/850	JACKSVILLE BASE 13W LED IP65 +M3
NJA/BASE/13/LED/MW/850	JACKSVILLE BASE 13W LED IP65 +MW
NJA/BASE/13/LED/CF/850	JACKSVILLE BASE 13W LED IP65 +CF
NJA/BASE/13/LED/CFMW/850	JACKSVILLE BASE 13W LED IP65 +CF+MW
NJA/COVER/2213/BK	JACKSVILLE COV STANDARD 2213 PK 12
NJA/COVER/2214/BK	JACKSVILLE COV CROSS HALF MOON 2214 PK 12
NJA/COVER/2215/BK	JACKSVILLE COV HALF MOON 2215 PK 12
NJA/COVER/2217/BK	JACKSVILLE COV CENTRE BAND SLOTTED 2217 PK 12
NJA/COVER/ASSORT4/BK	JACKSVILLE COV ASSORTMENT A 3X 4 TYPES