
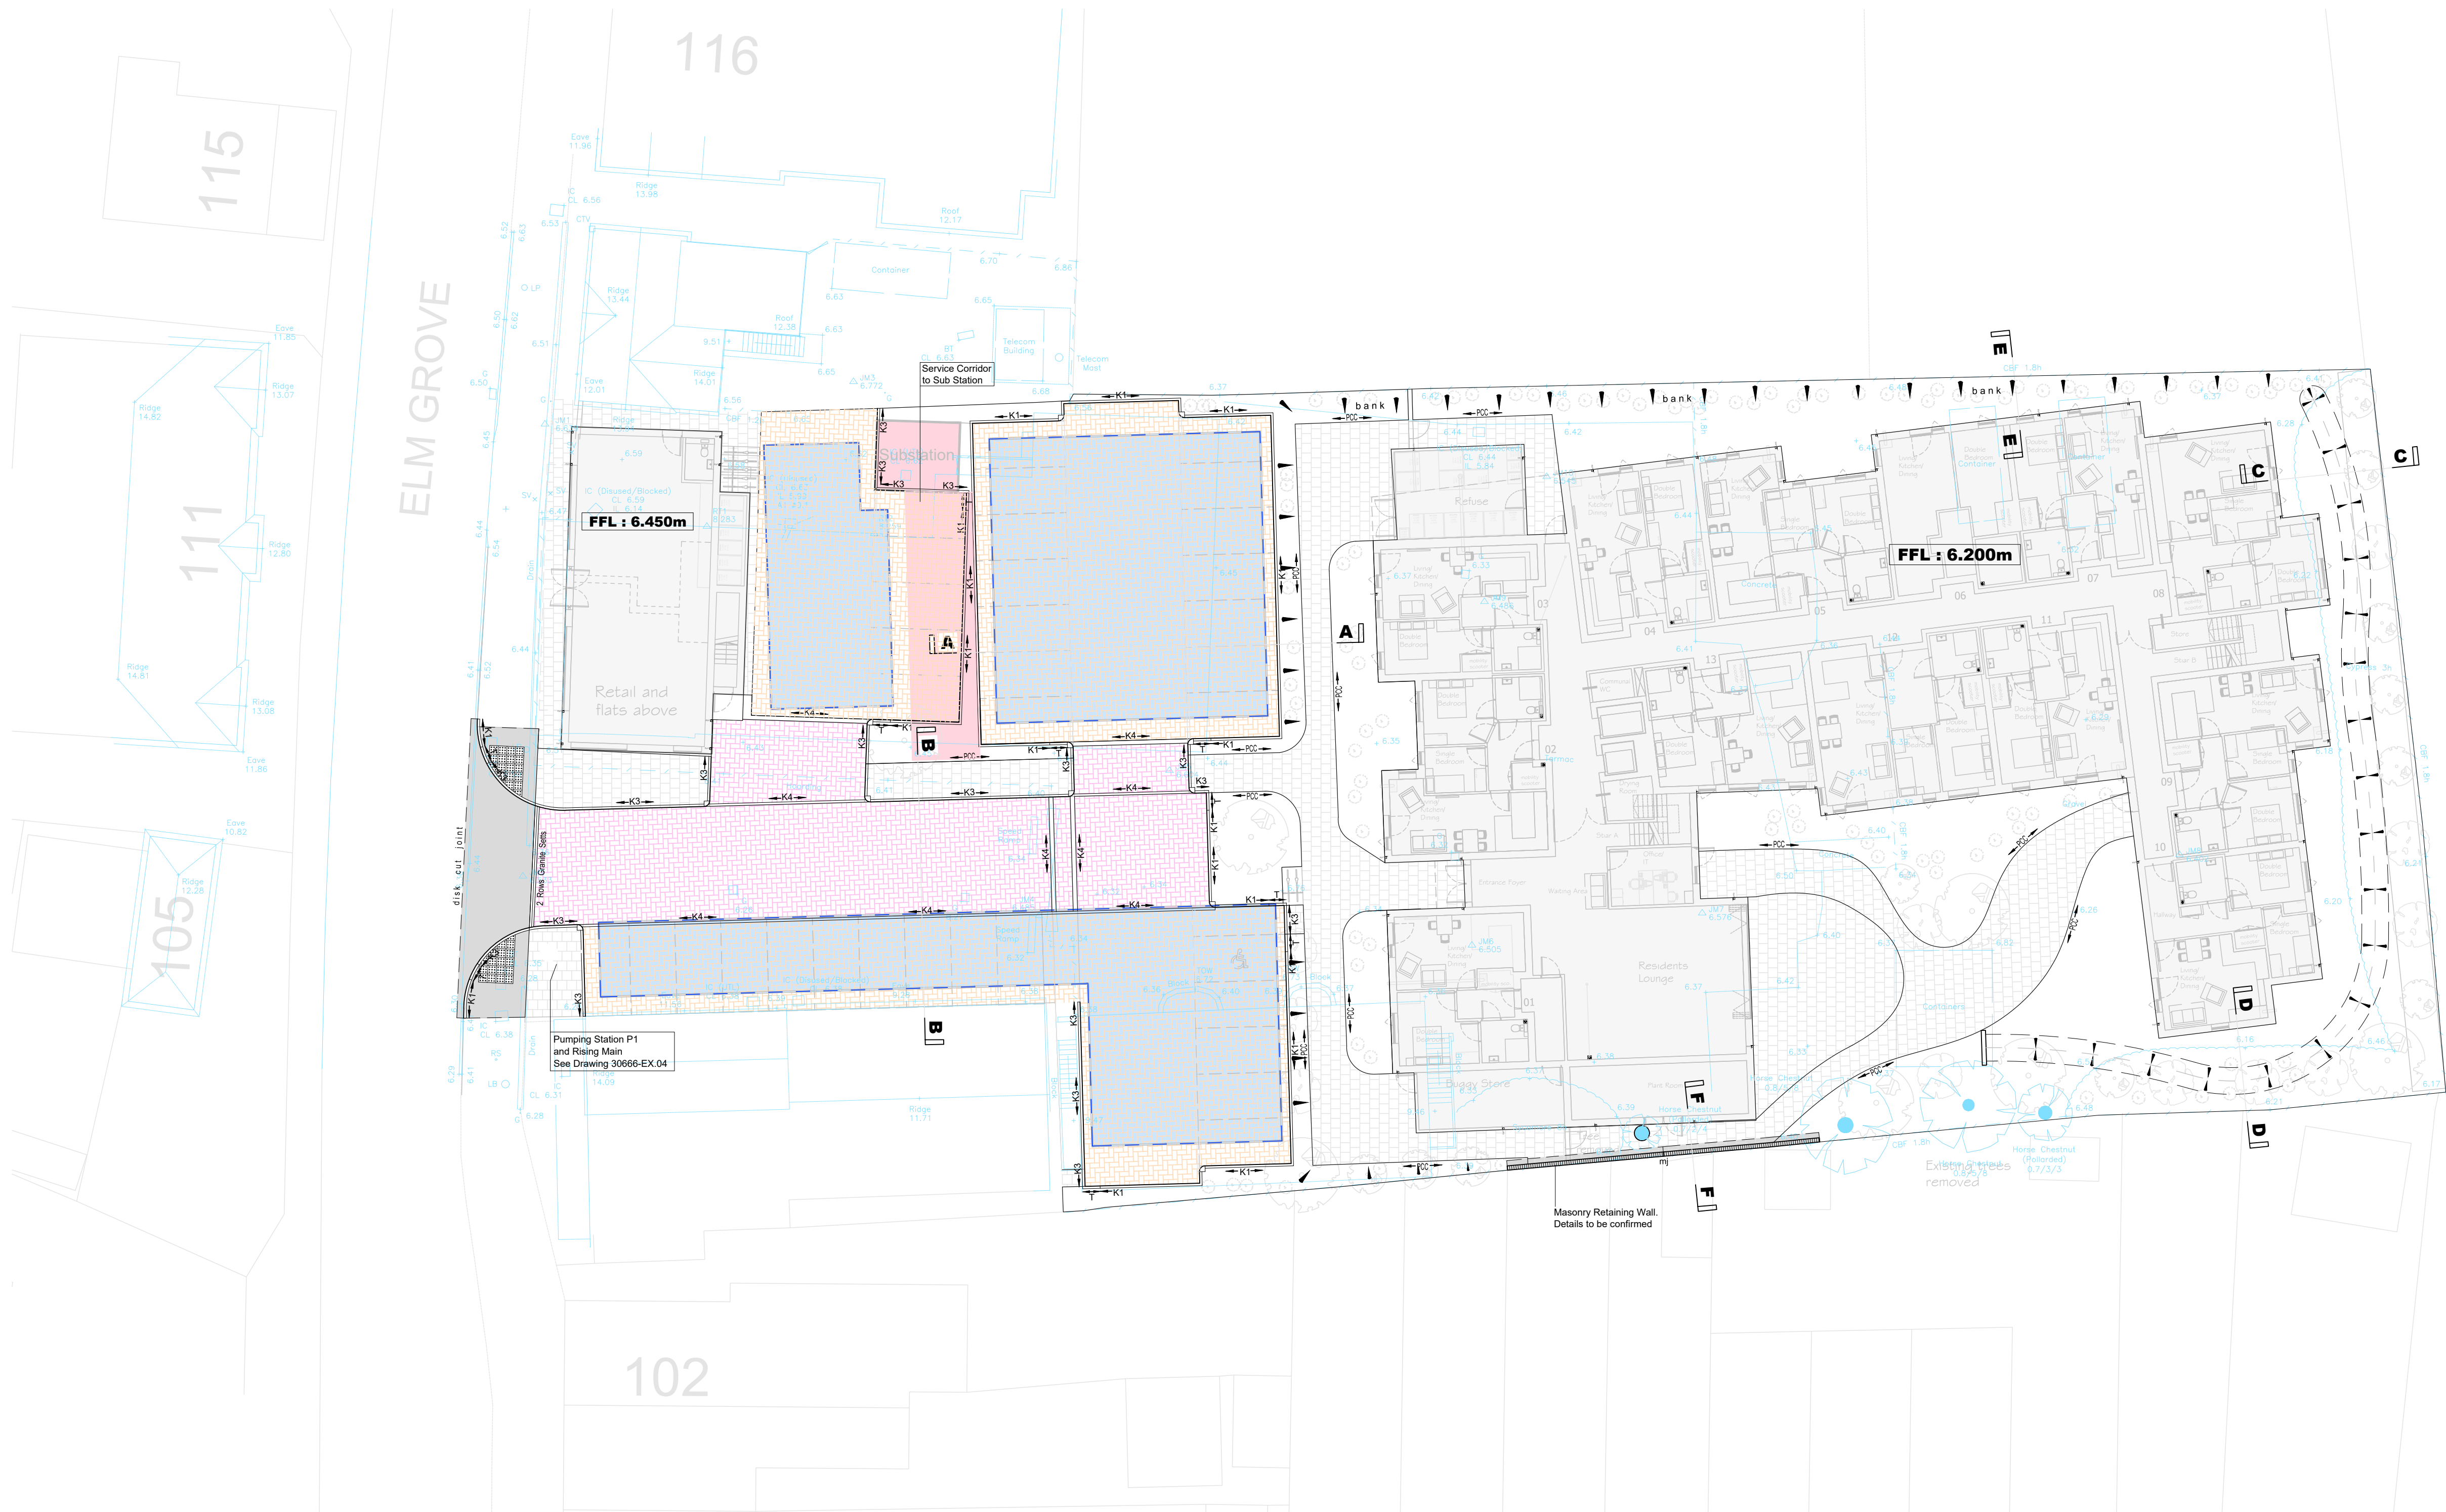




NOTES

- This drawing to be read in conjunction with all relevant Architects and Engineers drawings and specifications.
- Dimensions are in millimetres unless noted otherwise.
- Original topographic survey undertaken by 3D Services Limited.
For full topographic survey information see drawing 19/088/01 by 3D Services.
All levels based on O.S. by G.P.S.
- Existing levels shown thus: $+5.775$
- Before excavation commences, the Contractor shall ascertain the depths, sizes and locations of all services to be crossed. Any conflicts in levels between new works and existing services shall be notified to the Engineer.
- Kerb types are shown thus :
 - $\rightarrow$ K1 - 115mm Face Kerb (See STD.02.25)
 - $\rightarrow$ K3 - 6mm / 25mm Drapped Kerb (See STD.02.25)
 - $\rightarrow$ K4 - Flush Kerb (See STD.02.25)
 - $\rightarrow$ T - Transition Kerb (See drawings STD.02.25)
 - $\rightarrow$ K5 - Precast Concrete Edging 50 x 150mm EF
- Finishes Schedule :

All formations shall be inspected and any soft or deleterious material shall be excavated and replaced with well compacted Class 6F4 / 6F5 material. The resultant formation shall be proof rolled. Recycled sub-base and capping materials in accordance with The Specification for Highway Works shall be acceptable.

PERMEABLE PAVING OVER ATTENUATION TANK
Construction : 80mm Formpave Aquaflo Concrete Blocks, or equivalent
Herringbone Bond (Block Type to be confirmed)
40mm of 6mm Nominal Sized Basalt Aggregate, or Equivalent
- Terram 1000 Geotextile, or equivalent
330mm Type 3 Permeable Sub - Base
- Triax Tx160 Geogrid by Tensar, or equivalent
570mm Class 6F5 Capping
- Terram 1000 Geotextile, or equivalent
450mm Charcon Permavoid (150) Modular Cells
- 2000 gauge Visqueen waterproof sheet lapped and sealed to prevent water passage
200mm C40 reinforced concrete base incorporating A142 mesh
- 1000 gauge polythene sheet

PERMEABLE BLOCK PAVING
Construction : 80mm Formpave Aquaflo Concrete Blocks, or equivalent
Herringbone Bond (Block Type to be confirmed)
40mm of 6mm Nominal Sized Basalt Aggregate, or Equivalent
- Terram 1000 Geotextile, or equivalent
330mm Type 3 Permeable Sub - Base
- Triax Tx160 Geogrid by Tensar, or equivalent
450mm Total

BLOCK PAVED ACCESS ROAD
Construction : 80mm Concrete Block Pavers
(Bond & block type to be confirmed)
40mm Sharp Sand Base
- Terram 1000 Geotextile, or equivalent
330mm Type 1 Sub - Base
- Triax Tx160 Geogrid by Tensar, or equivalent
450mm Total

ADOPTED HIGHWAY
Construction : To Hampshire County Council specification

FOOTWAYS
Construction : See drawing STD.02.35
over, 6F5 capping fill as required

P2 REDRAWN WITH FINISHED FLOOR LEVEL = 6.200m. PF-29-05-20

REV	DESCRIPTION	CHECKED	DATE
-----	-------------	---------	------

Archibald Shaw

Consulting Civil & Structural Engineers
One Little London Chichester West Sussex PO19 1PP
Telephone: 01243 786471 www.archibaldshaw.co.uk

CLIENT
Hamlet Homes

PROJECT

Elm Grove

Hayling Island

Surfacing

DRAWN BY	CHECKED BY	DESIGNED BY
----------	------------	-------------

PF	VC	VC/PF
----	----	-------

SCALE @ A1	© DATE	STATUS
------------	--------	--------

1:200	May, 2020	Planning
-------	-----------	----------

JOB NO.	DRAWING NO.	REVISION
---------	-------------	----------

30666	EX.02	P2
-------	-------	----