

Opening Schedule

14/05/2024 10:13:10

PR/E/74610/R0/A

Original Pricing



02/11

2x Splay Timbers - Gloss Front Edge

Ground Floor Flat 2

GW.2.01 Treatment F2/A

Unit 2x Series 20: Counterbalanced Vertical Slider / 4mm T Glass
Unit 1x Series 20: Counterbalanced Vertical Slider / 4mm T Glass
1x SW Painted SW 68 x 32
2x Splay Timbers - Gloss Front Edge
2x Aluminium Transom / Mullion - Standard

GW.2.02 Treatment F2/B

Unit 1x Series 20: Counterbalanced Vertical Slider - Box / 4mm T Glass
1x SW Painted SW 68 x 32
2x Splay Timbers - Gloss Front Edge

GW.2.03 Treatment F2/C Extra-over Door

Unit 1x Series 10: 2-pane Horizontal Slider - HD / 6mmT Glass
Unit 1x Series 46: Casement fixed Light / 4mm T Glass
1x Aluminium Transom / Mullion - Standard
2x Splay Timbers - Gloss Front Edge

First Floor Flat 5

1W.5.01 Treatment F5/A

Unit 1x Series 20: Counterbalanced Vertical Slider - Box / 4mm T Glass
2x Splay Timbers - Gloss Front Edge
1x SW Painted 100 x 32 - Ovolo corner

1W.5.02 Treatment F5/A

Unit 1x Series 20: Counterbalanced Vertical Slider - Box / 4mm T Glass
1x SW Painted 100 x 32 - Ovolo corner
2x Splay Timbers - Gloss Front Edge

1W.5.03 Treatment F5/B

Unit 1x Series 10: 2-pane Horizontal Slider / 4mm T Glass

1W.5.04 Treatment F5/B

Unit 1x Series 10: 2-pane Horizontal Slider / 4mm T Glass

1W.5.05 Treatment F5/B

Unit 1x Series 10: 2-pane Horizontal Slider / 4mm T Glass

1W.5.06 Treatment F5/C

Unit 1x Series 20: Counterbalanced Vertical Slider / 4mm T Glass

1W.5.07 Treatment F5/D

Unit 1x Series 20: Counterbalanced Vertical Slider / 4mm T Glass
2x Splay Timbers - Gloss Front Edge

Second Floor Flat 7

2W.7.01 Treatment F7/A

Unit 1x Series 20: Counterbalanced Vertical Slider - Box / 4mm T Glass
2x SW Painted 44mm x 44mm max

2W.7.02 Treatment F7/B

Unit 1x Series 20: Counterbalanced Vertical Slider - Box / 4mm T Glass

Opening Schedule

14/05/2024 10:13:10

PR/E/74610/R0/A

selectaglaze
Secondary Glazing

Original Pricing


FLAT 7 - CONT:

0/0


2W.7.03	Treatment F7/C
Unit 1x	Series 20: Counterbalanced Vertical Slider / 4mm T Glass
2W.7.04	Treatment F7/C
Unit 1x	Series 20: Counterbalanced Vertical Slider / 4mm T Glass
2W.7.05	Treatment F7/D
Unit 1x	Series 20: Counterbalanced Vertical Slider / 4mm T Glass
2W.7.06	Treatment F7/E
Unit 1x	Series 20: Counterbalanced Vertical Slider / 4mm T Glass
2W.7.07	Treatment F7/F
Unit 1x	Series 20: Counterbalanced Vertical Slider / 4mm T Glass

Second Floor Flat 8


2W.8.01	Treatment F8/A
Unit 1x	Series 20: Counterbalanced Vertical Slider / 4mm T Glass
2W.8.02	Treatment F8/B
Unit 1x	Series 20: Counterbalanced Vertical Slider / 4mm T Glass
2W.8.03	Treatment F8/C
Unit 1x	Series 20: Counterbalanced Vertical Slider - Box / 4mm T Glass
2x	SW Painted 44mm x 44mm max
2W.8.04	Treatment F8/C
Unit 1x	Series 20: Counterbalanced Vertical Slider - Box / 4mm T Glass
2x	SW Painted 44mm x 44mm max
2W.8.05	Treatment F8/D
Unit 1x	Series 20: Counterbalanced Vertical Slider / 4mm T Glass
2W.8.06	Treatment F8/E
Unit 1x	Series 20: Counterbalanced Vertical Slider - Box / 4mm T Glass
2x	SW Painted 44mm x 44mm max
2W.8.07	Treatment F8/E
Unit 1x	Series 20: Counterbalanced Vertical Slider - Box / 4mm T Glass
2x	SW Painted 44mm x 44mm max

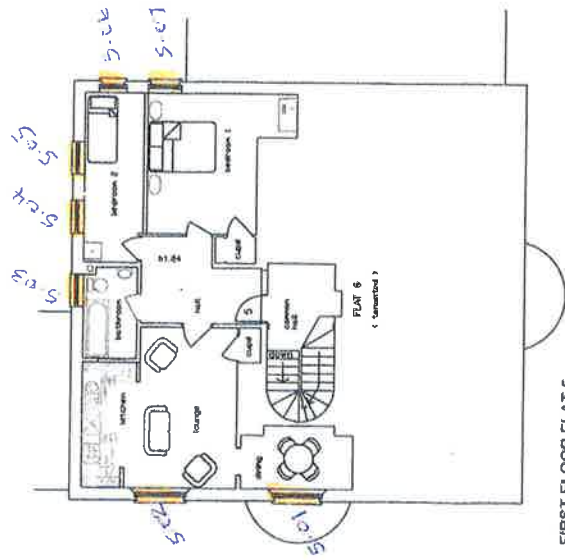


FIRST FLOOR FLAT 5

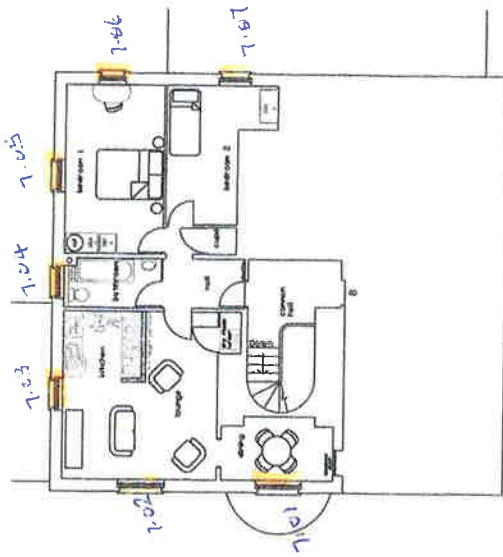


SECOND FLOOR FLAT 7

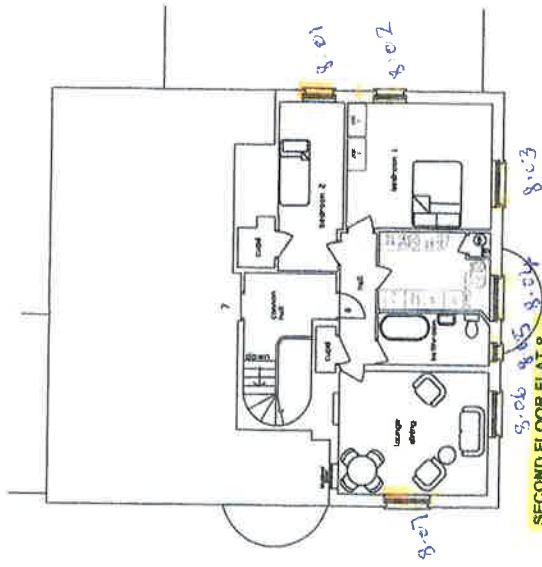


SECOND FLOOR FLAT 8

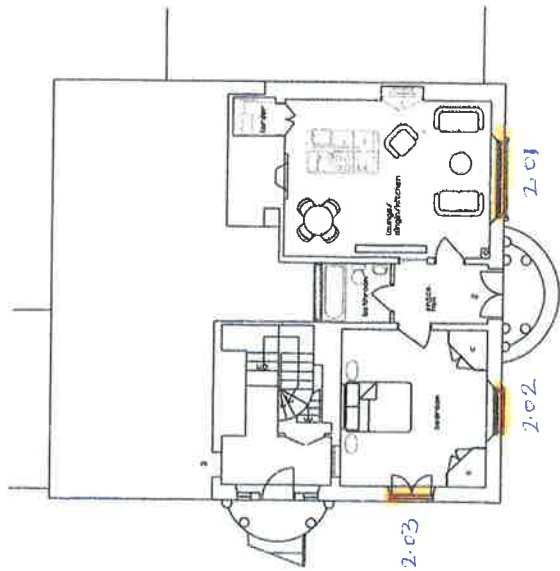

GROUND FLOOR FLAT 2

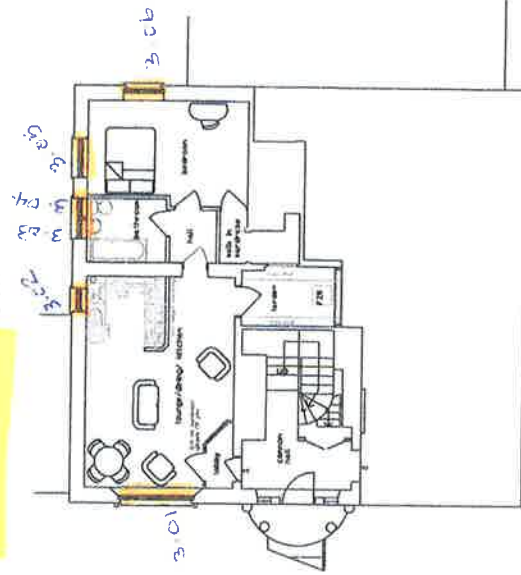

GROUND FLOOR FLAT 3

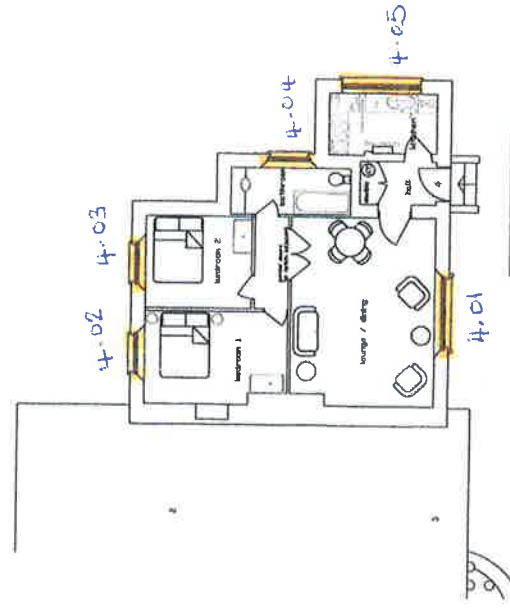


GROUND FLOOR FLAT 4

PROJECT NAME	PARADISE HOUSE LONDON ROAD WATERLOO LANE POT 5/1
DATE	20/01/2021
SCALE	1:100
BY	SK 21011.2
CHECKED BY	
DATE	
REVISION	
DATE	
REVISION	

SK 21011.2



A slim section vertical sliding unit suitable for treating traditional sash windows. Spring balances fully support the sliding sashes in all positions.

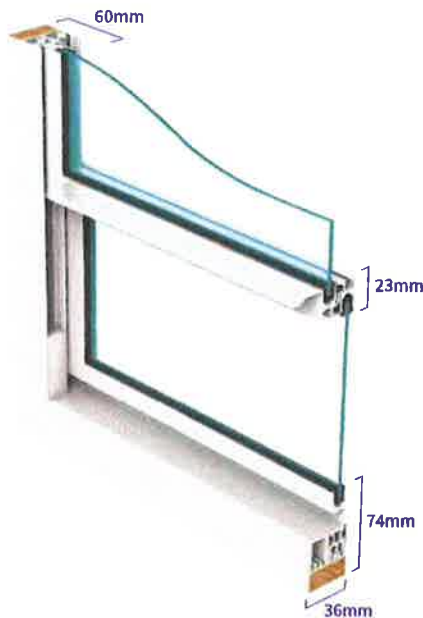

FEATURES

- Recessed finger pull on lower sash allows contra-sliding to assist with cleaning
- 23mm interlock stile with projecting finger pull
- Twin brush seals ensure high sealing efficiency
- Fixings concealed within the frame - trims not required
- Frames may be linked with a colour matched aluminium transom/mullion section

DIMENSIONS

Recommended maximum frame

Format	Height (mm)	Width (mm)
2 PANES	3000	1400

Maximum sash (h)1500mm x (w)1400mm, minimum sash (h)300mm x (w)350mm

Overall dimensions are subject to a maximum sash weight of 20kg

Sash height to width ratio should not normally exceed 1:3

A minimum frame to frame gap of 75mm is recommended for access to the outer window

FRAME COLOUR

Stock finish is white HIPCA 9910 semi-gloss

Any standard powder paint, wood grain finish or anodised finish to order

OPTIONS

Glazing	4mm to 6.8mm
Frames	Heavy duty box interlock stile Curved heads - minimum radius 450mm
Ironmongery (see page 44/45)	H3 Recessed finger pull to upper sash H17 Cranked 'D' handle to upper sash L2 Lockable fitch catch L4 Plunge lock L13 Sliding latch