




SERIES 10 SLIMLINE

HORIZONTAL SLIDING

A slim and versatile horizontal sliding system that provides easy access to the external window for ventilation.

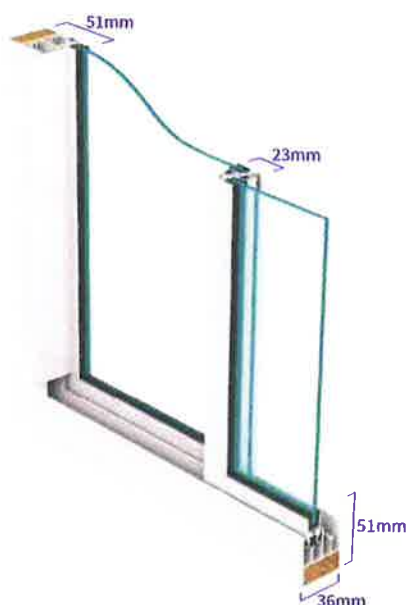

FEATURES

- Available with 2, 3 or 4 sliding sashes (panels)
- Sashes slide on glide pads (ref R1)
- Full height, integral projecting handle (ref H1)
- 23mm wide interlock stile
- Twin brush seals ensure high sealing efficiency
- Fixings concealed within the frame – trims not required
- Sashes are removable for maintenance and cleaning
- Frames may be linked with a colour matched aluminium transom/mullion section

DIMENSIONS

Recommended maximum frame

Format	Height (mm)	Width (mm)
2 PANES	2200	2800
3 PANES	2200	4200
4 PANES	2200	4900

Maximum sash (h)2200mm x (w)1400mm, minimum sash (h)350mm x (w)250mm

Overall dimensions are subject to a maximum sash weight of 40kg and a risk assessment covering window location and type of end user

Sash height to width ratio should not normally exceed 4:1

FRAME COLOUR

Stock finish is white HIPCA 9910 semi-gloss

Any standard powder paint, wood grain finish or anodised finish to order

OPTIONS

Glazing	4mm to 6.8mm
Frames	Heavy duty interlock stile Heavy duty box interlock stile Low profile running track to clear inward opening windows (ref F2) Triple track allowing 3 sashes to stack at one end (ref F3) Curved jambs- minimum radius 450mm
Hardware	R2 Medium duty ball-race with nylon tyre
Ironmongery (see page 44/45)	H3 Recessed finger pull for contra-sliding L1 Shoot-bolt L2 Lockable fitch catch L4 Plunge lock L13 Sliding latch L28 'U' channel track restrictor