Cycle Shelters Specification Sheet

Wardale® Cycle Shelter
BXMW/WAR

broxap®
cycle parking & storage

Standard Unit Dimensions:

Width: 2140mm
Height: 2150mm

Length with Capacities:

2000mm (4 Cycles)
3600mm (8 Cycles)
4100mm (10 Cycles)
5000mm (12 Cycles)
6000mm (14 Cycles)

Colours/Finishes:

Galvanised Only	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	RAL 3020 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	RAL 1023 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White

The colours shown are a guide only. Please check a colour chart to see the actual colour.

Product Information

The Wardale® cycle shelter is our best selling and most versatile shelter. With its modular design the Wardale cycle shelter can be linked together to create banks of shelters which allow to you accommodate almost any quantity of cycles. The Wardale can also be fitted with Swinging or Sliding gates with a range of locking mechanisms available to create a fully lockable and secure shelter.

Features

- Polycarbonate End Panels Included
- Robust modular construction featuring load bearing purlins
- Welded end frames and purlin section made from heavy-duty box section assembled with anti-tamper high strength bolts
- Anti-climb end frames
- Adjustable baseplates
- Bottom purlin provides anti-crawl bar on level surface
- Hot dipped galvanized to BS EN ISO 1461:2009
- 4mm Clear View PETg UV Roof and Side Cladding (5mm also available)
- Breeam Compliant Configurations

Materials Used

- Framework - Mild Steel
- Cladding - 4 mm PETG uv
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD **T:** 01782 564411 **E:** info@broxap.com **W:** www.broxap.com

BUILDER'S PROFILE
bsi ISO 9001 Quality Management Systems CERTIFIED ISO 14001 Environmental Management CERTIFIED ISO 45001 Occupational Health and Safety Management CERTIFIED
ROSPA Member
Constructionline
CHAS
BREEAM
SafeContractor
Achilles BuildingConfidence Advanced Member

All dimensions are in millimeters, weights in kilograms and capacities in litres, are approximate and do not form any part of the contract. All prices are guide prices only and should be used for estimating purposes only. Broxap Limited reserve the right to change the design, specification or price of any item sold at any time. All prices exclude VAT and delivery. Please Note: All information on this data sheet is subject to orientation (N,S,E,W) altitude and proximity to buildings, but is sufficient for use as general/preliminary information).

Cycle Shelters Specification Sheet

Wardale® Cycle Shelter
BXMW/WAR

broxap® cycle parking & storage

Finish Options

- Galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Power Coated

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to '1Y' for BS 476

Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

**Maintenance and other qualifying criteria apply*

Options

- Steel profile, trapezoidal roof cladding
- Opal Cladding to Roof and Sides
- Extended adjustable baseplates for submerged fixing
- Swinging Security Gates
- Sliding Security Gates
- Mechanical or Keyed Locks
- Further anti crawl bars can be fitted dependent on surface level
- Helmet Lockers
- Powder Coating to a wide range of colours
- LED or solar lighting
- Full Installation Service

Standard Unit Dimensions:

Width: 2140mm
Height: 2150mm

Length with Capacities:

2000mm (4 Cycles)
3600mm (8 Cycles)
4100mm (10 Cycles)
5000mm (12 Cycles)
6000mm (14 Cycles)

Colours/Finishes:

Galvanised Only	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	RAL 3020 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	RAL 1023 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White

The colours shown are a guide only. Please check a colour chart to see the actual colour.

Diagram

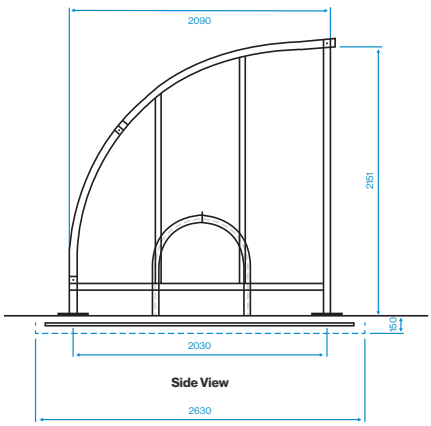

Side View

Installation

Surface Mounted Baseplate



Submerged Baseplate



Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

BUILDER'S PROFILE · bsi ISO 9001 ISO 14001 ISO 45001 · ROSPA Member · Constructionline · CHAS · BREEAM · SafeContractor · Achilles BuildingConfidence Advanced Member

All dimensions are in millimeters, weights in kilograms and capacities in litres, are approximate and do not form any part of the contract. All prices are guide prices only and should be used for estimating purposes only. Broxap Limited reserve the right to change the design, specification or price of any item sold at any time. All prices exclude VAT and delivery. Please Note: All information on this data sheet is subject to orientation (N,S,E,W) altitude and proximity to buildings, but is sufficient for use as general/preliminary information).