




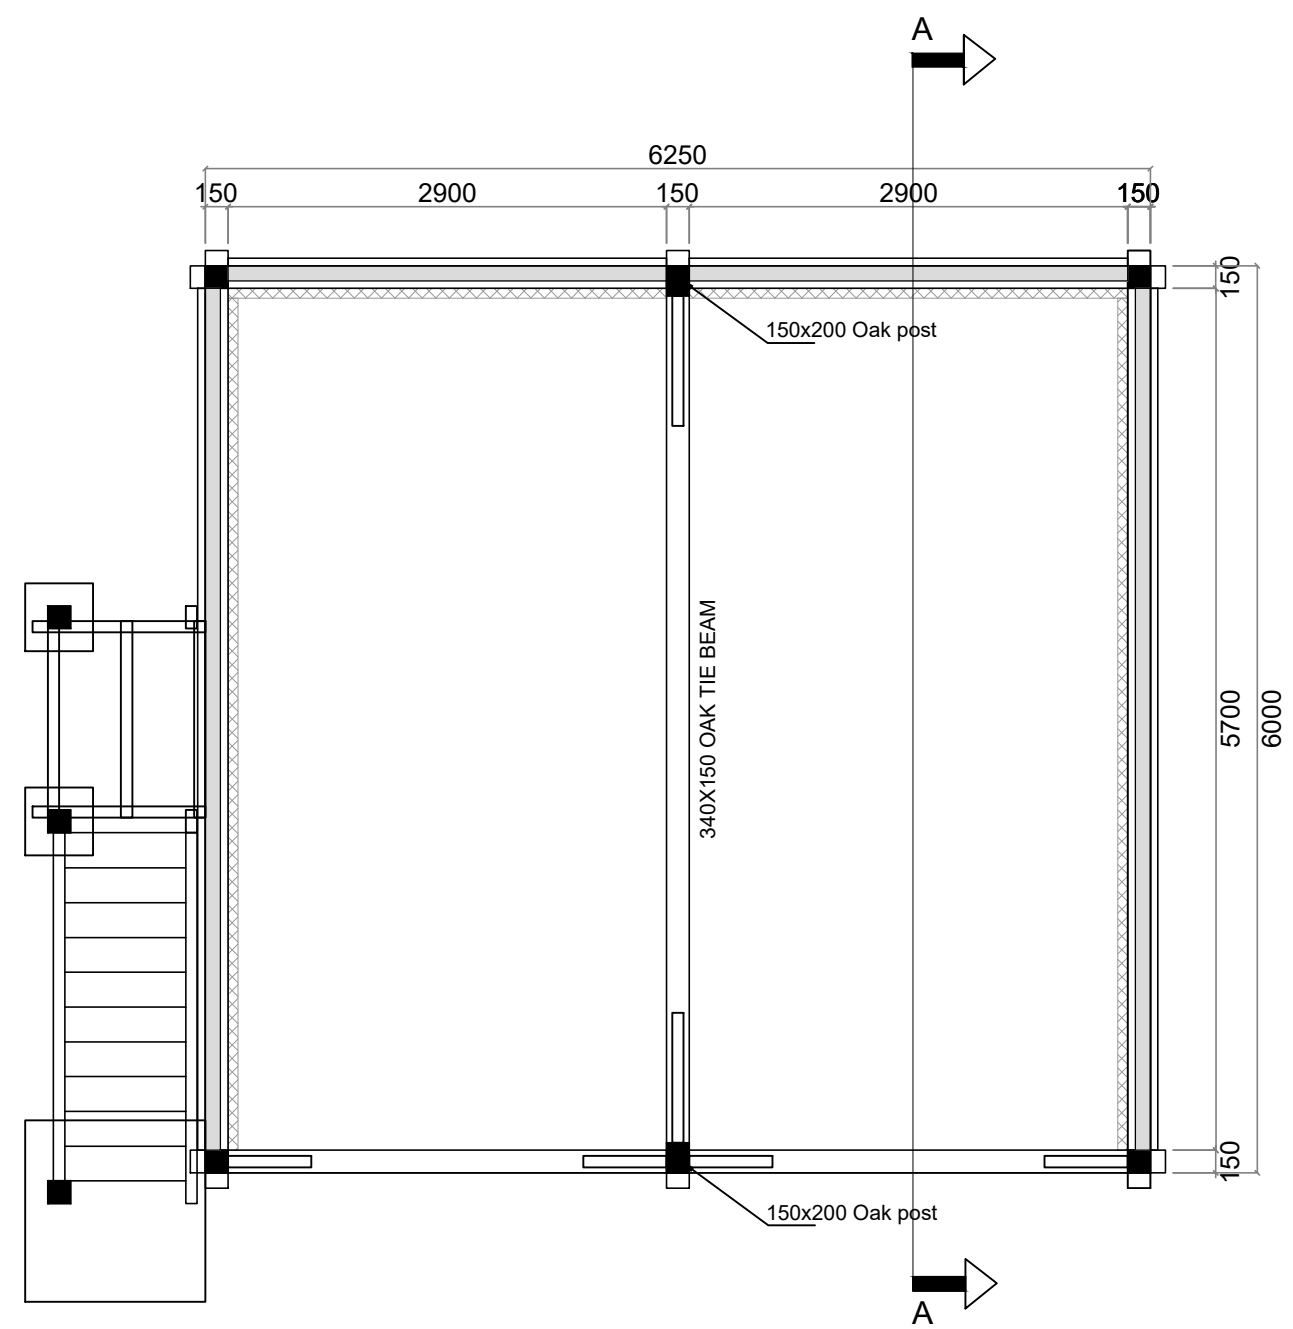

FRAME PLAN

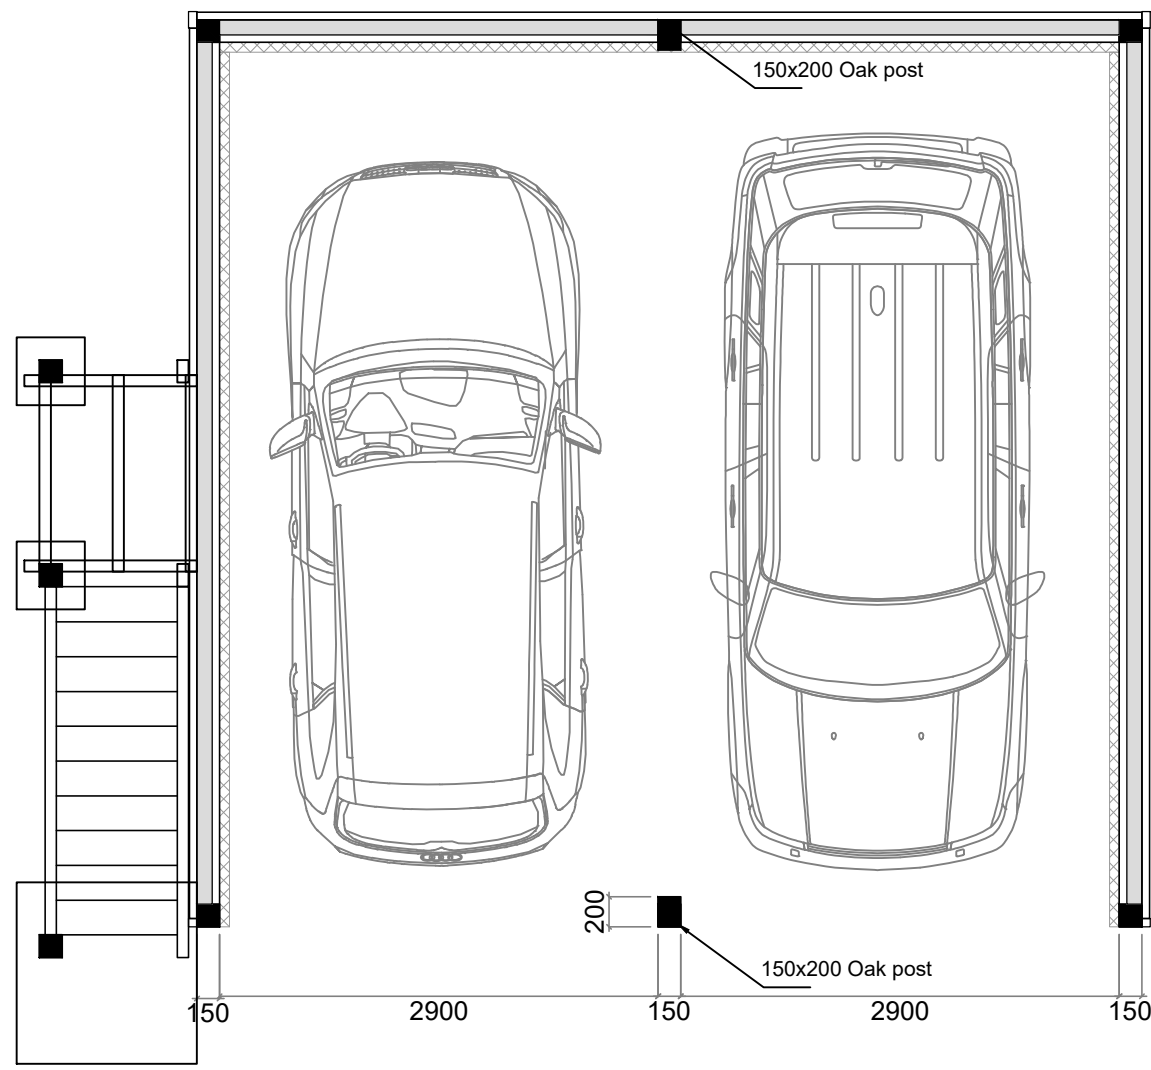


FLOOR PLAN

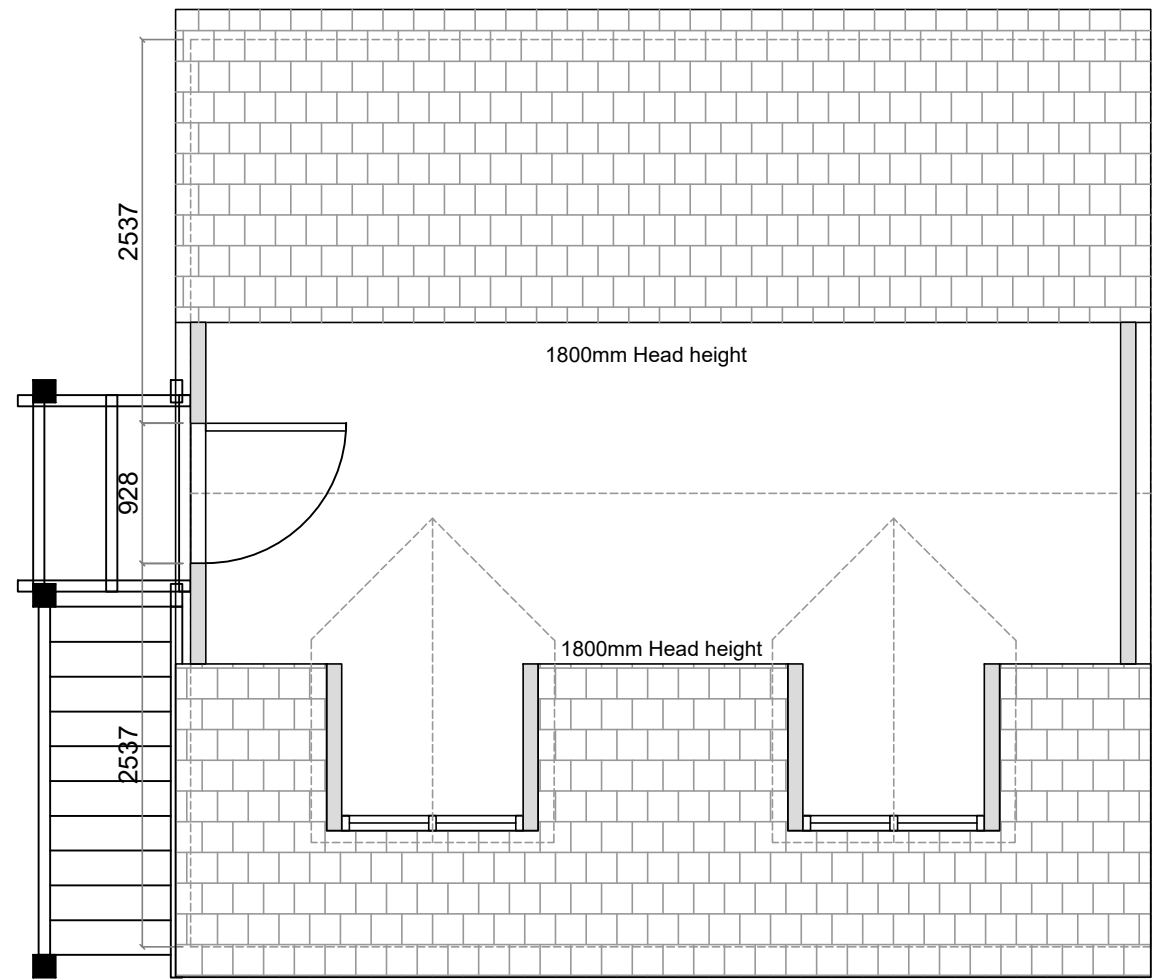


ROOF PLAN




LEFT ELEVATION

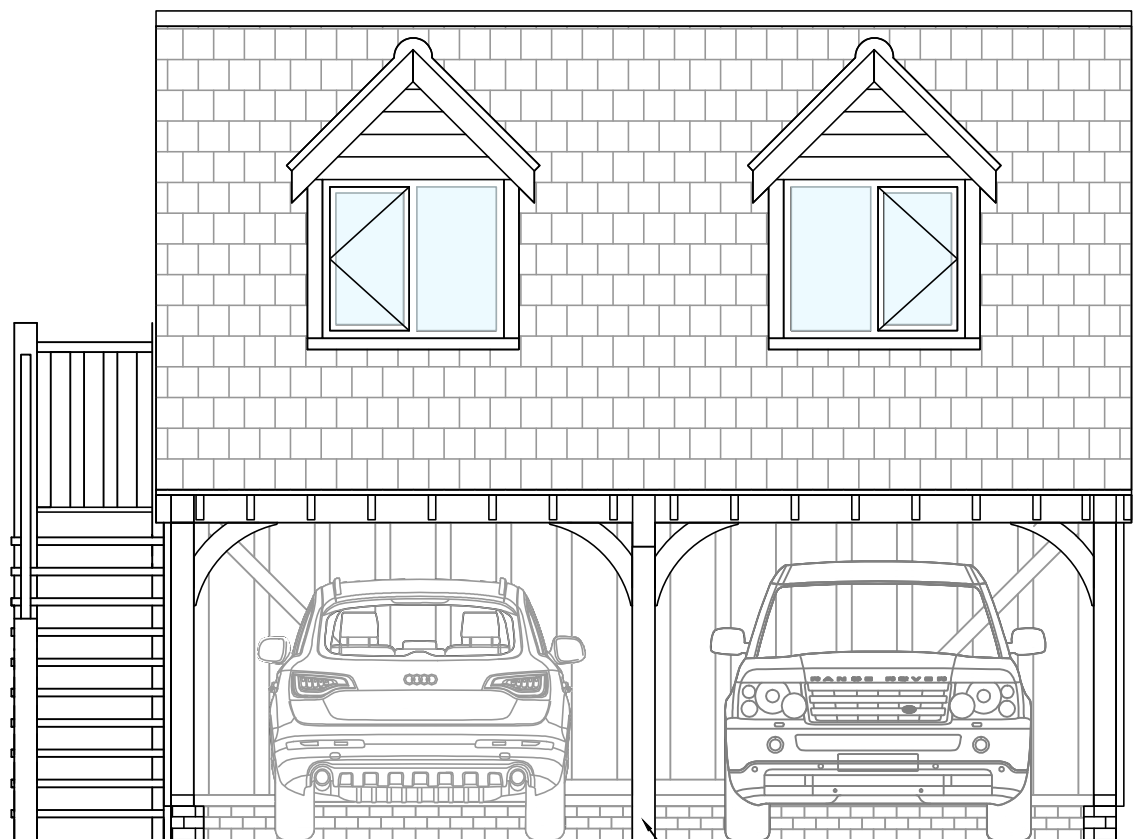

FRONT ELEVATION


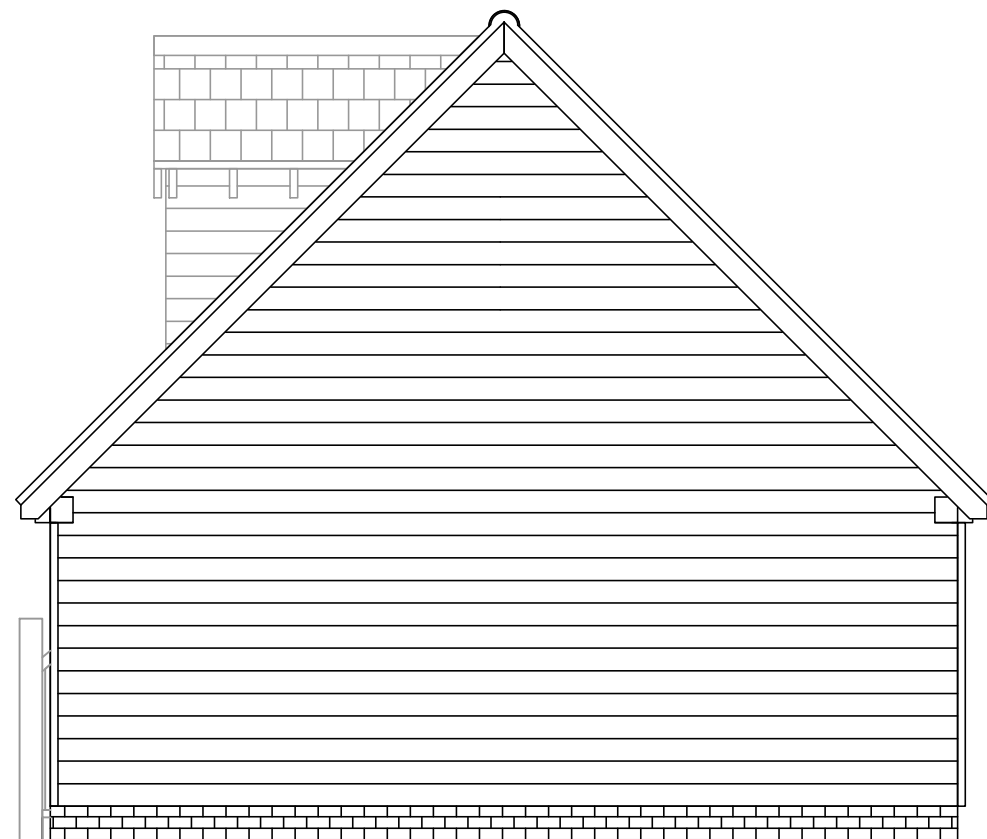


RIGHT ELEVATION

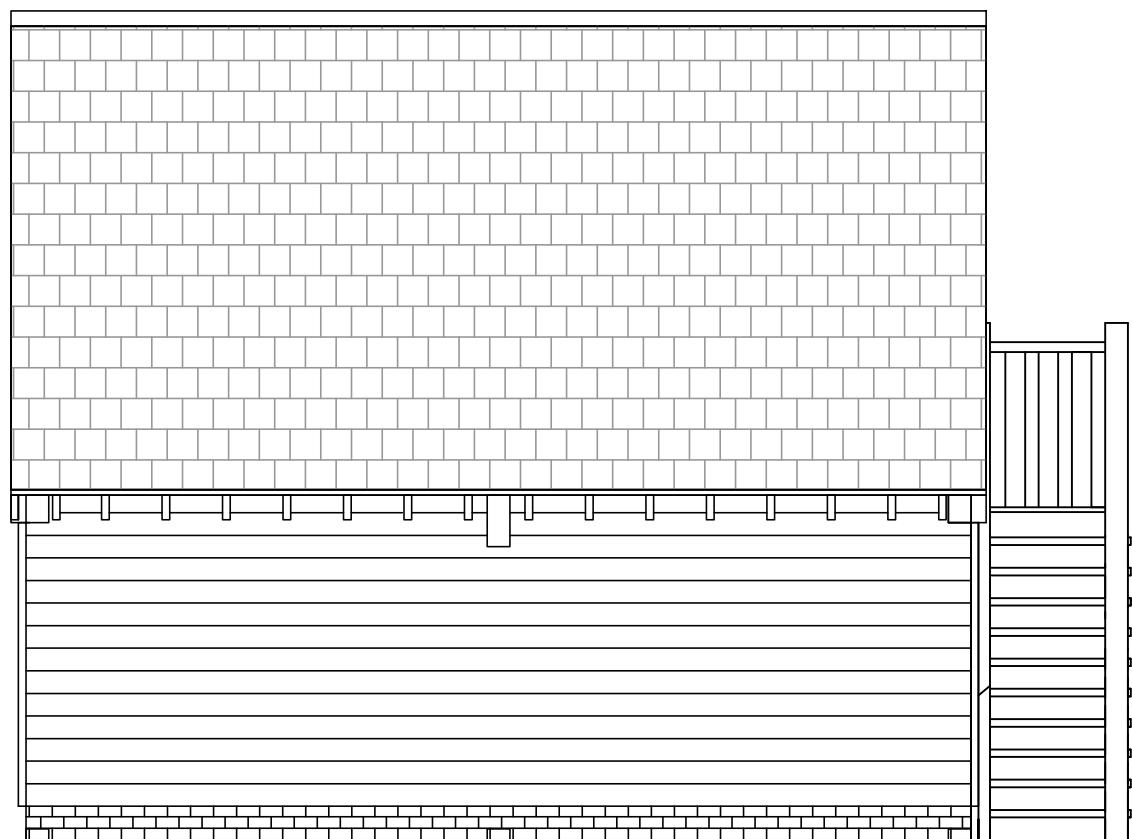

REAR ELEVATION

Groundwork Detail - Not to Scale
For guidance only and subject to building control approval if required

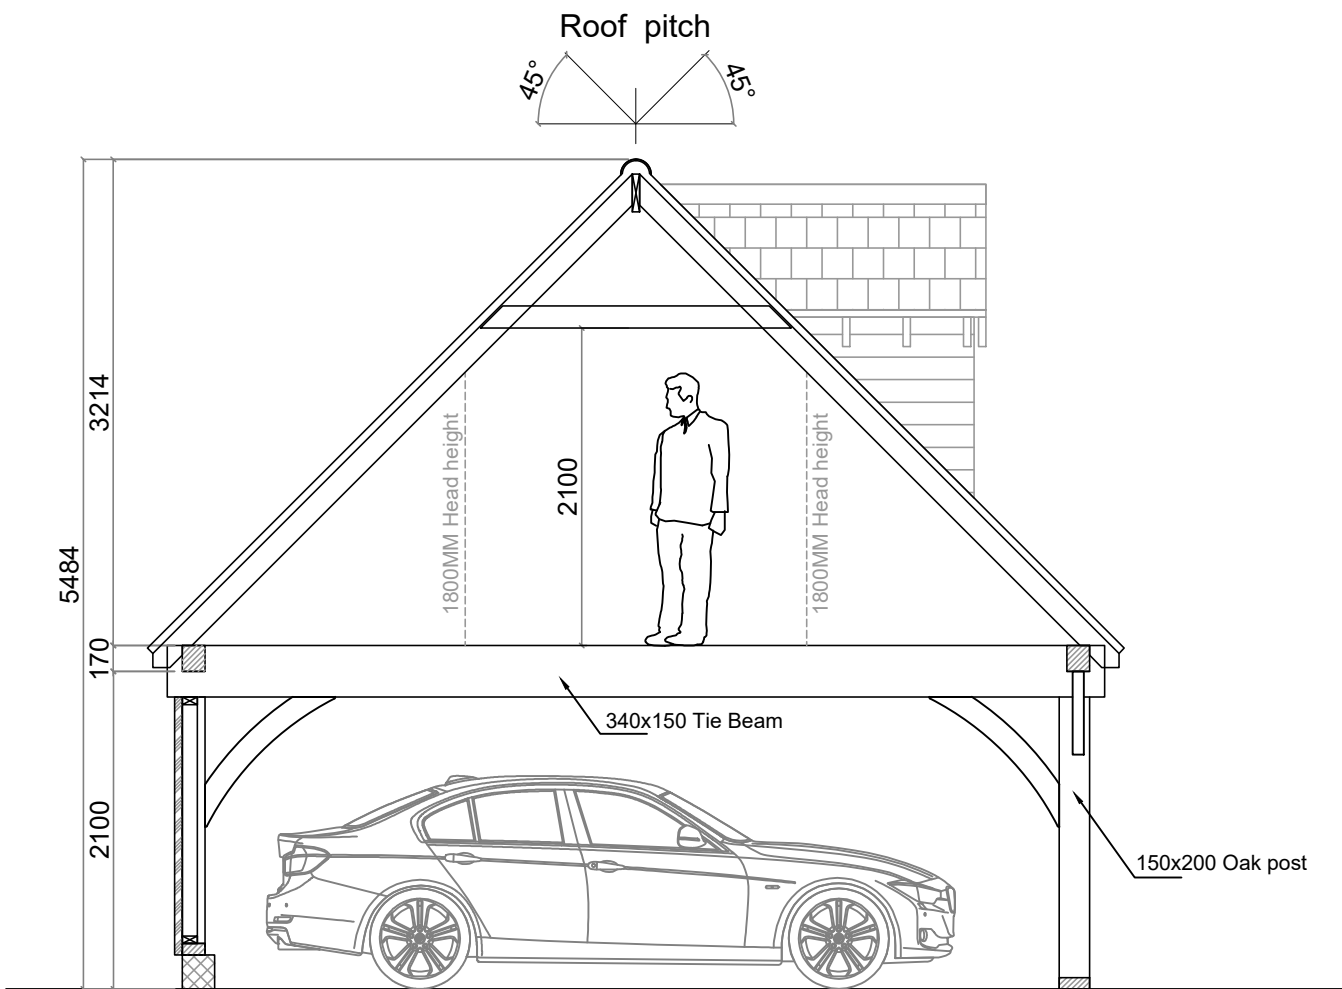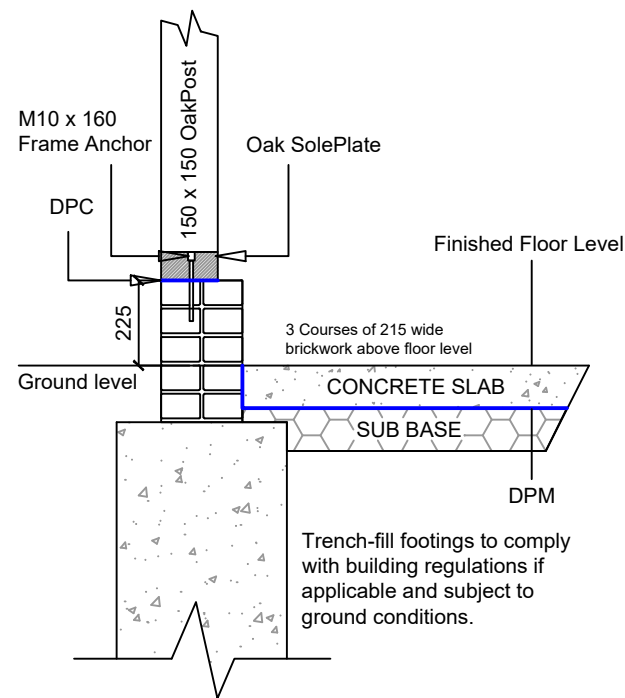

SECTION

**UNLESS STATED OTHERWISE,
YOUR GREEN OAK FRAME WILL BE CONSTRUCTED USING:**

OAK
SOLE PLATE FIXED ON BRICK
150 X 150 POSTS
170 X 150 TIE AND EAVE BEAMS
150 X 75 CURVED BRACES

SOFTWOOD
150 X 47 RAFTERS
200 X 47 RIDGE BEAM
100 X 47 STUDWORK
FEATHER-EDGE CLADDING

ALL GREEN OAK IS CLEANED
PRIOR TO DELIVERY.
ALL JOINTS ARE TRADITIONAL
MORTICE AND TENNON,
PEGGED WITH DRY OAK DOWEL.

ALL SOFTWOOD IS PRESSURE TREATED
WITH VACSOL-AQUA, WHICH PROVIDES
LONG TERM PROTECTION AGAINST
FUNGAL AND INSECT ATTACK,
AS WELL AS PROVIDING A CLEAR FINISH.