


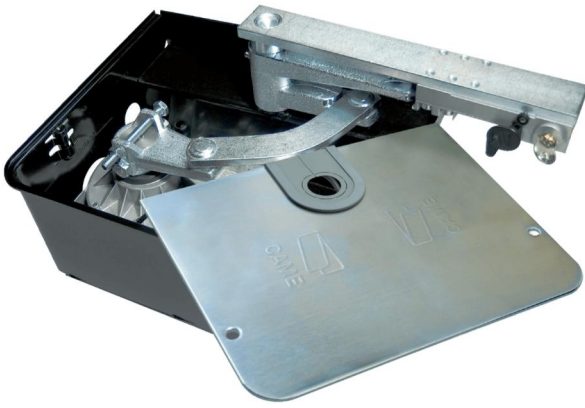

FROG

Concealed solution for applying in private homes or apartment buildings

Gate leaves up to 3,5 m

The invisible solution to power your gate

Protection rating against weathering agents IP67.

Foundation box in steel with anticorrosive treatment, or in AISI 304 stainless steel.

Automatic re-hooking of the release system after the gate manual maneuver.

Integrated, adjustable mechanical limit switches.

Opening up to 180° (with FL-180 accessory).

Set up for operation in case of power outage in the 24 V DC versions.

Developed with CONNECT technology for remote digital control via gateway or locally via CAMI

CAME 

CAME.COM