



Proposed Site Plan
1:100

All existing sewer locations and invert levels are to be checked on site prior to work commencing.


Any works near sewers are to be carried out in accordance with Structural Engineers details and building control approval and may be subject to further application / approval from local water authority

- Site Plan Key**
- SVP Soil and vent pipe
 - RWP Rain water pipe
 - IC Inspection chamber

Notes:

Note: No topographical survey has been carried out. Only basic site check dimensions for levels taken. All work to be checked on site against existing levels as work proceeds. Level information on this drawing to be used as indicative guide only

For ramp detail, refer to drawing 211

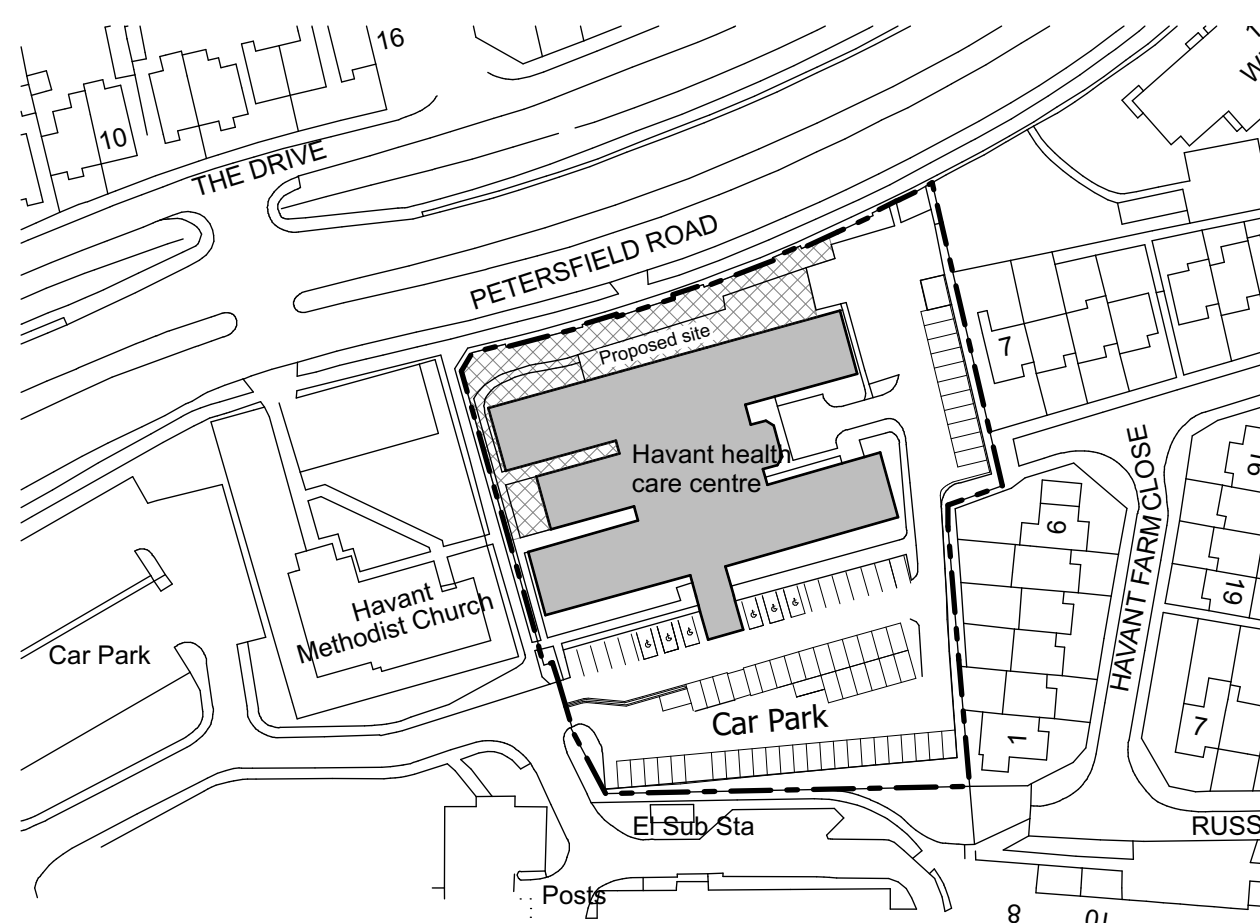

Site Plan
1:1250

NOT TO BE SCALED. DIMENSIONS TO BE CHECKED ON SITE
SCALING FOR LOCAL AUTHORITY PURPOSES ONLY

Location Plan

NOTES

In addition to the hazards/risks normally associated with the types of work detailed on this drawing take note of the above. It is assumed that all works on this drawing will be carried out by a competent contractor working, where appropriate, to an appropriate method statement.

CDM Risk Schedule

⚠	Specific health & safety risks associated with this building are highlighted, but not limited to the caution symbol adjacent to the item of risk. Refer to risk schedule on individual drawing.
⚠	Injury caused by incorrect handling of large / heavy items.
⚠	Potential to fall from height.
⚠	Potential to fall from height through voids within floors.
⚠	Harm caused by handling lead.
⚠	Harm caused by Electrocutation.

The contractor is to ensure that the proposed works will be executed in accordance with any relevant conditions appended to the Local Planning Authority's Decision Notice, the current Building Regulations or warranty providers standards if required; the requirements of the Fire Officer; the Institute of Electrical Engineers handbook (current edition) and the requirements of the local Water Authority where required.

Materials and workmanship should, where applicable, comply with the current British Standards Institute specifications and Codes of Practice. Where such guidance does not exist, materials and workmanship should conform to established good practice.

The location of existing services should be established prior to the commencement of any works - if discovered to be at variance with that shown on the drawings or services maps, the design consultants must be notified immediately.

The contractor is to check all dimensions, both internal and external, prior to the commencement of any works, including the ordering of materials - Any errors must be reported to the design team.

Where proprietary materials, fixtures or fittings are used, they must be placed / fitted strictly in accordance with the manufacturers written instructions and published details pertaining to the circumstance in which they are to be used.

The specification must be read in conjunction with all other drawings, schedules and documents which form part of this design package and Building Regulations submission.

Ensure All joints are taped / sealed in walls, floors and ceilings.

Any variations to be carried out on site should be brought to the attention of the design team for verification of compliance with statutory requirements and regulations prior to work commencing on site.

The drawing should be read in conjunction with Structural Engineers drawings and calculations.

All Structural Elements including steel beams, pad stones, all timber joints, lintels and ground floor structure to be carried out in accordance with Structural Engineers details. Any Structural sizes shown on this drawing are indicative only and must be read in conjunction with the Structural Engineers report.

DRAWING REFERENCE

Drawing	Drawing
001	Design Development
002	Design Proposals
200	Existing Site Plan
201	Proposed Site Plan
203	Existing and Proposed Groundworks plans
205	Existing and Proposed Elevations
210	Site Sections
211	Ramp detail

CONSTRUCTION ISSUE

Revision	Description	Date	Drawn
C2	Tarmac zones added to the west side of the site. Permitted development confirmation notes added to the retaining wall and ramps	15.06.20	PR
C1	CONSTRUCTION ISSUE	03.06.20	PR

Project:
**Proposed External Works
Havant Health Care Centre**

Drawing Title:
Proposed Site Plan

Drawn By	Date	Checked By	Date	Approved By	Date
PR	April 20				

Drawing No.	Revision:	Scale:
20.208 / 201	C2	As Shown @ A1

PRELIMINARY ☐ INFORMATION ☐ TENDER ☐ CONSTRUCTION ☒