

HALF LANTERN

IP44

A traditional wall mounted half lantern

Classic design Half Lantern in vandal and weather resistant polycarbonate.

The lantern is designed to be fitted near to doorways to optimise illumination for entrance areas, with this location in mind the PIR operates at 6 metres to reduce the number of nuisance activations.

The Half Lantern range is available with energy saving lamps or LED versions.

- Easy to install.
- IP44.
- Choice of standard, photocell and PIR options.
- PIR: Day time walk test.
- Shatter-proof polycarbonate detector.
- PIR range of 6 metres.
- 110° angle of detection.
- Photocell: dusk to dawn sensor.
- Designed to BS EN 60598.



Colour finish options



White
(W)



Black
(B)



Titanium
(X)

Lamp Types

- 9W TC-S.
- 13W TC-D.
- 14W E27.
- 18W TC-D.
- 60W B22 (Less lamp) / E27 also available.
- LED 3.
- LED 5.

Material

- Body: Vandal resistant polycarbonate self-extinguishing fire properties in black / white / titanium / other colours on request.
- Windows: Vandal resistant polycarbonate in clear (or premium opal in LED range).

Installation

- Simple installation.
- Photocell option external use only.

Standards

- IP44.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class I.





HALF LANTERN

HL



Other options or configurations may be available, please contact us on 01709 374898 or email sales@asdlighting.com for advice.

Product	Switch Start	High Frequency	3 Hour Maintained	Photocell	PIR	Dimmable	Night Light	Self Test
9W	■	■		■	■			
13W		■		■	■			
18W		■		■	■			
60W				■	■			
LED 3				■	■			
LED 5				■	■			

Half Lantern


Description	60W	9W	13W	18W	LED 3	LED 5
Black	HL/BK060	HL/BK009	HL/BK113	HL/BK118	HL/BKLED3	HL/BKLED5
White	HL/WK060	HL/WK009	HL/WK113	HL/WK118	HL/WKLED3	HL/WKLED5
Titanium	HL/XK060	HL/XK009	HL/XK113	HL/XK118	HL/XKLED3	HL/XKLED5

Half Lantern PIR

Description	60W PIR	9W PIR	13W PIR	14W PIR	18W PIR	LED 3 PIR	LED 5 PIR
Black	HL/BK060P	HL/BK009P	HL/BK113P	HL/BK114P	HL/BK118P	HL/BKLED3P	HL/BKLED5P
White	HL/WK060P	HL/WK009P	HL/WK113P	HL/WK114P	HL/WK118P	HL/WKLED3P	HL/WKLED5P
Titanium	HL/XK060P	HL/XK009P	HL/XK113P	HL/XK114P	HL/XK118P	HL/XKLED3P	HL/XKLED5P

Half Lantern Photocell

Description	60W PC	9W PC	13W PC	18W PC	LED 3 PC	LED 5 PC
Black	HL/BK060C	HL/BK009C	HL/BK113C	HL/BK118C	HL/BKLED3C	HL/BKLED5C
White	HL/WK060C	HL/WK009C	HL/WK113C	HL/WK118C	HL/WKLED3C	HL/WKLED5C
Titanium	HL/XK060C	HL/XK009C	HL/XK113C	HL/XK118C	HL/XKLED3C	HL/XKLED5C

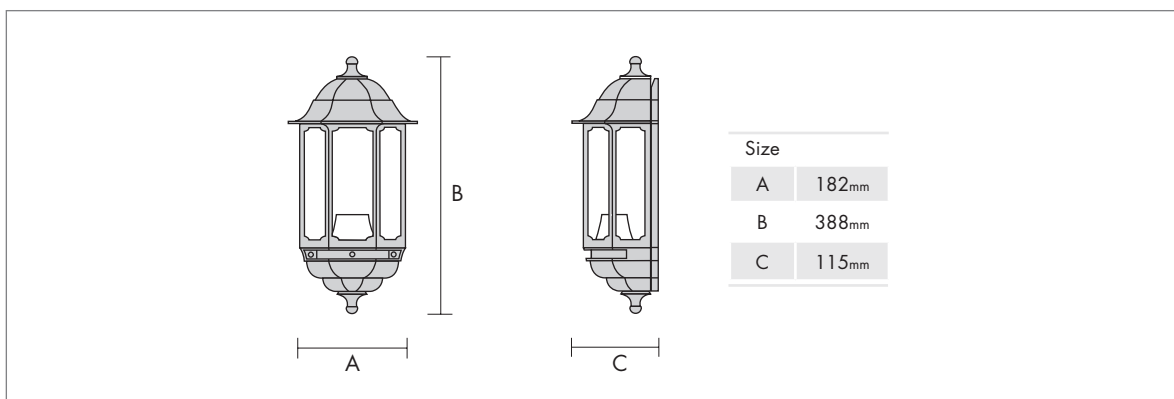

Lamp Types

- 9W TC-S.
- 13W TC-D.
- 14W E27.
- 18W TC-D.
- 60W B22 (less lamp) / E27 also available.
- LED 3.
- LED 5.

Material

- Body: Vandal resistant polycarbonate self-extinguishing fire properties in black / white / titanium / other colours on request.
- Windows: Vandal resistant polycarbonate in clear (or premium opal in LED range).

Installation

- Simple installation.
- Photocell option external use only.

Standards

- IP44.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class I.