



PEARCE SIGNS

BRINGING THE WORLD'S BRANDS TO LIFE

PROJECT:

NatWest - Waterloooville
ATM COVER-UP

DESIGN STATUS:

For Construction

DWG No:

005146

REV:

R00

PROJECT MANAGER:







Liam Scott

JOB No:

013618



NatWest

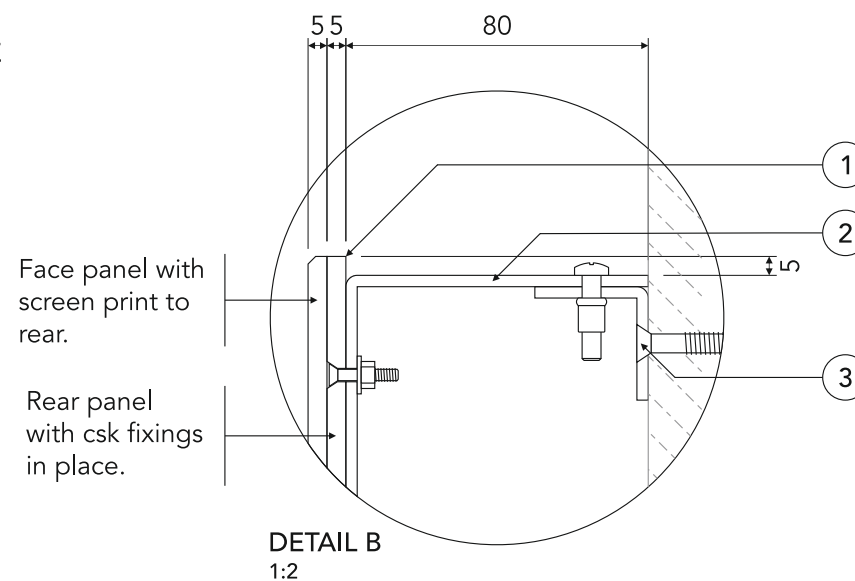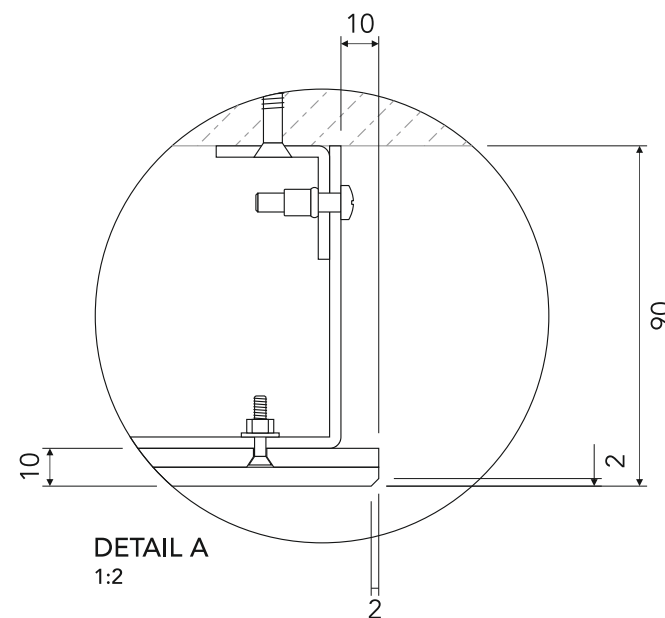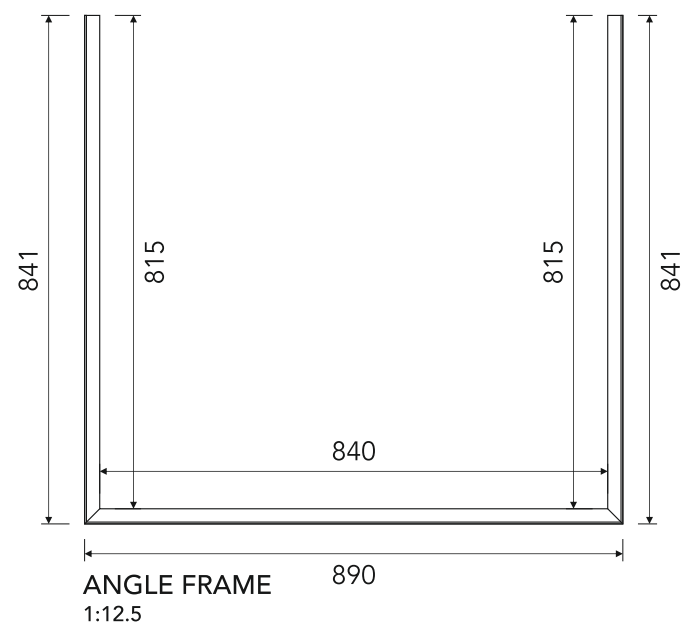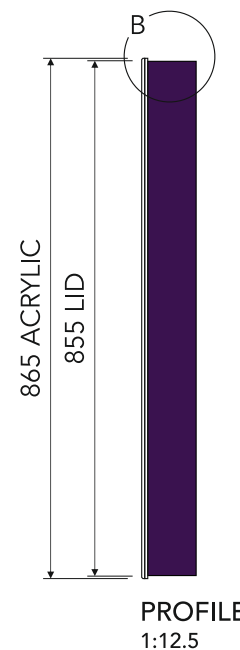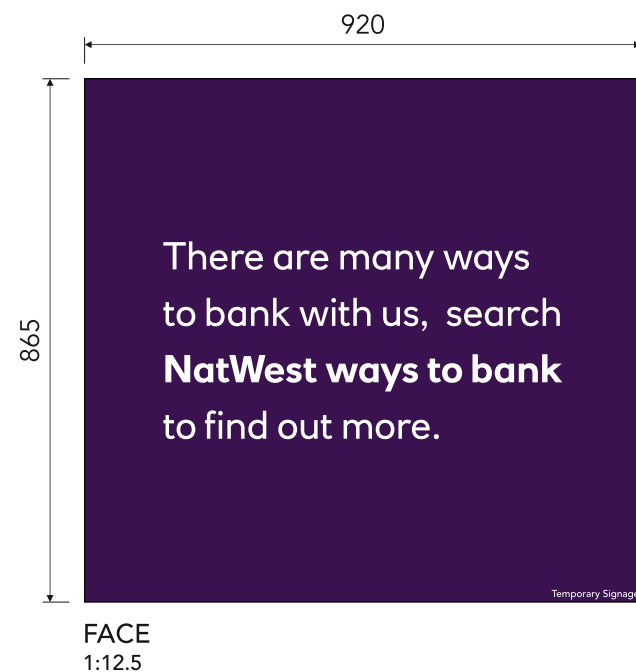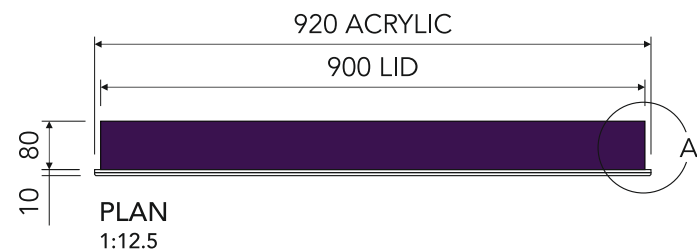

ITEM 01 1no. ATM Cover-up Surround (Bespoke)



SPECIFICATION:

- FACE** to consist of 2no. 5mm clear acrylic panels. Face panel to have 2x2mm bevelled edge to all sides with buffed and polished finish. Rear of face panel to be screen printed to detail with opaque vinyl backing. **PANEL IS NOT TO BE POLISHED AFTER SCREEN PRINTING!**
Rear panel to also have buffed and polished finish. Rear panel to be drilled with csk holes and have csk fixings siliconed in place, panel to be bonded to rear of face panel using double sided VHB tape with fixings in place. Bonded acrylic panel is then mounted to face of folded aluminium carrier lid with double sided VHB tape and the pre-placed csk fixings from the acrylic panel with washers and nuts. Face complete with stencil cut self-adhesive white vinyl text reading 'Temporary Vinyl'.
- CARRIER LID** from 3mm folded aluminium to a depth of 80mm, all finished NatWest Purple. Lid drilled to take pre-placed csk fixings from rear of acrylic face panel and secured using washers and nuts to rear.
- FIXING METHOD** to be mounted over 25x25x3mm angles welded into frame as illustrated and secured back using suitable fixings for site conditions/requirements. Fixing angles to be finished NatWest Purple.

DRAWING NOTES:

- Angle frame to be positioned to be flush with bottom of panel surrounding ATM machine (see dashed green line below).

EXISTING:



ATM(s) to be covered are outlined by Yellow dashed line