
KEY

- Tarmacadam surfaces to be replaced to include refurbishment of the kerb lines, falls and drainage.
- Precast concrete paving slabs to be re-laid.
- Brick paviors to be overhauled including raking out the existing pointing and replacing with new.
- Site boundary.



1 Timber access ramp to be temporarily disconnected, stored and reinstated to enable the surfacing works.

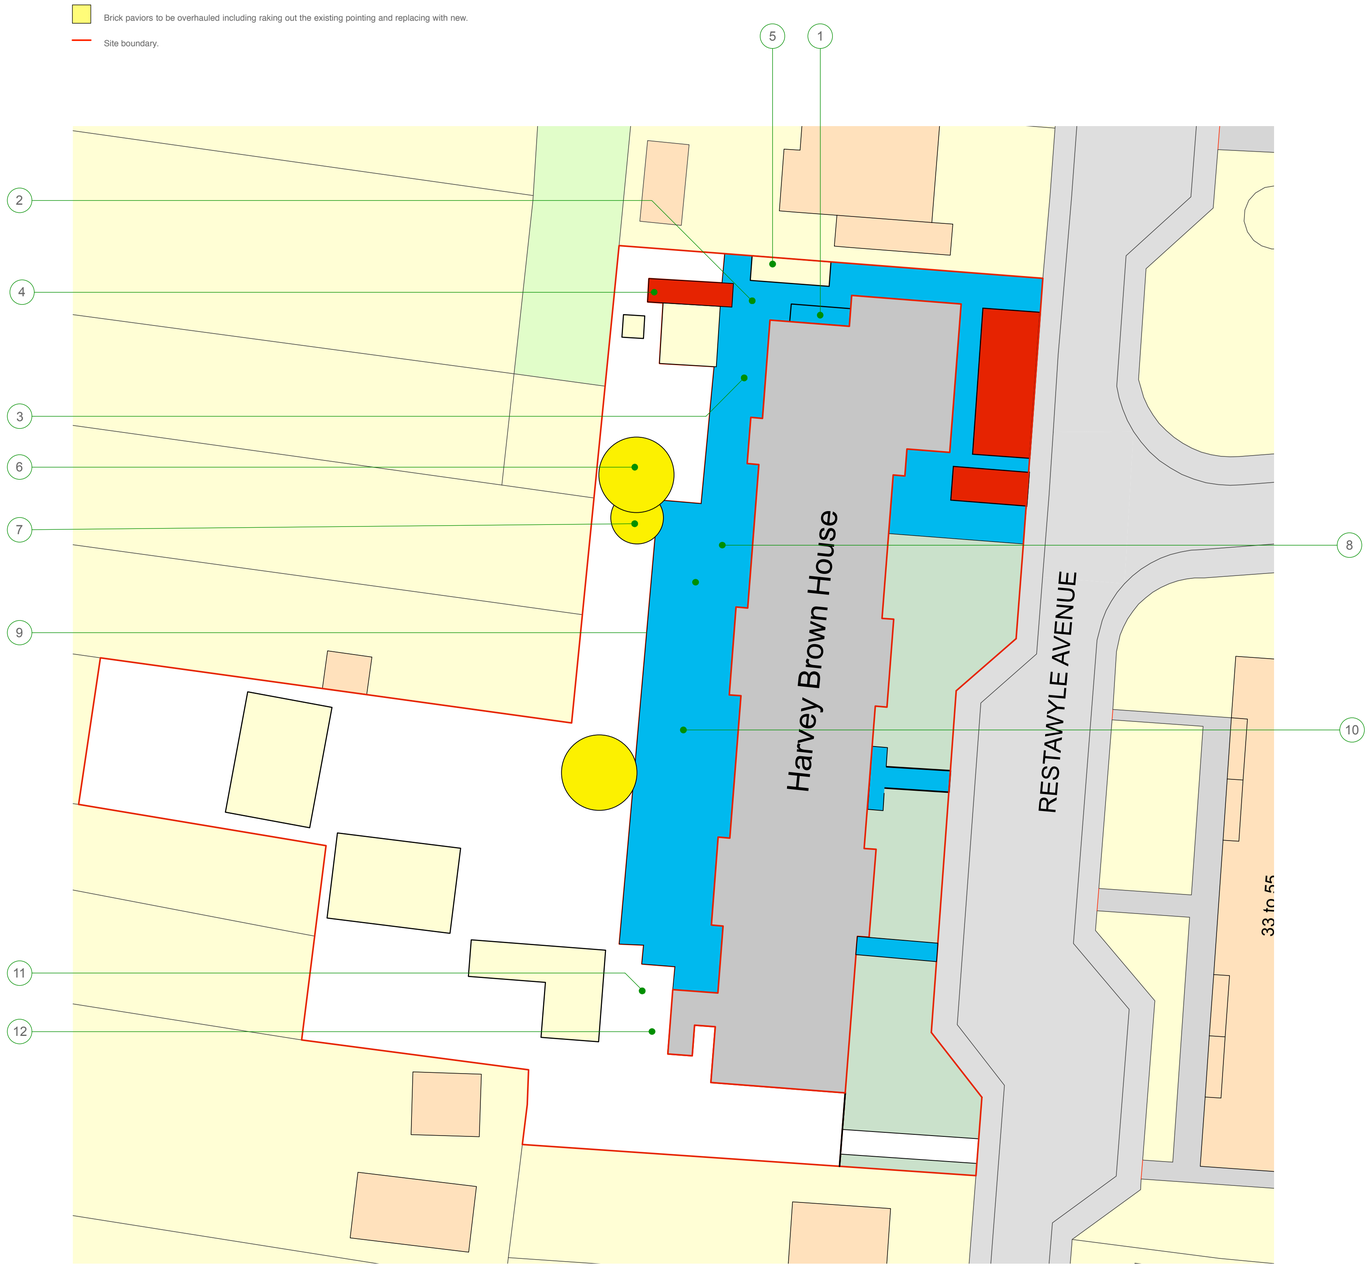

2 Worn surfaces and historic repairs.



3 Surfaces are generally worn.



4 Concrete paving to be lifted and relaid.



5 Paving slabs to be removed and asphalt surfacing installed.



6 Example general view of brick paviors



7 Joints to brick paviours to be raked out and repointed.



8 Surfaces worn with sediment over, due to localised flooding.



9 Drainage gullies to be cleared and surveyed.



10 Surfaces are generally worn. No major potholes.



11 Tarmacadam surfaces to the vehicular access road and parking area are in a better condition These surfaces are not to be included within the repairs.



12 Drainage provisions to be cleared and surveyed.



SITE PLAN - HARVEY BROWN HOUSE

NTS

Kendall Kingscott

Chartered Architects
Chartered Building Surveyors
Interior Designers
CDM Services

3 GP Centre, Yeoman Road,
Ringwood, Hampshire, BH24 3FF

+44 (0)1425 472 833
www.kendallkingscott.co.uk

Rev Date By Ap Note

Project: Planning - Resurfacing Works

Drawing Title: Proposed Resurfacing & Maintenance Work

Client: The Guinness Partnership

Project Number: 190630-2100

Drawing Number:

Revision: 1

Scale	Paper Size	Filename	Date	Drawn	Checked	Status
NTS	A1	170656.vwx	27/06/19	LW	AS	PRELIMINARY

© Copyright Do not scale this drawing Check all dimensions and levels on site

Only to be used on the site for which designed. The electronic transmission of designs/information contained in this drawing is carried out entirely at the User's risk and Kendall Kingscott Ltd. will have no liability for any errors or inaccuracies arising therefrom. The production of amended or updated information from the said designs/information by the User is entirely the responsibility of the User and Kendall Kingscott Ltd. shall have no responsibility in respect thereof whatsoever.