


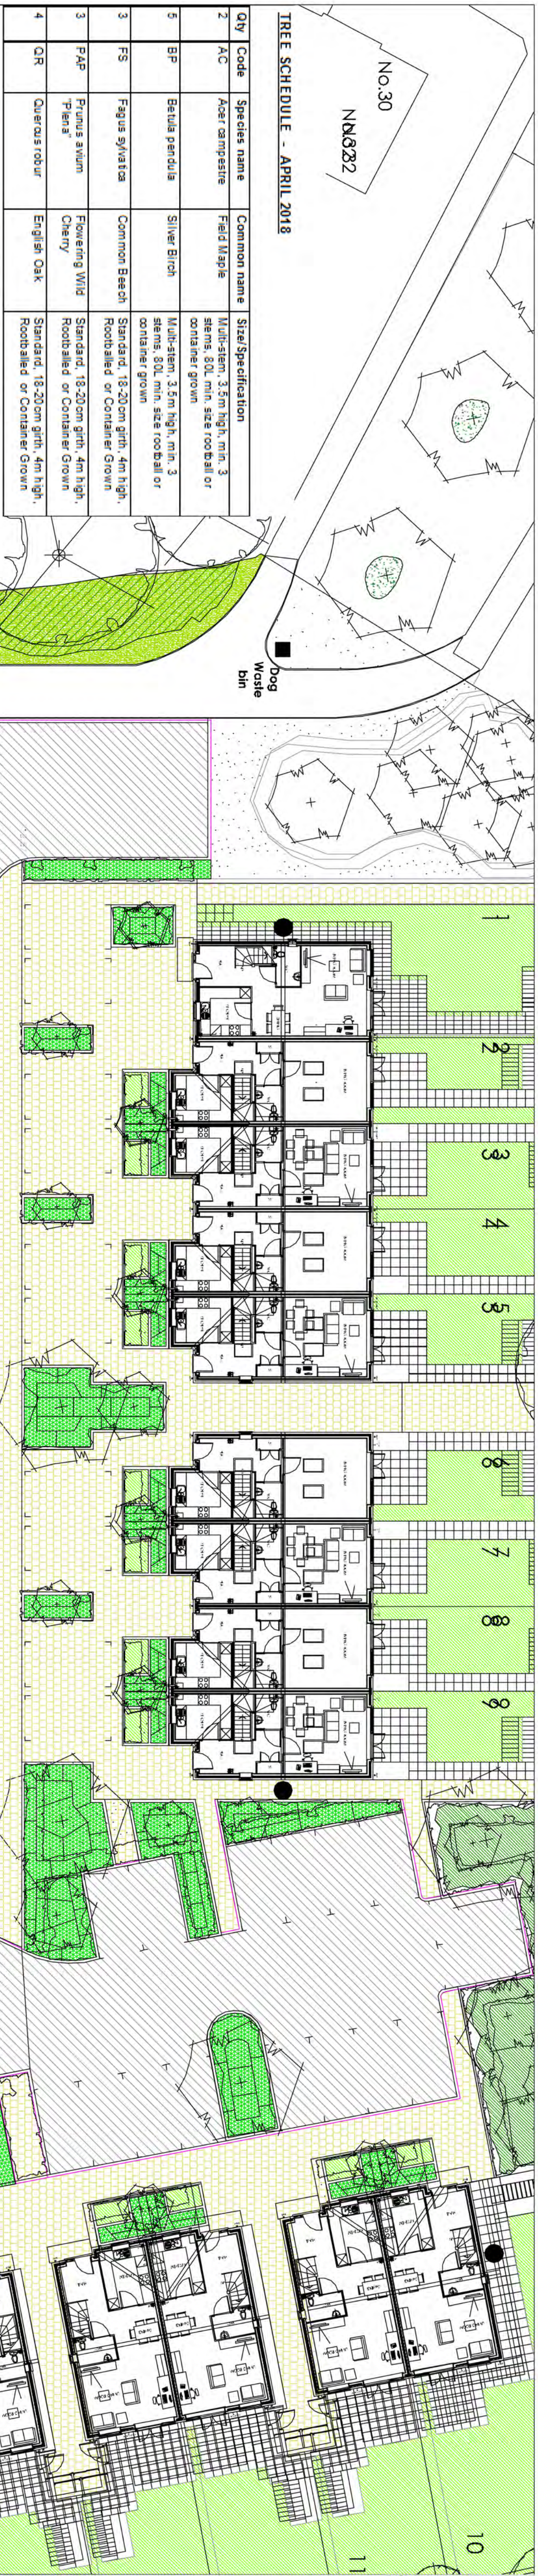

TREE SCHEDULE - APRIL 2018

Qty	Code	Species name	Common name	Size Specification
2	AC	<i>Asar canadense</i>	Field Maple	Multi-stem, 3.5m high, min. 3 stems, 80L min. size, root ball or container grown
5	BP	<i>Betula pendula</i>	Silver Birch	Multi-stem, 3.5m high, min. 3 stems, 80L min. size, root ball or container grown
3	FS	<i>Fagus sylvatica</i>	Common Beech	Standard, 18-20m girth, 4m high, Root balled or Container Grown
3	FAP	<i>Prunus avium</i> "Pears"	Flowering Wild Cherry	Standard, 18-20m girth, 4m high, Root balled or Container Grown
4	QR	<i>Quercus robur</i>	English Oak	Standard, 18-20m girth, 4m high, Root balled or Container Grown

Note: All trees to be planted in 500mm depth to soil over 400mm depth clean medium grade sand over 200mm depth pea shingle gravel for sufficient drainage. Pits to be min. 1200mm diameter and bark mulch to a depth of 75mm spread over entire pit surface. All standard trees to be double staked - method to be approved. All multi-stem trees to be triple staked, method to be approved. Samples of trees to be provided for approval prior to planting by POC landscape architect.

SPRING FLOWERING BULBS - APRIL 2018

Qty	Species name	Common name	Specification
250	Nardus ssp.	Difficult (mixed heights, colours white and yellow)	Grade 14/16, 25/m ²
250	Crocus vernus	Crocus (mixed colours)	Grade 7/8, 25/m ²
250	Galanthus nivalis	Snowdrop	Grade 7/8, 25/m ²
250	Scilla sibirica "Spring Beauty"	Squill	Grade 7/8, 25/m ²

Plant in random drifts of 10-15 bulbs of same species bulb in a single drift. Bulbs to be plump, single sprout and free of mould. Plant in correct seas according to specification.


No. 26 NND 474 N 10 33

PLANT SCHEDULE:
GROUND COVER PERENNIALS & ORNAMENTAL GRASSES

Total sq.m = 146sq.m, planted @ average 5 plants per sq.m = 730 plants

%	QV	Code	Species name	Common name	Specification
25	182	Adm	Arenaria	Phasant Tail	1L polystee, CG
25	182	Adm	Arenaria	Phasant Tail	4Lm2
15	110	CdI	Calamagrostis acutifolia Yearl	Festine Reed	1L polystee, CG
15	110	Des	Deschampsia cespitosa	Tufted Hair Grass	4Lm2
15	110	Des	Deschampsia cespitosa	Tufted Hair Grass	1L polystee, CG
10	73	Hsp	Hesperantha socotrae	Hesperantha	1L polystee, CG
25	182	Stpa	Stipa tenuissima	Mexican Feather Grass	1L polystee, CG
10	73	Verb	Verbena x bonariensis	Verbena	1L polystee, CG
10	73	Verb	Verbena x bonariensis	Verbena	5Lm2

note: All plants to be planted in 400mm deep green disposal, with composted sludge & fertiliser. Ensure good drainage beneath. All planting beds to be mulched with ornamental bark, mulch of dressing, 75mm depth. Plant spacing in drifts of 5-7 plants minimum number per planting area.

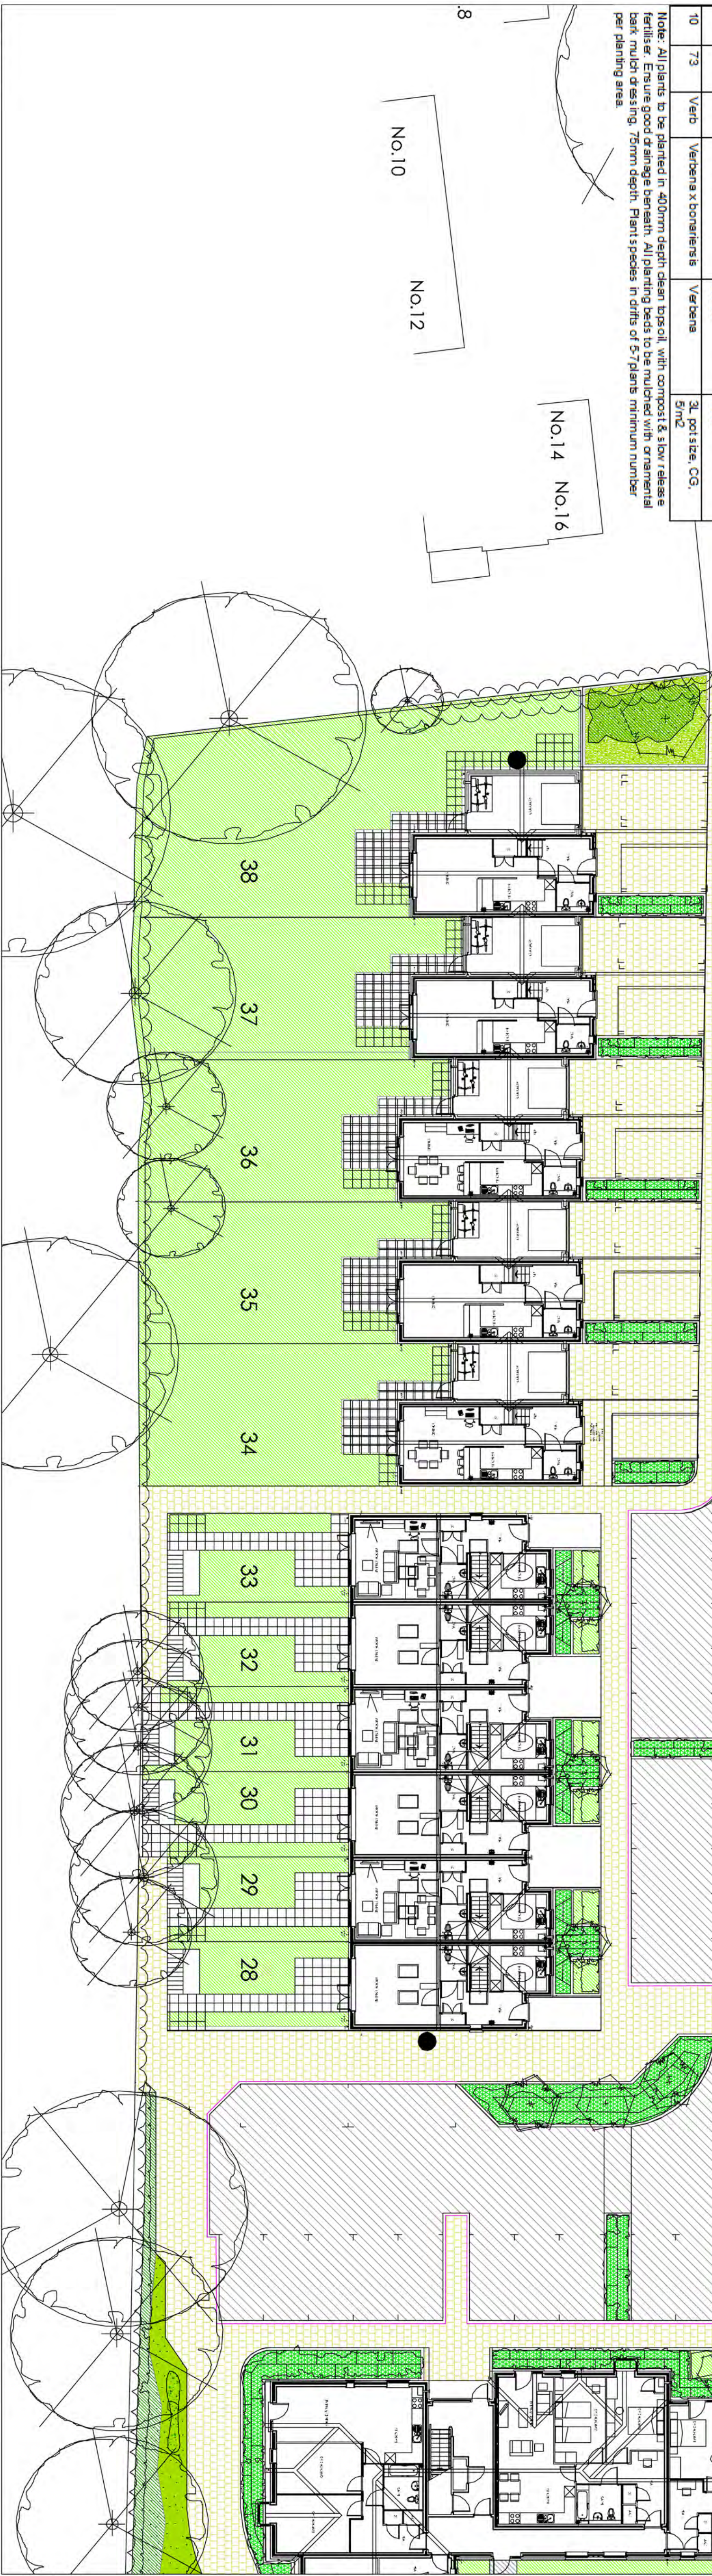

KEY

New trees - see
schedule

Ornamental grass
planting - see schedule

	Grass turf lawn
	Spring bulbs - see schedule
	Sand (play safety surface)
	Rubber matting (play safety surface)
	Tarmac path surface
	PCC path edging
	Grass mounds, 1.2m high max

	Glacial boulders
	Picnic tables
	Play tree trunk seat
	Play Area Works boundary
	Road surface (outside of Play area works)

ORDNANCE SURVEY COPYRIGHT
Based or reproduced from the 1984
Ordnance Survey 1:250 000 map with
the permission of HMSO Crown
Copyright reserved
License No.: 100019671

A	B	C	D
18-5-18	Litter bin added		
Rev	Date	(Revision Details if needed by)	Approved by
Project	KINGSCLEARE AVENUE HOUSING DEVELOPMENT		
Drawn Title	PLAY AREA PROPOSALS		

HOUSING & PROPERTY SERVICE

 **Portsmouth**
CITY COUNCIL

OWEN BUCKWELL
Head of Service

DEPARTMENTAL SECTION :
Tel No: 023 9283 4092

Drawing No
628044/LA/5401A