



Existing signage to be replaced



t1

Internally illuminated Fascia

600mm(h)
Existing building letters to be removed and area made good. New internally illuminated fascia with push through letters to be installed. Push-through letters to be positioned centrally above entrance doors.

Building Letters


330mm 'W' cap height
Letters to be removed and area made good. Panels to be replaced with new grey panels

t1

3m Totem

Existing totem to be removed and new totem to be installed in the same location.
Totem to be single sided.

Qty - 1

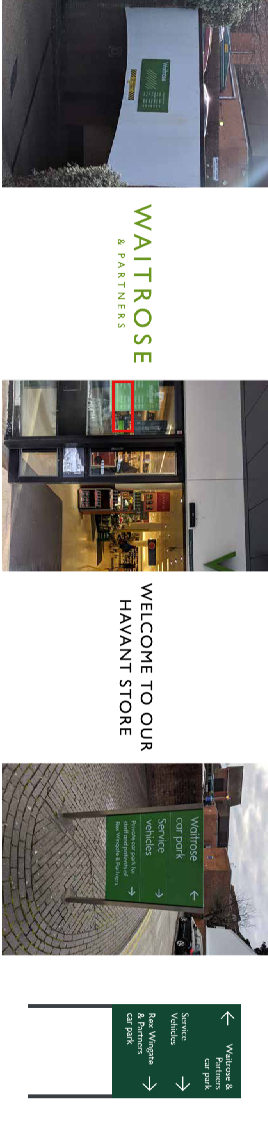

b5

Building Letters

Panel to be removed and area made good. Render to be painted white and new letters installed
Exact size of letters TBC.

Qty - 1

5

Welcome letters

59mm Cap height
Existing shopping hours vinyl to be removed, all residue cleaned and glazing made good. New sets of welcome letters to be installed on to glazing.

6

Directional Panel

856mm(w)
Whole sign to be removed and area made good. New sign to be installed in same location.
Artwork TBC

Qty - 1



7

Partner Parking

550mm(w)
Existing sign to be removed and new sign installed in same location.

Qty - 4

8

No pedestrian access

300mm(w)
Existing sign to be replaced with DFT sign.

Qty - 1

9

Max Height & Bump bar

4207mm(w) *Exact size TBC*
Existing panel and bump bar to be replaced with the latest standards.
Signage contractor to confirm available space. Max Height TBC

Qty - 1

Signage key

- New installation
- To be replaced
- To be repaired
- To remain
- To be removed