




85 FT WIRE.

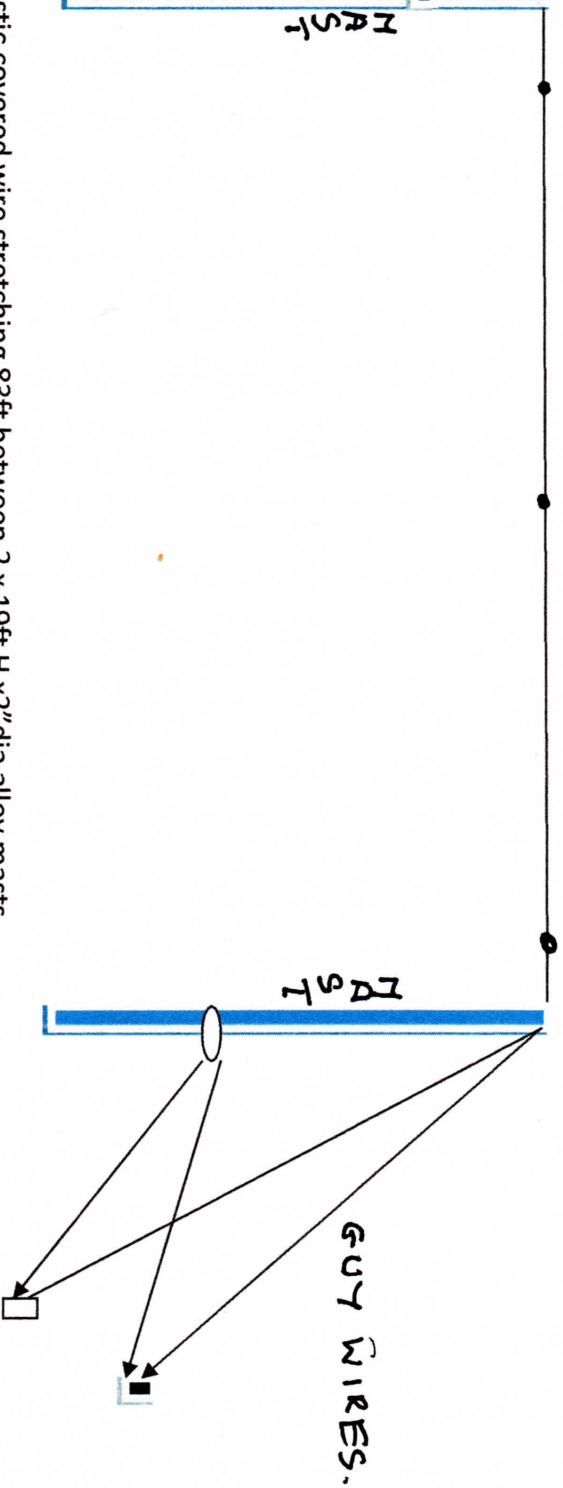

1 x 6mm Diam long plastic covered wire stretching 83ft between 2 x 19ft H x2" dia alloy masts.

The upper mast fixed to rear of bungalow by 2 x HD wall brackets, and the lower mast fixed to 2" steel spigot, driven into the ground, halfway along the back side of the greenhouse.

The mast will be guyed with 2 wires attached to the top of mast, and 2 attached, approx 7ft above the ground spigot.

The 4 wires are fixed to 2 x4" steel channels sections sunk into the ground approx 7ft apart, protruding approx 12" above ground with eyebolts fixed to top of both channel sections.