



Roofing

product catalogue

Marley Eternit's extensive range of tiles, slates, dry fix products, ventilation systems and accessories has been successfully enhancing and protecting our roofs for over 100 years.

We want to make your project as straightforward and successful as possible, so we're on hand to offer practical, experienced support in a range of useful ways.

This can be delivering urgent samples where and when they're needed, providing products that help you achieve an A+ rating and gain credits for your buildings, supplying bespoke fixing specifications, offering complete dry fixed ventilation solutions and much more.

In short, we're here to support you in any way we can and we're always happy to take some of the load off your shoulders.

Let ME lighten your load

Trust Marley Eternit to take the hassle out of roofing. If you ever need advice on any roofing related issue, you can rely on our team to give you a helping hand.

Call **ME** 01283 722588
Email info@marleyeternit.co.uk
Or visit www.marleyeternit.co.uk



All factories certified to
ISO 9001, ISO 14001,
OHSAS 18001

nssPlus



Contents

2	Introduction
4	Minimum banded quantities
5	Resources
6	BS 5534 solutions
8	Product selector
10	Clay plain tiles and fittings
19	Clay interlocking tiles and fittings

25	Fibre cement slates and fittings
33	Concrete plain tiles and fittings
36	Concrete interlocking tiles and fittings
51	Fixings
54	Dry fix and ventilation
63	Complementary products

	No. per band	Bands per pallet	Quantity per pallet
Fibre cement slates			
600 x 300mm slates	15	72	1080
600 x 600mm doubles	10	30	300
Thrutone 500 x 250mm	20	70	1400
Thrutone 500 x 250mm doubles	10	32	320
Thrutone 600 x 300mm Zinc Grey / Graphite	12	90	1080
Garsdale 600 x 300mm	15	60	900
Garsdale 600 x 600mm	n/a	n/a	300
Concrete tiles			
Plain tiles	10	90	900
Plain eaves/top	10	120	1200
Plain tile and half	10	54	540
Anglia	38	12	456
Ashmore	6	46	276
Double Roman, Mendip & Wessex	32	6	192
Edgemere Range	40	6	240
Ludlow Major	36	6	216
Ludlow Plus	43	12	516
Modern and Duo Modern	32	6	192
Concrete fittings			
Segmental ridge tiles	5	24	120
Modern ridge tiles	5	28	140
Clay plain tiles			
Canterbury handmade tiles	n/a	n/a	860
Canterbury handmade eaves	n/a	n/a	860
Canterbury handmade gables	n/a	n/a	560
Ashdowne tiles	11	105	1155
Ashdowne eaves	15	100	1500
Ashdowne tile and a half	12	63	756
Acme/Hawkins tiles	12	105	1260
Acme/Hawkins eaves	15	100	1500
Acme/Hawkins tile and a half	12	63	756
Creasing tiles*	12	105	1260
Clay interlocking tiles			
Lincoln tiles	4	88	352
Lincoln LH verge tiles	4	88	352
Maxima tiles*	4	60	240
Maxima LH verge tiles	4	20	80
Melodie tiles*	6	40	240
Melodie LH verge tiles	6	20	120

* Available as full pallets only

Resources



Technical advice

Our Technical Advisory Service is staffed by a qualified team with specialist knowledge.

Call 01283 722588 or

e-mail info@marleyeternit.co.uk



Sales support

Our Area Sales Managers have in-depth knowledge of your local area. They are available to visit your site to carry out a roof survey, and to offer specific solutions for both new build and refurbishment projects.

marleyeternit.co.uk/localcontacts



Fixing instructions and literature

Comprehensive sitework, fixing and installation literature and videos:

marleyeternit.co.uk/resources



Tilefix

Create instant fixing specifications based on the geographical location and building dimensions of specific building projects.

marleyeternit.co.uk/tilefix



Samples

Samples of clay interlocking and plain tiles, fibre cement slates and concrete tiles are available on request.

Tel 01283 722588

marleyeternit.co.uk/samples



Estimator

A tool designed to create a complete bill of materials for your roofing project, based on a wide range of roof shapes:

marleyeternit.co.uk/estimator



Stockist information

To find details for stockists of Marley Eternit products, visit:

marleyeternit.co.uk/stockists



Training centre

We have a purpose-built training centre where we are able to impart our expertise through a range of practical and classroom courses. To find out more about our courses, visit:

marleyeternit.co.uk/training



Customer services

Knowledgeable and friendly staff are available to offer quotations, expert advice, deal with orders and all other enquiries.

Call 08705 626400 or

e-mail info@marleyeternit.co.uk



Health and Safety

In line with the requirements of the Health and Safety at Work Act, The Consumer Protection Act and The Chemicals (Hazard Information and Packaging for Supply) Regulations and the Control of Substances Hazardous to Health Regulations, **please download and view copies of our COSHH data sheets**

at marleyeternit.co.uk/coshh

BS 5534 is the British

Standard for Slating and Tiling and provides the industry with guidance on best practice relating to the installation of roofs.

Contained within it is a vast array of information, ranging from batten selection, to the methods of fixing, through to wind uplift formulas which provide manufacturers like us with a means of calculating fixing specifications.

BS 5534 key factors

With extreme weather events such as gale force winds, driving rain and flooding on the rise and placing more strain on the UK roofscape than ever before, the standard was radically improved in 2014.

Critically, the changes now require mechanical fixing of all components, even if mortar bedded, and increased levels of tile fixings, especially clipping.

Updates to the British Standard for Slating and Tiling ultimately ensure that the UK is more closely aligned with the standards and practices outlined in the equivalent Eurocodes, as well as ensuring the best possible practice is followed to deliver durable, low maintenance roofs.

A greater proportion of tiles must be clipped



SoloFix – the one-piece clip and nail

Marley Eternit has launched SoloFix, a one-piece clip and nail for all standard interlocking tiles,



providing an affordable fixing that not only installs up to 30% faster than traditional clips, but delivers outstanding strength and durability.

To see how SoloFix performs against traditional clips, watch our roof installation race at marleyeternit.co.uk/solofix or scan the QR code below.



Mortar can no longer be used as the only means of fixing



Mortar bedded security kits

Where mortar bedding is required, Marley Eternit offers mortar bedded security ridge and hip kits. These provide installers with mechanical fixings to secure ridge and hip units directly to the timber framework of the roof.

Marley Eternit head clip and tail clip packs provide an effective solution for mechanically fixing small tile cuts at both the hip and valley.

To view a short installation video on both of our mortar bedded security kits, please visit marleyeternit.co.uk/securityridge or marleyeternit.co.uk/securityhip or scan the QR codes below.



Our new sitework guide app is your pocket expert on installing a roof system to British Standards

Search by construction or product to find the right BS 5534 and BS 5250 compliant system.





Provides comprehensive, easy to understand step-by-step fixing instructions.

To find out more, visit: marleyeternit.co.uk/pocketexpert

Download from the App Store, Google Play or Amazon by searching for Marley Eternit



Clay plain tiles

					
Features	Handmade Single camber	Handcrafted Single camber	Machine-made Single camber	Machine-made Double camber	Machine-made Single camber
Size	265 x 165mm	265 x 165mm	265 x 165mm	265 x 165mm	265 x 165mm
Minimum pitch	40°	35°	30°	35°	30°
Maximum pitch	90°	90°	90°	90°	90°
No. of colours	3	2	5	6	8
Page	11	12	13	14	15

Clay interlocking tiles

			
Features	Clay pantile Open gauge	Clay Double Roman Open gauge	Clay pantile Flexible gauge
Size	370 x 247mm	403 x 333mm	440 x 255mm
Minimum pitch	17.5°	17.5°	12.5°
Maximum pitch	70°	70°	70°
No. of colours	2	1	1
Page	20	22	23



Concrete plain tiles

	
Features	Cross camber
Size	267 x 168mm
Minimum pitch	35°
Maximum pitch	90°
No. of colours	9
Page	34

Other products

	Profile 6 profiled sheeting	Farmscape profiled sheeting	Profile 3 profiled sheeting	Cedral Lap	Cedral Click
Features	High strength sheet ideal for large projects	High strength sheet ideal for large projects	Smaller sheet ideal for smaller projects	Aesthetic plank for exterior cladding	Tongue and groove cladding plank
Size	Various	Various	Various	190 x 3600mm	190 x 3600mm
Minimum pitch	5°	5°	10°	n/a	n/a
Page	66	66	66	68	70

Fibre cement slates

					
Features	Riven surface Dressed edges	Textured surface Square edges	Smooth surface Dressed edges	Smooth surface Square edges	Fibre cement slate Vertical applications
Size	600 x 300mm	600 x 300mm	600 x 300mm	600 x 300mm 500 x 250mm	600 x 300mm
Minimum pitch	20° (moderate exposure) 22.5° (severe exposure)	20° (moderate exposure) 22.5° (severe exposure)	15° (moderate exposure)* 17.5° (severe exposure)*	15° (moderate exposure)* 22.5° (severe exposure)	n/a
Maximum pitch	90°	90°	90°	90°	n/a
No. of colours	2	1	3	8	8
Page	26	27	28	30	64

* Figures are for hook fixed Birkdale only. Minimum pitch for nail and rivet fixing is 20° (moderate exposure) or 22.5° (severe exposure).
** 4m max. rafter length.

Concrete interlocking tiles

					
Features	Thin leading edge Duo replicates smaller format slates	Flat appearance Duo replicates smaller format slates	Traditional profile	Double pantile	Simple, strong lines Ideal for refurbishment
Size	420 x 330mm	420 x 330mm	420 x 330mm	420 x 330mm	420 x 330mm
Minimum pitch	17.5°	17.5° (Smooth)	22.5° (Smooth)	15°	22.5° (Smooth)
Maximum pitch	90°	90°	90°	90°	90°
No. of colours	3, 2, 1	6, 2	7	7	7
Page	37-39	40-41	42	43	44

					
Features	High level of recycled aggregate Absorbs NOx	Small format Ideal for refurbishment	Clean lines Water shedding efficiency	Bullnose leading edge Classic pantile	Interlocking double plain tile
Size	420 x 330mm	265 x 165mm	420 x 330mm	387 x 230mm	267 x 333mm
Minimum pitch	30°	22.5°	15°	25° (Smooth)	25°
Maximum pitch	90°	90°	90°	90°	90°
No. of colours	1	6	2	3	3
Page	45	46	47	48	49

Canterbury handmade

True to tradition, a range of three distinctive handmade clay plain tile colours, with a fine sanded finish suitable for roofing and vertical tiling.



Colour availability



Loxleigh (F)



Burford (F)



Chailey (F)

Key (F) Fine sanded finish

Technical data

Size of tile	265mm x 165mm
Minimum pitch*	40°
Maximum pitch	90°
Minimum headlap	65mm (roof)
Maximum gauge	100mm (roof)
Tile thickness	13mm (nominal)
Cover width	165mm (nominal)
Covering capacity (net)	60 tiles/m ² at 100mm gauge (roof)
Weight of tiling (approx.)	74kg/m ² (0.73 kN/m ²) at 100mm gauge (roof)
Battens required (net)	10.0 lin.m/m ² at 100mm gauge (roof)
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Tile nails	38mm x 2.65mm
Authority	BS EN 1304

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay plain tiles Element Ref: 812410006)
- ✓ BES 6001 Responsible Sourcing certified
- ✓ Carbon footprint measurement

Product information

Tile camber
Single camber

Club†

Bullnose†

Feature tiles
For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.
† Made to order

Clay plain tiles and fittings

Canterbury handmade clay plain tile in Loxleigh

Ashdowne

Handcrafted clay plain tiles offer a warm, mellow appearance, with a granular texture and slight random irregularities that make each tile unique.



Colour availability



Aylesham Mix (F)



Ashurst (F)

Key (F) Fine sanded finish

Technical data

Size of tile	265mm x 165mm	
Minimum pitch*	35°	
Maximum pitch	90°	
Minimum headlap	65mm (roof)	35mm (vertical)
Maximum gauge	100mm (roof)	115mm (vertical)
Tile thickness	11mm (nominal)	
Cover width	165mm (nominal)	
Covering capacity (net)	60 tiles/m ² at 100mm gauge (roof)	53 tiles/m ² at 115mm gauge (vertical)
Weight of tiling (approx.)	65kg/m ² (0.64 kN/m ²) at 100mm gauge (roof)	57kg/m ² (0.56 kN/m ²) at 115mm gauge (vertical)
Battens required (net)	10.0 lin.m/m ² at 100mm gauge (roof)	8.7 lin.m/m ² at 115mm gauge (vertical)
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	38mm x 2.65mm	
Authority	BS EN 1304	

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability

- ✓ A* rated in the BRE Green Guide (based on generic rating for UK produced clay plain tiles Element Ref: 812410006)
- ✓ BES 6001 Responsible Sourcing certified
- ✓ Carbon footprint measurement

Product information

Tile camber
Single camber

Feature tiles
For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.
† Made to order

Bullnose†

Club†

Hawkins

Single cambered (longitudinal), machine-made clay tile, manufactured for over 150 years. This heritage, combined with modern firing techniques, gives a traditional colour range.



Colour availability



Dark Heather (F)



Staffordshire Blue (F)



Blue Smooth (S)



Staffordshire Mixture (F)



Fired Sienna (T)

Key (F) Fine sanded finish (S) Smooth finish (T) Textured finish

Technical data

Size of tile	265mm x 165mm	
Minimum pitch*	30°	
Maximum pitch	90°	
Minimum headlap	65mm (roof)	35mm (vertical)
Maximum gauge	100mm (roof)	115mm (vertical)
Tile thickness	11mm (nominal)	
Cover width	165mm (nominal)	
Covering capacity (net)	60 tiles/m ² at 100mm gauge (roof)	53 tiles/m ² at 115mm gauge (vertical)
Weight of tiling (approx.)	64kg/m ² (0.63 kN/m ²) at 100mm gauge (roof)	56kg/m ² (0.55 kN/m ²) at 115mm gauge (vertical)
Battens required (net)	10.0 lin.m/m ² at 100mm gauge (roof)	8.7 lin.m/m ² at 115mm gauge (vertical)
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	38mm x 2.65mm	
Authority	BS EN 1304	

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay plain tiles Element Ref: 812410006)
- ✓ BES 6001 Responsible Sourcing certified
- ✓ Carbon footprint measurement

Product information

Tile camber
Single camber

Feature tiles
For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.
† Made to order

Bullnose†

Club†

Acme double camber


Natural clay, machine-made plain tiles with longitudinal and latitudinal camber are able to create highly textured roofscapes with accentuated light and shade.



Colour availability



Smooth Brindle (S)



Antique (F)



Dark Brindle (S)



Burnt Flame (S)



Natural Orange (S)




Purple Blend (F)

Key (F) Fine sanded finish (S) Smooth finish

Colour availability



Red Sandfaced (F)



Red Smooth (S)



Century (S)



Farmhouse Brown Sandfaced (F)




Grey Sandfaced (F)



Mixed Brindle (S)



Heather Sandfaced (F)



Heather Blend (F)

Key (F) Fine sanded finish (S) Smooth finish

Technical data

Size of tile	265mm x 165mm	
Minimum pitch*	35°	
Maximum pitch	90°	
Minimum headlap	65mm (roof)	35mm (vertical)
Maximum gauge	100mm (roof)	115mm (vertical)
Tile thickness	11mm (nominal)	
Cover width	165mm (nominal)	
Covering capacity (net)	60 tiles/m ² at 100mm gauge (roof)	53 tiles/m ² at 115mm gauge (vertical)
Weight of tiling (approx.)	64kg/m ² (0.63 kN/m ²) at 100mm gauge (roof)	56kg/m ² (0.55 kN/m ²) at 115mm gauge (vertical)
Battens required (net)	10.0 lin.m/m ² at 100mm gauge (roof)	8.7 lin.m/m ² at 115mm gauge (vertical)
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	38mm x 2.65mm	
Authority	BS EN 1304	

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Technical data

Size of tile	265mm x 165mm	
Minimum pitch*	30°	
Maximum pitch	90°	
Minimum headlap	65mm (roof)	35mm (vertical)
Maximum gauge	100mm (roof)	115mm (vertical)
Tile thickness	11mm (nominal)	
Cover width	165mm (nominal)	
Covering capacity (net)	60 tiles/m ² at 100mm gauge (roof)	53 tiles/m ² at 115mm gauge (vertical)
Weight of tiling (approx.)	64kg/m ² (0.63 kN/m ²) at 100mm gauge (roof)	56kg/m ² (0.55 kN/m ²) at 115mm gauge (vertical)
Battens required (net)	10.0 lin.m/m ² at 100mm gauge (roof)	8.7 lin.m/m ² at 115mm gauge (vertical)
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	38mm x 2.65mm	
Authority	BS EN 1304	

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Acme single camber


Natural clay, machine-made, single cambered (longitudinal) plain tiles, offering crisp, contemporary lines and the warmth and character of clay at an affordable price.



Colour availability



Red Sandfaced (F)



Red Smooth (S)



Century (S)



Farmhouse Brown Sandfaced (F)




Grey Sandfaced (F)



Mixed Brindle (S)



Heather Sandfaced (F)




Heather Blend (F)

Key (F) Fine sanded finish (S) Smooth finish

Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay plain tiles Element Ref: 812410006)
- ✓ BES 6001 Responsible Sourcing certified
- ✓ Carbon footprint measurement

Product information



Tile camber
Double camber



Club†



Bullnose†


Feature tiles
For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order

Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay plain tiles Element Ref: 812410006)
- ✓ BES 6001 Responsible Sourcing certified
- ✓ Carbon footprint measurement

Product information



Tile camber
Single camber



Club†



Bullnose†

Feature tiles
For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order

Clay fittings and accessories

Clay ridges, hips and valleys

Available in a range of colours and angles. Recommended roof pitch may vary depending on product and system used. For details of the full range of hips and valleys, please contact the Technical Advisory Service.


Important note: All of the fittings shown on this page can be used with all clay plain tiles, but should not be used on a rafter pitch below 35° with Acme double camber and Ashdowne clay plain tiles.

1 Made to order (subject to minimum order quantities)

2 Some colours and angles made to order (subject to minimum order quantities)

3 Staffordshire Blue available to order


† Angle ridge wing length will vary depending on ridge angle




Granny bonnet hip
40-60° pitch



Semi-bonnet hip
30-40° pitch




Valley²
30-50° pitch
130-150° angles




Half round ridge
30-50° pitch




Half round ridge hip end¹
30-50° pitch




Half round ridge stop end¹
30-50° pitch




Third round hip²
30-45° pitch




Third round hip end²
30-45° pitch




450mm capped angular ridge³
75-135° angles
(Red Smooth, Slate Black and Staffordshire Blue)




450mm capped angular ridge stop end¹
75-135° angles
(Red Smooth, Slate Black and Staffordshire Blue)




450mm capped angular ridge hip end¹
75-135° angles
(Red Smooth, Slate Black and Staffordshire Blue)




Angular ridge stop end¹
75-135° angles




Angular ridge hip end¹
75-135° angles



Hogs back ridge²
30-45° pitch




Mono ridge¹
30-45° pitch




Aris hip²
30-45° pitch
130, 135°, 145° angles²

Clay crested ridges


Available in Red Smooth and Slate Black. Recommended roof pitch may vary depending on product and system used, please contact the Technical Advisory Service.




Plain roll top²
75-135° angles
(Red Smooth and Slate Black)



Club crested ridge
90° and 105° angles
(Red Smooth)




Cocks comb crested ridge
90° and 105° angles
(Red Smooth)




Two hole crested ridge
90° and 105° angles
(Red Smooth)

Clay finials


Available in a range of colours and angles. Recommended roof pitch may vary depending on product and system used, please contact the Technical Advisory Service.




Ball top finial¹
Half round and plain angle bases available




Fleur-de-Lys gable¹
Half round and plain angle bases available



Scroll finial¹
Half round and plain angle bases available



Falcon finial¹
Half round and plain angle bases available in 75° and 90° only



Dragon finial¹
75° and 90° plain angle bases only

Important note: All of the fittings shown on this page can be used with all clay plain tiles, but should not be used on a rafter pitch below 35° with Acme double camber and Ashdowne clay plain tiles.

1 Made to order (subject to minimum order quantities)


2 Some colours and angles made to order (subject to minimum order quantities)

† Angle ridge wing length will vary depending on ridge angle

Clay fittings and accessories

Clay plain tile fittings

Available in a range of colours.

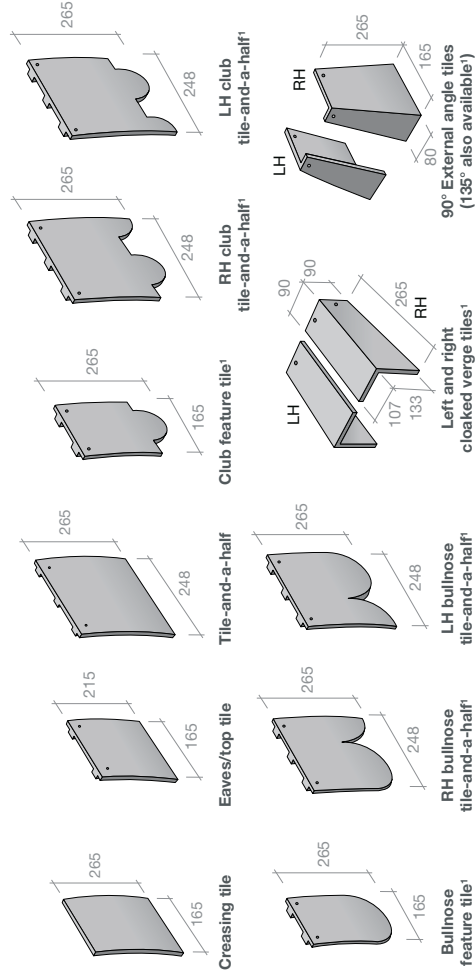


The following dry fix and/or ventilation systems can also be used with clay plain tiles (pages 56-57):


- > Universal 10mm and 25mm eaves vent systems
- > Universal plain tile vent
- > Universal GRP valley
- > Universal RidgeFast system (subject to ridge/hip angle)
- > Universal HipFast system (subject to ridge/hip angle)

Clay in-line tile vent

Available in a range of bases with real clay tile slips on the visible edge (3 tiles wide). The clay tile vent provides a net ventilation area of 7,500mm² per vent. Suitable for natural, mechanical or soil pipe ventilation.



Accessories



Tile vent adaptor

Flexible pipe

Clay interlocking tiles and fittings

¹ Made to order (subject to minimum order quantities)

Lincoln

The new Lincoln is an easy-to-fix clay pantile which balances traditional aesthetics with speed of installation.

Colour availability



Rustic Red (SS)



Natural Red (S)

Key (SS) Semi-sanded finish (S) Smooth finish



Technical data

Size of tile	370mm x 247mm
Minimum pitch*	17.5° (120mm headlap) 22.5° (75mm headlap)
Maximum pitch	70°
Minimum headlap	75mm
Maximum gauge	295mm
Cover width	222mm (nominal)
Covering capacity (net)	15.3 tiles/m² at 75mm headlap 18.0 tiles/m² at 120mm headlap
Weight of tiling (approx.)	43.0kg/m² at 75mm headlap 50.4kg/m² at 120mm headlap
Battens required (net)	3.4 lin.m/m² at 75mm headlap 4.0 lin.m/m² at 120mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Tile nails	38mm x 3.95mm
Fixing clips	Eaves, verge and tile clips
Authority	BS EN 1304

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Compatible dry fix and ventilation systems


- > Universal RidgeFast system (page 57)
- > Universal HipFast system (page 56)
- > Universal 10mm and 25mm eaves vent systems (page 56)
- > Universal GRP dry valley system (page 57)

Security fixing kits

- > Mortar bedded security ridge (page 53)
- > Mortar bedded security hip (page 53)

Lincoln fittings

Available in Rustic Red and Natural Red.




Left hand verge




Tile vent

Lincoln ridges and hips


Available in Rustic Red and Natural Red.




Half round ridge




Half round ridge end



Third round hip



Third round hip end



Dentil slips

Maxima



A clay interlocking double roman tile, suitable for roof pitches down to 17.5° , with an easy-to-lay open gauge design.

Colour availability




Natural Red

Technical data	
Size of tile	403mm x 333mm
Minimum pitch*	17.5°
Maximum pitch	70°
Minimum headlap	75mm
Batten spacing	328mm (at 75mm headlap)
Cover width	300mm (nominal)
Covering capacity (net)	10.1 tiles/m² at maximum gauge
Weight of tiling (approx.)	43.4kg/m² at 75mm headlap
Battens required (net)	3.05 lin.m/m² at 75mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Tile nails	45mm x 3.35mm aluminium clout head
Fixing clips	SoloFix (30443/30433), Eave clip (30452), LH verge tile clip (30289), LH verge clip – standard tile (30290)
Authority	BS EN 1304

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Maxima fittings

Available in Natural Red.



Left hand verge tile
(double roll)

Note: All measurements in mm.

Melodie



An interlocking single clay pantile with an easy-to-install flexible gauge, which is suitable for roof pitches as low as 12.5°.

Colour availability



Natural Red

Technical data	
Size of tile	440mm x 255mm
Minimum pitch*	12.5°
Maximum pitch	70°
Minimum headlap	92mm
Batten spacing	314mm (minimum gauge)
Cover width	209mm (nominal)
Covering capacity (net)	13.8 tiles/m² at 92mm headlap
Weight of tiling (approx.)	44kg/m² at 92mm headlap
Battens required (net)	2.88 lin.m/m² at 92mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Tile nails	45mm x 3.35mm aluminium clout head
Fixing clips	SoloFix (30435/30445), Eave clip (30452), LH verge tile clip (30285)
Authority	BS EN 1304

* This minimum pitch is suitable for rafter lengths up to 6 metres. For longer rafter lengths, please contact our Technical Advisory Service.

Melodie fittings

Available in Natural Red.




Left hand verge tile
(double roll)

Note: All measurements in mm.

Clay interlocking tiles fittings and accessories

Concrete ridges and hips for use with Maxima and Melodie clay interlocking tiles

Available in Mosborough Red. Recommended roof pitch may vary depending on product and system used, please contact the Technical Advisory Service.

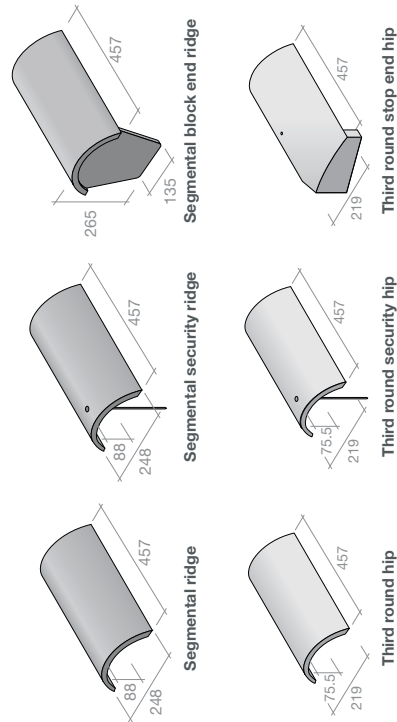

The following Universal products and accessories can be used with concrete segmental ridges, third round hip tiles and for use with Maxima and Melodie interlocking clay tiles.

- > Universal 10mm and 25mm eaves vent systems
 - > Universal tile vent (Maxima only)
 - > Mortar bedded security ridge
 - > Mortar bedded security hip
- > Universal HipFast system
- > Universal RidgeFast system
- > Universal GRP dry valley

Note: All measurements in mm.

Fibre cement slates and fittings

Thrutone Blue/Black, Tickford Park Primary School, Newport Pagnell

Rivendale

A finely detailed surface and dressed edges that together reproduce the attractive appearance of natural slate.

Colour availability



Blue/Black



Cromleigh Graphite

Technical data	
Size of slate	600mm x 300mm
Minimum pitch*	Moderate exposure
	22.5° (100mm headlap)
	20° (110mm headlap)
	25° (100mm headlap)
Maximum pitch	Severe exposure
	22.5° (100mm headlap)
	90°
Typical headlaps	100, 110mm
	Maximum gauge
Slate thickness	245-250mm
	4mm (nominal)
Covering capacity (net)	13.4 slates/m² at 100mm headlap
	13.6 slates/m² at 110mm headlap
Weight of slating (approx.)	20.4kg/m² (0.20 kN/m²) at 100mm headlap
	20.9kg/m² (0.20 kN/m²) at 110mm headlap
Battens required (net)	4.00 lin.m/m² at 100mm headlap
	4.08 lin.m/m² at 110mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)
	50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Fixings	Slate nails (30mm x 2.65mm)
	Copper disc rivets (19mm diameter x 2mm stem)
Authority	
BS EN 492	

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Edge profile



Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK and Ireland produced fibre cement slates Element Ref: 812410008)
- ✓ BES 6001 Responsible Sourcing 'Very Good'
- ✓ EPD available for Rivendale slates

Garsdale

A detailed surface and square edge that closely resembles natural slate, but is easier and faster to install.

Colour availability



Blue/Black

Technical data	
Size of slate	600mm x 300mm
Minimum pitch*	Moderate exposure
	22.5° (100mm headlap)
	20° (110mm headlap)
	25° (100mm headlap)
Maximum pitch	Severe exposure
	22.5° (110mm headlap)
	90°
Typical headlaps	100, 110mm
	Maximum gauge
Slate thickness	245-250mm
	4mm (nominal)
Covering capacity (net)	13.4 slates/m² at 100mm headlap
	13.6 slates/m² at 110mm headlap
Weight of slating (approx.)	20.4kg/m² (0.20 kN/m²) at 100mm headlap
	20.9kg/m² (0.20 kN/m²) at 110mm headlap
Battens required (net)	4.00 lin.m/m² at 100mm headlap
	4.08 lin.m/m² at 110mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)
	50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Fixings	Slate nails (30mm x 2.65mm)
	Copper disc rivets (19mm diameter x 2mm stem)
Authority	
BS EN 492	

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Edge profile



Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK and Ireland produced fibre cement slates Element Ref: 812410008)
- ✓ BES 6001 Responsible Sourcing 'Very Good'
- ✓ EPD available for Garsdale slates

Birkdale

A smooth surface and dressed edges offer a traditional and pleasing look using nail and rivet fixing down to 20°.

Colour availability



Blue/Black



Low pitch Birkdale



Birkdale slates can be used for low pitches down to 15° (with hook fixing). This complements our Birkdale range using nail and rivet fixing for steeper pitches.


Colour availability



Blue/Black



Flame Grey



Flame Brown

Technical data	
Size of slate	600mm x 300mm
Minimum pitch*	Moderate exposure 22.5° (100mm headlap) 20° (110mm headlap) Severe exposure 25° (100mm headlap) 22.5° (110mm headlap)
Maximum pitch	90°
Typical headlaps	100, 110mm
Maximum gauge	245-250mm
Slate thickness	4mm (nominal)
Covering capacity (net)	13.4 slates/m² at 100mm headlap 13.6 slates/m² at 110mm headlap
Weight of slating (approx.)	20.4kg/m² (0.20 kN/m²) at 100mm headlap 20.9kg/m² (0.20 kN/m²) at 110mm headlap
Battens required (net)	4.00 lin.m/m² at 100mm headlap 4.08 lin.m/m² at 110mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Fixings	Slate nails (30mm x 2.65mm) Copper disc rivets (19mm diameter x 2mm stem)
Authority	BS EN 492

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Edge profile



Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK and Ireland produced fibre cement slates Element Ref: 812410008)
- ✓ BES 6001 Responsible Sourcing 'Very Good'
- ✓ EPD available for Birkdale slates

Technical data	
Size of slate	600mm x 300mm
Minimum pitch*	15° (150mm lap, max. 6m rafter length) 17.5° (150mm lap, max. 9m rafter length)
Maximum pitch	90°
Typical headlaps	150mm
Maximum gauge	225mm
Slate thickness	4mm (nominal)
Covering capacity (net)	14.8 slates/m² at 150mm headlap
Weight of slating (approx.)	22.8kg/m² (0.20 kN/m²) at 150mm headlap
Battens required (net)	4.45 lin.m/m² at 150mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Fixings	Slate hooks (150mm) Slate nails for local areas of roof (30mm x 2.65mm) Copper disc rivets for local areas of roof (19mm diameter x 2mm stem)
Authority	BS EN 492

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Edge profile



Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK and Ireland produced fibre cement slates Element Ref: 812410008)
- ✓ BES 6001 Responsible Sourcing 'Very Good'
- ✓ EPD available for Birkdale slates

Hook fixing



Watch a quick video on hook fixing at marleytermit.co.uk/birkdale or scan the QR code shown.




Thrutone




A smooth surface and square cut edges give a low profile slate at an economical price with a minimum pitch of 15°.

Colour availability



Blue/Black



Stone Green*



Graphite*



Heather*



Russet*



Zinc Grey*



Turf Brown*



Terracotta*

Shape availability



Bullnose*



Chamfered*



Scalloped*

Technical data		
Size of slate	600mm x 300mm	500mm x 250mm
Minimum pitch*		
Moderate exposure	22.5° (100mm headlap) 20° (110mm headlap)	22.5° (100mm headlap)
Severe exposure	25° (100mm headlap) 22.5° (110mm headlap)	25° (100mm headlap)
4m max. rafter length	15°-17.5° (110mm headlap)	
6m max. rafter length	17.5°-20° (110mm headlap)	
Maximum pitch	90°	90°
Typical headlaps	100, 110mm	100mm
Maximum gauge	245-250mm	200mm
Slate thickness	4mm (nominal)	4mm (nominal)
Covering capacity (net)	13.4 slates/m ² at 100mm headlap 13.6 slates/m ² at 110mm headlap	20.0 slates/m ² at 100mm headlap
Weight of slating (approx.)	20.4kg/m ² (0.20 kN/m ²) at 100mm headlap 20.9kg/m ² (0.20 kN/m ²) at 110mm headlap	21.3kg/m ² (0.21 kN/m ²) at 100mm headlap
Battens required (net)	4.00 lin.m/m ² at 100mm headlap 4.08 lin.m/m ² at 110mm headlap	5.00 lin.m/m ² at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Fixings	Slate nails (30mm x 2.65mm) Copper disc rivets (19mm diameter x 2mm stem)	Slate nails (30mm x 2.65mm) Copper disc rivets (19mm diameter x 2mm stem)
Authority	BS EN 492	BS EN 492

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Edge profile




Sustainability


- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK and Ireland produced fibre cement slates Element Ref: 812410008)
- ✓ BES 6001 Responsible Sourcing 'Very Good'
- ✓ EPD available for Thrutone slates

Fibre cement slate fittings


Increments are in 5° where ranges of angle are indicated.
Available in Blue/Black. Recommended roof pitch may vary depending on product and system used, please contact the Technical Advisory Service. **See pages 56-57 for Universal accessories, which are compatible with fibre cement slates.**
Also available: In-line ridge ventilator stepped adaptor, Flexible pipe.




Duo pitch ridge*
(15° to 60°)




Stop end for duo pitch ridge*
(15° to 60°)




Monopitch ridge*
(15° to 45°)




Stop end for monopitch ridge*
(15° to 45°)



In-line ridge ventilator
plus extension sleeve
(20° to 45°)



In-line slate ventilator



Fibre cement ridge roll

Concrete plain tiles and fittings

Concrete plain tile, Smooth Grey, Workington, Cumbria

Plain


The authentic cross camber design of the Marley Eternit concrete plain tile gives it a look to match its outstanding versatility.

Colour availability

Key (F) Fine sanded finish (G) Granular finish (S) Smooth finish




Mosborough Red (S)



Natural Red (F)



Old English Dark Red (S)



Dark Red (G)



Smooth Brown (S)



Antique Brown (G)



Smooth Grey (S)



Greystone (G)



Anthracite (S)




Technical data	
Size of tile	267mm x 168mm
Minimum pitch*	35°
Maximum pitch	90°
Minimum headlap	65mm (roof)
Maximum gauge	100mm (roof)
Tile thickness	12mm (nominal)
Cover width	168mm (nominal)
Covering capacity (net)	60 tiles/m ² at 100mm gauge (roof)
Weight of tiling (approx.)	73.8kg/m ² (0.72 kN/m ²) at 100mm gauge (roof)
Batters required (net)	10.0 ltn./m ² at 100mm gauge (roof)
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Tile nails	38mm x 2.65mm
Authority	BS EN 490
* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.	

Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete plain tiles
Element Refs: 812410017, 812410050, 812410064)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

Product information

Tile camber
Single camber



Compatible with clay feature tiles
For advice on the use of Feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order




Club†



Bullnose†

Plain tile fittings

Available in all colours to match main tiles.

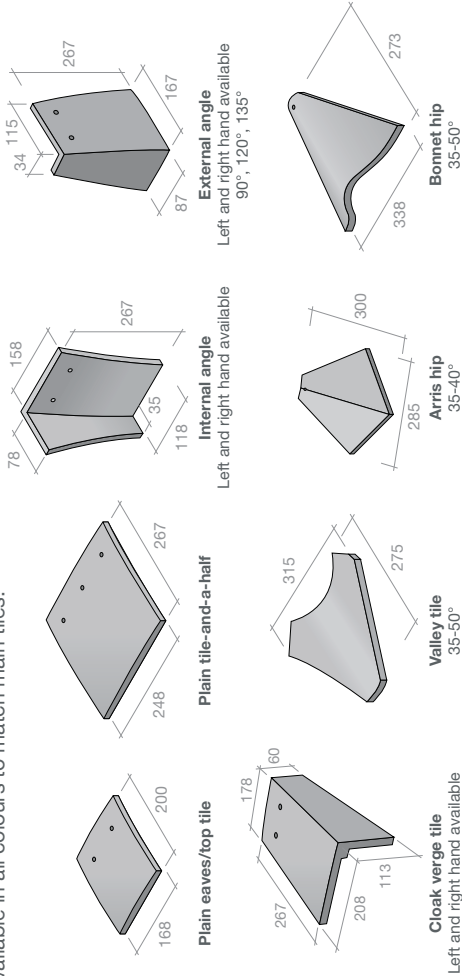

Verges, ridges and hips
For ridges and hips compatible with concrete plain tiles, see page 50.

Concrete interlocking tiles and fittings

Mendip interlocking tiles, Mosborough Red, Dog Rescue Centre, Bldworth

Edgemere

A clean and precise slate-like appearance is enhanced by the thin leading edge and the broken bond laying technique.

Colour availability



Smooth Brown (S)



Smooth Grey (S)



Old English Dark Red (S)

Key (S) Smooth finish



Technical data

Size of slate	420mm x 330mm
Minimum pitch*	22.5° (75mm headlap) 17.5° (100mm headlap)
Maximum pitch	90°
Minimum headlap	75mm (22.5° and above) 100mm (below 22.5°)
Maximum gauge	345mm
Tile thickness	18mm (nominal)
Cover width	298mm (nominal)
Hanging length	395mm (nominal)
Covering capacity (net)	9.7 slates/m ² (0.43 kN/m ²) at 75mm headlap 10.5 slates/m ² (0.47 kN/m ²) at 100mm headlap
Weight of slating (approx.)	44kg/m ² (0.43 kN/m ²) at 75mm headlap 47.5kg/m ² (0.47 kN/m ²) at 100mm headlap
Battens required (net)	2.9 lin./m ² at 75mm headlap 3.1 lin./m ² at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Fixings	45mm x 3.35mm slate nails
Fixing clips	Eaves, verge and slate clips
Authority	BS EN 490

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.


Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

Edgemere half slate

Available in all colours to match main tiles.

Edgemere should be laid broken bond. The required broken bond pattern is created by the introduction of half slates, to form verges in alternate courses. Half slates are formed on site by cutting along the scoreline.



Note: All measurements in mm.

Duo Edgemere

A thin leading edge interlocking slate designed to look like and blend in with small format slates.

Colour availability



Smooth Grey (S)

Key (S) Smooth finish



Old English Dark Red (S)

Technical data	
Size of slate	420mm x 330mm
Minimum pitch*	22.5° (75mm headlap) 17.5° (100mm headlap)
Maximum pitch	90°
Minimum headlap	75mm (22.5° and above) 100mm (below 22.5°)
Maximum gauge	345mm
Tile thickness	18mm (nominal)
Cover width	298mm (nominal)
Hanging length	395mm (nominal)
Covering capacity (net)	9.7 slates/m ² (0.43 kN/m ²) at 75mm headlap 10.5 slates/m ² (0.47 kN/m ²) at 100mm headlap
Weight of slating (approx.)	44kg/m ² (0.43 kN/m ²) at 75mm headlap 47.5kg/m ² (0.47 kN/m ²) at 100mm headlap
Battens required (net)	2.9 lin.m/m ² at 75mm headlap 3.1 lin.m/m ² at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Fixing	45mm x 3.35mm slate nails
Fixing clips	Eaves, verge and slate clips
Authority	BS EN 490

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

Laying Duo Edgemere

Duo Edgemere should be laid quarter bond. The required quarter bond pattern is created by the introduction of three-quarter width slates, cut from standard slates on site to form verges in alternate courses.

Riven Edgemere

A thin leading edge interlocking slate with the addition of a riven surface, providing a more natural appearance with variegated look, depth and tone.

Colour availability



Smooth Grey (S)

Key (S) Smooth finish

Technical data	
Size of slate	420mm x 330mm
Minimum pitch*	22.5° (75mm headlap) 17.5° (100mm headlap)
Maximum pitch	90°
Minimum headlap	75mm (22.5° and above) 100mm (below 22.5°)
Maximum gauge	345mm
Tile thickness	18mm (nominal)
Cover width	298mm (nominal)
Hanging length	395mm (nominal)
Covering capacity (net)	9.7 slates/m ² (0.43 kN/m ²) at 75mm headlap 10.5 slates/m ² (0.47 kN/m ²) at 100mm headlap
Weight of slating (approx.)	44kg/m ² (0.43 kN/m ²) at 75mm headlap 47.5kg/m ² (0.47 kN/m ²) at 100mm headlap
Battens required (net)	2.9 lin.m/m ² at 75mm headlap 3.1 lin.m/m ² at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Fixing	45mm x 3.35mm slate nails
Fixing clips	Eaves, verge and slate clips
Authority	BS EN 490

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

Laying Riven Edgemere

Riven Edgemere should be laid broken bond. The required broken bond pattern is created by the introduction of three-quarter width slates, cut from standard slates on site to form verges in alternate courses.

Modern

A flat, smooth, single lap interlocking design, whose appearance is enhanced by the required broken bond laying pattern.


Colour availability



Anthracite (S)



Smooth Grey (S)




Smooth Brown (S)



Old English Dark Red (S)

Key (G) Granular finish (S) Smooth finish



Antique Brown (G)



Mosborough Red (S)

Technical data

Size of tile	420mm x 330mm	
Minimum pitch*	22.5° Smooth (75mm headlap) 17.5° Smooth (100mm headlap)	30° Granular (75mm headlap) 25° Granular (100mm headlap)
Maximum pitch	90°	
Minimum headlap	75mm	
Maximum gauge	345mm	
Tile thickness	30mm (nominal)	
Cover width	292mm (nominal)	
Hanging length	397mm (nominal)	
Covering capacity (net)	9.9 tiles/m ² at 75mm headlap	10.7 tiles/m ² at 100mm headlap
Weight of tiling (approx.)	50kg/m ² (0.49 kN/m ²) at 75mm headlap	54kg/m ² (0.53 kN/m ²) at 100mm headlap
Battens required (net)	2.9 lin.m/m ² at 75mm headlap	3.1 lin.m/m ² at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)	50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Tile nails	50mm x 3.35mm	
Fixing clips	Eaves, verge and tile clips	
Authority	BS EN 490	


* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability

- ✓ A⁺ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

Modern fittings

Available in all colours to match main tiles.

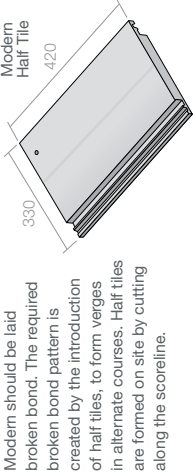

Modern should be laid broken bond. The required broken bond pattern is created by the introduction of half tiles, to form verges in alternate courses. Half tiles are formed on site by cutting along the scoreline.

Note: All measurements in mm.

Duo Modern

A flat, smooth, single lap, interlocking tile with a 'mock bond' joint is enhanced by the required broken bond laying technique.

Colour availability



Old English Dark Red (S)



Smooth Grey (S)

Key (S) Smooth finish

Technical data

Size of tile	420mm x 330mm	
Minimum pitch*	22.5° (75mm headlap) 17.5° (100mm headlap)	
Maximum pitch	90°	
Minimum headlap	75mm	
Maximum gauge	345mm	
Tile thickness	30mm (nominal)	
Cover width	292mm (nominal)	
Hanging length	397mm (nominal)	
Covering capacity (net)	9.9 tiles/m ² at 75mm headlap	10.7 tiles/m ² at 100mm headlap
Weight of tiling (approx.)	50kg/m ² (0.49 kN/m ²) at 75mm headlap	54kg/m ² (0.53 kN/m ²) at 100mm headlap
Battens required (net)	2.9 lin.m/m ² at 75mm headlap	3.1 lin.m/m ² at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)	50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Tile nails	50mm x 3.35mm	
Fixing clips	Eaves, verge and tile clips	
Authority	BS EN 490	

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Laying Duo Modern

Duo Modern should be laid quarter bond. The required quarter bond pattern is created by the introduction of three-quarter width tiles, cut from standard tiles on site to form verges in alternate courses.

Sustainability

- ✓ A⁺ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

Double Roman

A 2000 year old profile with precision-engineered functionality.



Colour availability

Antique Brown (G)

Old English Dark Red (S)

Mosborough Red (S)

Dark Red (G)

Smooth Brown (S)

Smooth Grey (S)

Greystone (G)

Key

(G) Granular finish (S) Smooth finish

Technical data		
Size of tile	420mm x 330mm	
Minimum pitch*	25° Smooth (75mm headlap) 22.5° Smooth (100mm headlap)	30° Granular (75mm headlap)
Maximum pitch	90°	
Minimum headlap	75mm	
Maximum gauge	345mm	
Body thickness	28mm (nominal)	
Profile depth	d > 20mm	
Overall depth	53mm	
Cover width	300mm (nominal)	
Hanging length	397mm (nominal)	
Covering capacity (net)	9.7 tiles/m² at 75mm headlap	10.4 tiles/m² at 100mm headlap
Weight of tiling (approx.)	44kg/m² (0.43 kN/m²) at 75mm headlap	47kg/m² (0.46 kN/m²) at 100mm headlap
Battens required (net)	2.9 lin.m/m² at 75mm headlap	3.1 lin.m/m² at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	65mm x 3.35mm	
Fixing clips	Eaves, verge and tile clips	
Authority	BS EN 490	

Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

Mendip

A double pantile design with elegant flowing lines, providing instant visual appeal.



Colour availability

Antique Brown (G)

Old English Dark Red (S)

Mosborough Red (S)

Dark Red (G)

Smooth Brown (S)

Smooth Grey (S)

Anthracite (S)

Key

(G) Granular finish (S) Smooth finish

Technical data		
Size of tile	420mm x 330mm	
Minimum pitch*	17.5° Smooth (75mm headlap) 15° Smooth (100mm headlap)	30° Granular (75mm headlap) 25° Granular (100mm headlap)
Maximum pitch	90°	
Minimum headlap	75mm	
Maximum gauge	345mm	
Body thickness	27mm (nominal)	
Profile depth	d > 20mm	
Overall depth	59mm	
Cover width	298mm (nominal)	
Hanging length	397mm (nominal)	
Covering capacity (net)	9.7 tiles/m² at 75mm headlap	10.5 tiles/m² at 100mm headlap
Weight of tiling (approx.)	46kg/m² (0.45 kN/m²) at 75mm headlap	49kg/m² (0.48 kN/m²) at 100mm headlap
Battens required (net)	2.9 lin.m/m² at 75mm headlap	3.1 lin.m/m² at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	70mm x 3.35mm	
Fixing clips	Eaves, verge and tile clips	
Authority	BS EN 490	

Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

Extended rafter lengths

Mendip interlocking tiles can now perform at extended rafter lengths as follows:

- 15 - 17.5° pitch with a rafter length up to and including 15m will require a 100mm headlap.
- 17.5° pitch and above with a rafter length up to and including 15m will require a 75mm headlap.

Ludlow Major

Simple, strong lines exploit the interplay between light and shade.




Colour availability



Antique Brown (G)




Mosborough Red (S)



Dark Red (G)

Key (G) Granular finish (S) Smooth finish



Smooth Brown (S)



Smooth Grey (S)



Greystone (G)

Technical data	
Size of tile	420mm x 330mm
Minimum pitch*	25° Smooth (75mm headlap) 22.5° Smooth (100mm headlap)
Maximum pitch	90°
Minimum headlap	75mm
Maximum gauge	345mm
Body thickness	25mm (nominal)
Profile depth	d > 11mm
Cover width	295mm (nominal)
Hanging length	399mm (nominal)
Covering capacity (net)	9.8 tiles/m² at 75mm headlap
Weight of tiling (approx.)	45kg/m² (0.44 kN/m²) at 75mm headlap
Battens required (net)	2.9 lin.m/m² at 75mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Tile nails	55mm x 3.35mm
Fixing clips	Eaves, verge and tile clips
Authority	BS EN 490

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

EcoLogic Ludlow Major

The unique EcoLogic coating applied to the Ludlow Major tile, removes nitrogen oxides and other pollutants from the atmosphere. The tile also includes much higher levels of recycled content.




Colour availability



Nimbus Grey (G)

EcoLogic composition

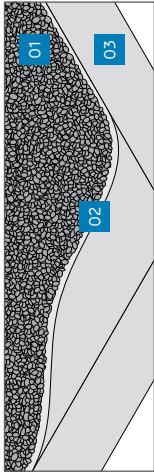

- Key
- 01 Photocatalytic granules stimulated by sunlight to remove NOx
 - 02 Photocatalytic pigmented slurry adhesive
 - 03 Concrete body containing nearly 50% recycled material

Technical data	
Size of tile	420mm x 330mm
Minimum pitch*	30° (75mm headlap)
Maximum pitch	90°
Minimum headlap	75mm
Maximum gauge	345mm
Body thickness	25mm (nominal)
Profile depth	d > 11mm
Cover width	295mm (nominal)
Hanging length	399mm (nominal)
Covering capacity (net)	9.8 tiles/m² at 75mm headlap
Weight of tiling (approx.)	45kg/m² (0.44 kN/m²) at 75mm headlap
Battens required (net)	2.9 lin.m/m² at 75mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Tile nails	55mm x 3.35mm
Fixing clips	Eaves, verge and tile clips
Authority	BS EN 490


* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability


- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement
- ✓ High level of recycled content

Ludlow Plus


Ideal for refurbishment applications, where its smaller format reduces wastage.



Colour availability




Greystone (G)




Smooth Grey (S)

Key (G) Granular finish (S) Smooth finish




Antique Brown (G)



Smooth Brown (S)



Old English Dark Red (S)



Dark Red (G)

Technical data

Size of tile	387mm x 229mm
Minimum pitch*	25° Smooth (75mm headlap) 22.5° Smooth (100mm headlap)
Maximum pitch	90°
Minimum headlap	75mm
Maximum gauge	312mm
Body thickness	25mm (nominal)
Profile depth	d > 11mm
Cover width	204mm (nominal)
Hanging length	361mm (nominal)
Covering capacity (net)	15.7 tiles/m² at 75mm headlap
Weight of tiling (approx.)	47kg/m² (0.48 kN/m²) at 75mm headlap
Battens required (net)	3.2 lin.m/m² at 75mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Tile nails	50mm x 3.35mm
Fixing clips	Eaves, verge and tile clips
Authority	BS EN 490

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability

- ✓ A* rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

Wessex




Designed to shed water efficiently at pitches down to 15°, the Wessex has clean, simple lines with a pleasing minimalist style.



Colour availability



Smooth Brown (S)



Smooth Grey (S)

Key (S) Smooth finish

Technical data

Size of tile	420mm x 330mm
Minimum pitch*	15°
Maximum pitch	44°
Minimum headlap	75mm
Maximum gauge	345mm
Body thickness	29mm (nominal)
Profile depth	d > 20mm
Overall depth	56mm
Cover width	298mm (nominal)
Hanging length	403mm (nominal)
Covering capacity (net)	9.7 tiles/m² at 75mm headlap
Weight of tiling (approx.)	50kg/m² (0.49 kN/m²) at 75mm headlap
Battens required (net)	2.9 lin.m/m² at 75mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Fixing clips	Eaves, verge and tile clips
Authority	BS EN 490

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

Anglia

A single lap interlocking concrete tile with the classic clay pantile profile and a bullnosed leading edge design.

Colour availability



Old English Dark Red (S)



Smooth Grey (S)



Antique Brown (G)

Key (G) Granular finish (S) Smooth finish

Technical data	
Size of tile	387mm x 230mm
Minimum pitch*	30° Smooth (75mm headlap) 25° Smooth (100mm headlap)
Maximum pitch	90°
Minimum headlap	75mm
Maximum gauge	312mm
Tile thickness	30mm (nominal)
Profile depth	d > 20mm
Overall depth	71mm
Cover width	204mm (nominal)
Hanging length	370mm (nominal)
Covering capacity (net)	15.7 tiles/m ² at 75mm headlap
Weight of tiling (approx.)	47kg/m ² (0.46 kN/m ²) at 75mm headlap
Battens required (net)	3.2 lin.m/m ² at 75mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Tile nails	38mm x 3.35mm
Fixing clips	Eaves, verge and tile clips
Authority	BS EN 490

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.


Sustainability

- ✓ A⁺ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

Ashmore

A single lap, interlocking double plain tile, with the engineered precision and ease of installation of an interlocking tile.


Colour availability



Old English Dark Red (S)



Smooth Grey (S)



Smooth Brown (S)

Key (S) Smooth finish


Technical data	
Size of tile	267mm x 333mm
Minimum pitch*	25° (77mm headlap)
Maximum pitch	90°
Minimum headlap	77mm
Maximum gauge	190mm
Tile thickness	16mm (nominal)
Cover width	302mm (nominal)
Hanging length	235mm (nominal)
Covering capacity (net)	17.5 tiles/m ² at 77mm headlap
Weight of tiling (approx.)	48kg/m ² (0.47 kN/m ²) at 77mm headlap
Battens required (net)	5.3 lin.m/m ² at 77mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Tile nails	45mm x 3.35mm
Fixing clips	Eaves, verge and tile clips
Authority	BS EN 490

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Ashmore fittings

Available in all colours to match main tiles.

Ashmore tiles should be laid broken bond. The required broken bond pattern is created by the introduction of three-quarter width tiles in alternate courses. Tile-and-a-half tiles are available for use at hips and valleys.

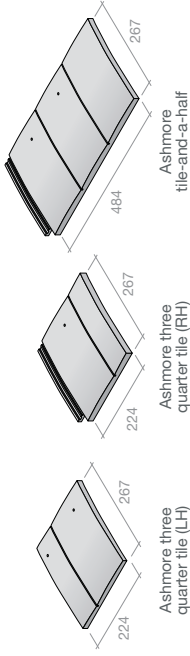

Sustainability


- ✓ A⁺ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

Concrete fittings


Verges, ridges and hips

Available in a range of colours to match main tiles.
Recommended roof pitch may vary depending on product and system used, please contact the Technical Advisory Service.


- † Compatible with Marley Eternit ventilated dry ridge system.
- ‡ Compatible with Marley Eternit dry hip system.
- § Compatible with Marley Eternit Universal HipFast.
- * Compatible with Marley Eternit Universal RidgeFast.




Cloak verge
Modern, Mendip and Double Roman (see page 59)




Modern ridget†
15-55° dry ridge




Modern mono ridge
15-45° bedded




Modern security ridge
15-45° bedded




Segmental ridget‡
15-55° dry ridge




Segmental security ridge
15-50° bedded




Segmental mono block end ridge
15-55° dry ridge




Segmental mono ridget†
15-55° dry ridge




Modern mono block end ridge
15-45° bedded




1/3 round hip tile§
17.5-45° dry ridge




Modern block end ridge*
15-55° dry ridge



Segmental block end ridge*
15-55° dry ridge




125° Angle ridge hip 15-25° Security
125° Angle ridge/hip 15-25°




90° Angle ridge/hip 45-50° bedded
Also available:
Security 90° Angle ridge/hip
45-50°

Also available:
145° Angle ridge hip 15-22.5° Security
145° Angle ridge/hip 15-22.5°



1/2 round baby ridge
15-55°



Pascoll roll baby ridge
15-45°



Ridge vent terminal
15-55° dry ridge



Gas vent terminal
15-55° dry ridge

Also available: **Gas vent ridge for condensing boilers**
Modern ridge 15-55°
Segmental ridge 15-55°

Note: All measurements in mm.

Fixings

Universal HipFast system (with concrete third round hip tiles and Ashmore Old English Dark Red Interlocking tiles), Windsor

SoloFix

Manufactured from Zial[®], an integrated clip and nail that is quick and simple to install.

See page 6 for more information.

Profile	Pack size 500	Pack size 100
Modern	Code No. 30430	Code No. 30440
Ludlow Major/EcoLogic	30430	30440
Ludlow Plus	30430	30440
Edgemere range	30431	30441
Mendip	30432	30442
Wessex	30432	30442
Double Roman	30433	30443
Anglia	30434	30444
Lincoln	30434	30444
Maxima	30433	30443
Melodie	30445	30445

Stainless steel fixings

Description	Code No.	Quantity
Ashmore clip and nail pack	30130	100

Aluminium nail packs

Profile	Code No.	Pack No.	Approx. count
Plain	30348	25	793
Anglia, Lincoln	30349	26	520
Ludlow Plus, Modern, Duo Modern	30350	27	396
Double Roman	30351	28	308
Mendip	30352	29	287
Edgemere range, Ashmore, Melodie, Maxima, Ludlow Major/EcoLogic	30398	31	432
	30371	32	373

Aluminium verge and eaves clip packs

The table below shows the quantities packaged together with the correct sized nail.

Profile	Right hand verge clip & nail pack 50 clips & nails	Left hand verge clip & nail pack 50 clips & nails	Eave clip & nail pack 100 clips & nails
Ludlow Plus	Code No. 30290	Code No. 30290	Code No. 30277
Anglia	30284	30286	30274
Ludlow Major/EcoLogic	30287	30287	30277
Mendip	30288	30287	30276
Double Roman	30289	30290	30275
Wessex	30286	30286	30278
Modern	30290	30290	30273
Duo Modern	30290	30290	30273
Edgemere range	30263	30263	30297
Ashmore*	30263	30263	30297
Lincoln	30284	30286	30452
Maxima	30289	30290†, 30289†	30452*, 30455†
Melodie	30285	30285	30452*, 30455†

* Clips only † For standard tile ‡ For verge tile § Nails only

Fibre cement slate fixings

Description	Colour	Quantity
Copper disc rivets	–	1000
Copper nails	–	1000
60mm x 14 gauge self-sealing screws	Blue/Black	100
Slate hooks for low pitch Birkdale	–	500



Mortar bedded security ridge

Mechanical fixing system for mortar bedded ridge tiles, helping house builders and contractors meet British Standards and NHBC guidelines.

Mortar bedded security ridge kit
(illustrated above) 54365
- 10 No. batten brackets
- 13 No. clamps
- 13 No. 75mm x 4.8mm s/s screws
- 40 No. 25mm x 2.65mm s/s ARS nails

100mm x 4.8mm deep ridge screw pack (for clay half round ridge with profiled tiles)

Watch a quick video on mortar bedded mechanical fixing at marleyeternit.co.uk/securityridge or scan the QR code below



Mortar bedded security hip

Mechanical fixing system for mortar bedded hip tiles, helping house builders and contractors meet British Standards and NHBC guidelines.

Mortar bedded security hip kit
(illustrated above) 54366
- 6 No. batten brackets
- 13 No. clamps
- 13 No. 75mm x 4.8mm s/s screws
- 40 No. 25mm x 2.65mm s/s ARS nails

Tile tail clip pack 43602
Tile head clip pack 43604
100mm x 4.8mm deep ridge screw pack (for clay third round hips with profiled tiles) 70000
Secret cut tile clip pack 43607

Watch a quick video on mortar bedded mechanical fixing at marleyeternit.co.uk/securityhip or scan the QR code below



More about our dry fix systems

Our website contains a wealth of information about dry fix and ventilation solutions, including the Universal range, which not only works with our roof tiles and slates, but those of other manufacturers too: www.marleyeternit.co.uk/dryfix



Dry fix and ventilation



54

* Suitable for Modern only

Universal roofing accessories

Suitable for use with Marley Eternit roofing products and those of other manufacturers.†



UNIVERSAL
10mm/25mm eaves vent

Designed to provide low level ventilation to roof voids in an efficient and unobtrusive manner for roof pitches from 12.5-55°. For all tiles and slates.

Universal 10mm eaves vent system (6m pack) - 6m eaves rafter roll - 10 No. felt support tray - 6 No. strip ventilator	46350
Universal 25mm eaves vent system (6m pack) - 6m eaves rafter roll - 10 No. felt support tray - 6 No. strip ventilator	46351
Comb filler strip	30425
Continuous rafter roll (2 x 6m)	46323
Gutter spacers (20 No.)	46353

Find out more at
marleyeternit.co.uk/eavesvent
or scan the QR code shown




UNIVERSAL
Dry verge

Designed for use with large format interlocking tiles installed at a range of headlaps and rafter pitches from 15-45° (suitable up to 55° subject to ridge system).

Dry verge system 28 No. left hand units 28 No. right hand units Fixing kit (also available)	391* 392* 53930
End caps Modern ridge Segmental ridge Modern mono-ridge	394* 395* 408*
Segmental mono-ridge	409*
Segmental mono-ridge Left hand Right hand	427* 428*
Dry verge refurbishment kit * Suffix with colour code 01 Grey, 03 Brown, 04 Terracotta	53580

Find out more at
marleyeternit.co.uk/dryverge
or scan the QR code shown



UNIVERSAL
HipFast

Simple and rapidly installed ventilated dry hip system, compatible with all tiles and slates up to 45° (suitable up to 60° subject to tile/slate profile and hip tile type).

Universal HipFast system (6m pack) - 6m length hip roll - 6 No. batten brackets - 13 No. hip unions - 2 No. tapered filler units	53400
Fixing material - 24 No. tile head clips - 30 No. tile tail clips	
Hip support trays - 9 No. 715mm	34002
RidgeFast/HipFast Union Packs 100mm x 4.8mm deep ridge screw pack (for clay third round hips with profiled tiles)	53303
Secret cut tile clip pack	43607

Find out more at
marleyeternit.co.uk/hipfast
or scan the QR code shown



UNIVERSAL
RidgeFast

Simple and rapidly installed ventilated dry ridge system providing 5mm continuous ridge ventilation and compatible with all tiles and slates from 15-60° dependent on circumstances*.

Universal RidgeFast system (6m pack) - 6m length ridge roll - 10 No. ridge batten brackets - 13 No. ridge union straps - 13 No. ridge union clamps	53300
RidgeFast roll applicator (optional)	33002
RidgeFast blanking tape (optional)	33001
100mm x 4.8mm deep ridge screw pack (for clay half round ridge with profiled tiles)	70000
RidgeFast/HipFast Union Packs * Contact Technical Advisory Service for more information	53303

Find out more at
marleyeternit.co.uk/ridgefast
or scan the QR code shown



UNIVERSAL
Tile vent

Suitable for roof void ventilation and connection to 110mm soil/mechanical extraction. Compatible with large format interlocking tiles and roof pitches 20° and above.

Universal Tile vent Grey Brown Terracotta	36700 36703 36704
Flexible pipe	39091

Find out more at
marleyeternit.co.uk/tilevent
or scan the QR code shown



UNIVERSAL
GRP dry valley

Mortar free solution suitable for use with concrete interlocking tiles/slates and concrete/clay plain tiles. Suitable on rafter pitches from 17.5-60° and accommodates up to 20° pitch difference either side of valley.

Universal GRP dry valley (3m lengths) low profile high profile	30422 30421
---	----------------

More about our dry fix systems

Our website contains a wealth of information about dry fix and ventilation solutions, including the Universal range, which not only works with our roof tiles and slates, but those of other manufacturers too:

www.marleyeternit.co.uk/dryfix






UNIVERSAL Plain tile vent

Designed for natural, mechanical or soil pipe ventilation. Provides 10,000mm² free area of ventilation and suitable for concrete and clay plain tile roof pitches 22.5° and above†.

Universal plain tile vent	
Grey	45501
Brown	45503
Red	45505
Flexible pipe ID 110mm (sold separately)	39091
Pressure resistance values	
Pa (litres/sec airflow)	15 30 60
Free air area 10,000mm ²	13.6 53.7 21

† Please note minimum pitch of tile will apply.



UNIVERSAL Ridge roll for fibre cement slates

Simple and rapidly installed dry fix system providing 5mm continuous ridge ventilation. Compatible with fibre cement slates and ridges.


Ridge roll	
Fibre cement ventilated dry ridge (illustrated above)	33010
Duo pitch ridge	(no code)
Stop end for duo pitch ridge	(no code)
Mono ridge	(no code)
Stop end for mono ridge	(no code)
Ventilated ridge roll	(no code)



Slate continuous verge trim

Fibre cement slate dry verge provides a mechanically fixed, durable, maintenance free verge solution for rafter pitches up to 55° with fibre cement slates and natural slates.

Slate verge trim	
Fibre cement slates (3 metre)	42206



Ashmore and plain tile continuous dry verge

Ashmore and plain tile continuous dry verge provides a strong, weathertight and maintenance-free verge that meets the requirements of BS 5534. The system is fast and simple to install and offers sleek, uninterrupted verges without the need for mortar.

Ashmore and plain tile dry verge	
Verge section (3 metre)	38501
Fixing kit	38510




Cloak verge systems

Provides a mechanically fixed, durable, maintenance free verge solution. Suitable up to 45° for Mendip, Modern, Double Roman tiles and 55° for plain tiles.

Mendip cloak verge (illustrated above)	
Left hand	245
Right hand	246
Mendip half tile	147
Mendip fixing kit	54252
Double Roman cloak verge	
Left hand	265
Right hand	266
Double Roman half tile	102
Double Roman fixing kit	54252
Concrete plain tile cloak verge	
Left hand	249
Right hand	250
Segmental block end ridge	
Left hand	189
Right hand	190
Modern cloak verge	
Left hand	371
Right hand	370
Modern cloak verge half tile	372
Modern fixing kit	37300
Modern block end ridge	
Left hand	374
Modern mono block end ridge	
Left hand	375
Right hand	376
Clay plain tile cloak verge (no code)	

Available in all colours to match main tiles.



Edgemere dry verge system

Compatible with Edgemere, installed at a range of headlaps and rafter pitches from 17.5-45° (suitable up to 55° when used with the 'steep pitch ridge batten section', see Dry ridge system).

Verge units	
Left hand	381*
Right hand	382*
Edgemere dry verge fixing kit	53830
End caps	
Edgemere ridge	384*
Modern mono-ridge	
Left hand	408*
Right hand	409*
Dry verge refurbishment kit	53580

* Suffix with colour code 01 Grey, 03 Brown



More about our dry fix systems

Our website contains a wealth of information about dry fix and ventilation solutions, including the Universal range, which not only works with our roof tiles and slates, but those of other manufacturers too:

www.marleyeternit.co.uk/dryfix





Ventilated dry hip system

Suitable for all concrete tiles when used in conjunction with Third round or Modern hip tiles for roof pitches 15-45°.

Batten sections	
Low profile	43300
High profile	43400

Fixing kits

Low profile	54360
High profile	54361

Hip tail clip pack

	43602
--	-------

Ridge unions

Modern ridge union	4140*
Third round hip union	4350*


Apex caps

Modern hip apex cap	(15-24°) 4381*
	(25-35°) 4382*
	(36-45°) 4383*
Third round hip apex cap	(15-24°) 4371*
	(25-35°) 4372*
	(36-45°) 4373*

Block end hip tiles

Third round block end hip tile	291
Modern block end hip tile	292

* Suffix with colour code 01 Grey, 03 Brown, 04 Terracotta



GRP Slate valley system

The GRP Valley for large format tiles and Slate GRP Dry Valley for fibre cement slates are both suitable for roof pitches from 22.5° to 45°.

GRP valley for fibre cement slates	30578
------------------------------------	-------



Ventilated dry ridge system

Mechanically fixed, weathertight and mortar free solution providing 5mm continuous ridge ventilation. Suitable for concrete tiles and fibre cement slates when used on roof pitches up to 55°**.

Batten sections	
Low profile	41101
High profile	41201
Steep pitch (low profile)	41102
Steep pitch (high profile)	41202

Ridge unions

Segmental ridge union	413*
Modern ridge union	414*
Modern/segmental adaptor ridge union	420*

Fixing Kits

Concrete tiles & slates fixing kit	41000
------------------------------------	-------

Filler units†

Double Roman - vented	42105
Plain, Modern, Duo Modern, Edgemere - vented	41501
Double lap slates - vented	41703
Ludlow Major/EcoLogic - vented	41601
Ludlow Plus - vented	41508
Mendip - vented	41701
Wessex - vented	41901
Anglia - vented	41506
Dry ridge set out gauge	41001

Apex caps

Segmental ridge junction	439*
Modern ridge junction	440*

* Suffix with colour code 01 Grey, 03 Brown, 04 Terracotta
 ** For roof pitches over 35°, speak to the Marley Eternit Technical Advisory Service
 † Where non-vented dry ridge is required, use Blanking Tape (2 x 2m, code 33001)



Ventilated dry mono ridge system

Mechanically fixed, weathertight and mortar free solution providing 5mm continuous ridge ventilation. Suitable for concrete tiles and fibre cement slates when used on roof pitches up to 55°.

Batten sections	
Low profile	41101
High profile	41201
Steep pitch (low profile)	41102
Steep pitch (high profile)	41202

Ridge unions

Segmental mono-ridge union	423*
----------------------------	------

Fixing Kits

Concrete tiles & slates fixing kit	41000
------------------------------------	-------

Filler units†

Double Roman - vented	42105
Plain, Modern, Duo Modern, Edgemere - vented	41501
Double lap slates - vented	41703
Ludlow Major/EcoLogic - vented	41601
Ludlow Plus - vented	41508
Mendip - vented	41701
Wessex - vented	41901
Anglia - vented	41506
Dry ridge set out gauge	41001

Apex caps

Top abutment support strip	42505
Top abutment fixing kit	41000

* Suffix with colour code 01 Grey, 03 Brown, 04 Terracotta
 † Where non-vented dry ridge is required, use Blanking Tape (2 x 2m, code 33001)



Ridge vent terminals

Suitable for natural soil, or mechanical ventilation. Provides high level ventilation for concrete tiles (9,500mm² free area), clay plain tiles or fibre cement slates (10,000mm² free area).

Ridge vent terminal

Illustrated above – for natural ventilation of the roof void apex and connection to mechanical ventilation systems.

For concrete tiles	198
--------------------	-----

Gas vent ridge terminal for condensing boilers

Segmental	254
Modern	255

Gas vent ridge terminal (concrete tiles)

For connection to gas appliances of rated input of 60 Kw max. only (not suitable for gas condensing boilers or oil fired boilers).

With extension piece	256
Gasket set (spare)	30346

Plumbers accessory pack

	39090
--	-------

For full product codes, please speak to Customer Services on 08705 626400.



Tile vent terminals

Available in a wide range of colours and finishes, provides for high/low level roof space ventilation. Suitable for natural soil, or mechanical ventilation (except Ashmore)†.

Terminals (with spigot)

Mendip (illustrated above)	294
Edgemere	259
Modern	295
Wessex	296
Ludlow Major/EcoLogic	297
Double Roman	298

Flexible pipe

	39091
--	-------

Ventilation roof tiles (with catchment tray)

Ashmore	263
---------	-----

Available in all colours to match main tiles.
 † Minimum pitch of tile will apply.

Dry fix and ventilation



Contour in-line vents

Discreet high performance vent terminals for high/low level roof space ventilation. Suitable for soil and mechanical ventilation. Minimum roof pitch 22.5° (except Plain tiles 35°).

Contour tile vents	
Mendip	452*
Ashmore	450*
Plain	455*
Edgemere	465*
Modern	451*
Wessex	459*
Ludlow Major/EcoLogic	456*
Double Roman	453*
Ludlow Plus	457*
Anglia	460*

Flexible pipe 39091

* Suffix with colour code 01 Grey, 03 Brown, 05 Red



Clay in-line vent

Real clay tile slips provide visual integration on roof slope and 7,500mm² free area of ventilation.

Clay in-line tile ventilator	(no code)
Clay in-line tile adaptor	(no code)
Flexible pipe	39091



Fibre cement slate in-line vent

Provides visual integration on roof slope and 10,500mm² free area of ventilation.

Fibre cement in-line slate ventilator	(no code)
(illustrated above)	
Flexible pipe	39091

Complementary products


Cedral Lap, Rye, East Sussex

Avant-garde or traditional, the Vertigo range gives free rein to your creativity and brings a new dimension to design with fibre cement slates. The small, slate-like panel size perfectly adapts to the contours of the building and provides a second, protective skin which enables visual and performance continuity between roof and facade, creating a complete and beautiful building envelope.




Colours and systems


For new build as well as renovation work, the Vertigo range of fibre cement slates offers an excellent aesthetic and protective solution. Existing buildings with irregularities in walls can be corrected (using brackets) at the same time as being radically embellished and given real added value.




White




Sable




Terracotta




Flame Grey




Flame Brown



Taupe



Zinc Grey




Anthracite



Traditional

Natural slate appearance with slate hooks.




No drilling



Broken bond

Staggered panels giving close boarded effect.



Pre-holed for broken bond installation



Panel

Regular bond panels giving geometric precision.



Pre-holed for regular bond installation


Profiled sheeting

We are the only manufacturer of fibre cement within the UK. We have been producing profiled sheeting for over 90 years and offer a wide range of corrosion-resistant and low maintenance systems across a wide range of sectors: commercial, residential, educational and agricultural.



Painted colour range


Experience gained over many years has shown that the standard Marley Eternit colour range will meet the majority of design requirements in both rural and urban areas. All the colours have been chosen for their ability to harmonise with the most commonly used building materials – brick, slate, stone, concrete and timber.

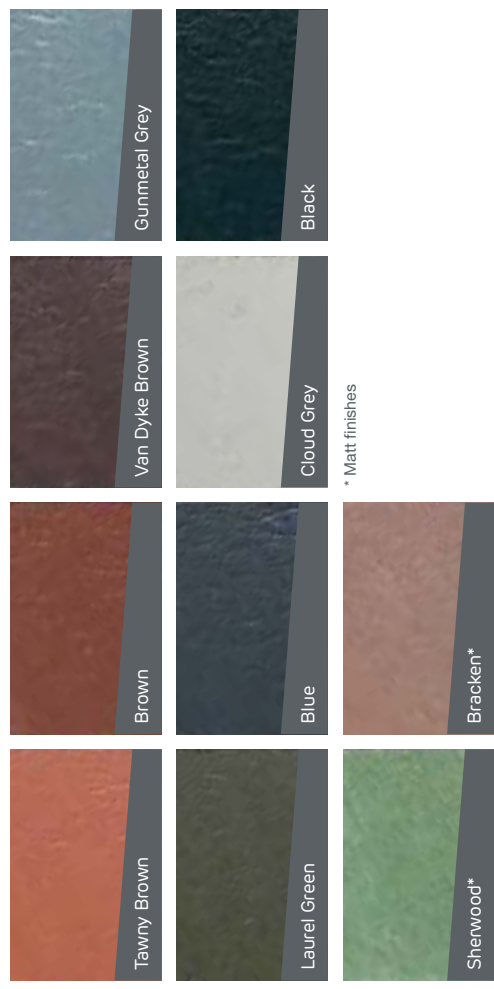

* Matt finishes

Natural Grey

Natural Grey is the standard unpainted finish for Profile 6 and Profile 3.



Farmscape Anthracite

Anthracite sheets have a pigmented surface layer. Together with subtle variations in tone inherent in any natural cementitious product, the appearance will blend with almost any landscape from the day the building is erected.



Cedral Lap

Cedral Lap is the ideal, low maintenance, alternative to traditional timber or PVCu weatherboarding. Cedral is designed so the planks overlap to create a traditional clapperboard aesthetic.


* Available as a complete system solution with complementary trims, soffits and fascia boards.




Cedral Lap colour range

All painted colours are available in a smooth finish (subject to extended lead times).


Earth tones

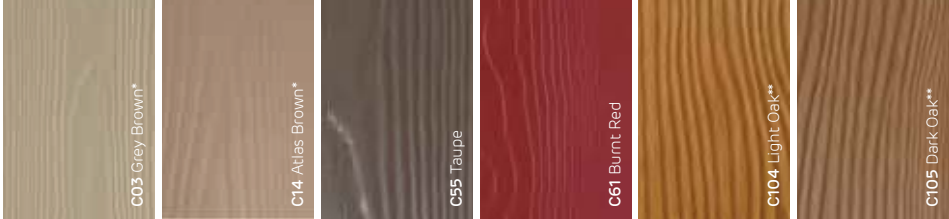


Forest tones

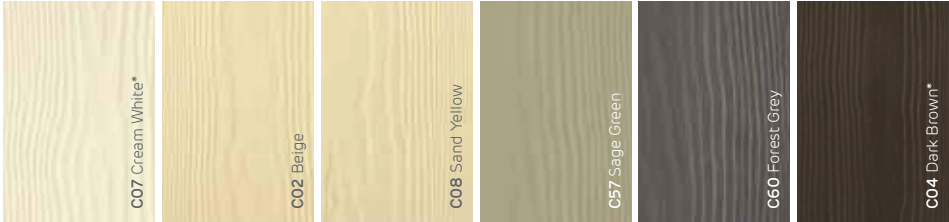

Mineral tones

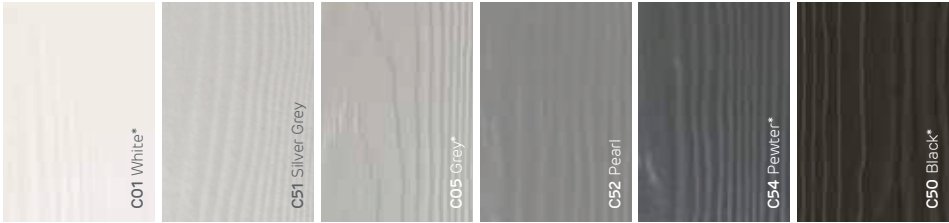

Ocean tones

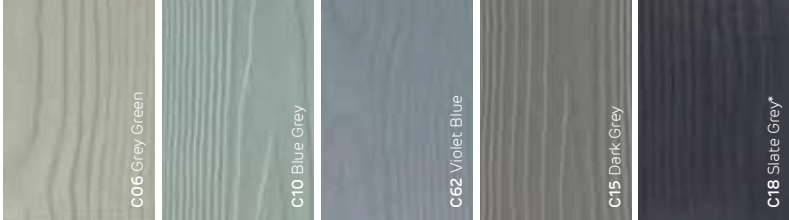

* Complementary Cedral Board available in these colours
** Woodstain finish

Cedral Click

Cedral Click* is the UK's first and only fibre cement flush fitting tongue and groove cladding board. With the same performance benefits as traditional Cedral Lap, Cedral Click planks are fitted together creating a striking modern and contemporary facade.

* Available as a complete system solution with complementary trims, soffits and fascia boards.




Cedral Click colour range

All painted colours are available in a smooth finish (subject to extended lead times).


Earth tones



C03 Grey Brown*



C14 Atlas Brown*




C55 Taupe



C61 Burnt Red


Forest tones



C07 Cream White*



C02 Beige



C08 Sand Yellow



C57 Sage Green



C60 Forest Grey




C04 Dark Brown*

Mineral tones




C01 White*



C51 Silver Grey



C05 Grey*



C52 Pearl




C54 Pewter*



C50 Black*


Ocean tones



C06 Grey Green



C10 Blue Grey



C62 Violet Blue



C15 Dark Grey



C18 Slate Grey*

* Complementary Cedral Board available in these colours

This publication is based on the latest data available at the time of printing. Due to product changes, improvements and other factors, the Company reserves the right to change the design, specification, price and availability of its products without notice. The Company does not accept any liability for errors or omissions in this publication. The photographs shown in this document should not necessarily be taken as recommendations and relevant Standards and Codes of Practice for guidance. The photography shown in this document should not necessarily be taken as recommendations of good practice. The printing process restricts the exact representation of colours. For true colour reference, please request product samples.

Call
Email
Or visit



01283 722588
info@marleyeternit.co.uk
www.marleyeternit.co.uk

Marley Eternit Lichfield Road Branston Burton upon Trent DE14 3HD



an **etex** company