

GENERAL CONSTRUCTION NOTES

Check position and line of existing drainage and services allow for protection from any additional loading

Concrete foundations 25Kn strength 600mm wide founded minimum 1000mm min depth below ex GL (800mm depth of concrete) and as agreed with the building control department.

Blocks to DPC to be 100mm dense concrete aggregate in inner skin with facing bricks in exposed areas externally built in 1:3 mortar Cavity filled with concrete to within 150mm below DPC.

DPC to be Hyload 150mm above finished ground level to full width of leaves and bonded to existing. Inner leaves bonded to 1200 G DPM in floor slab.

External walls to be constructed of Facing bricks or block & render to match existing . Internal block skin to be celcon leca or similar 7Kn strength lightweight blocks.

With projecting lintols as detailed and rendered finish to match existing. Cladding to upper walls to be white eternit shi lap on battens and felt fixed in accordance with manufactureres Instructions

100mm Cavity to include 100mm full fill insulation batts with 250mm long stainless steel ties at 450mm centres vertically and 750mm centres horizontally with additional ties at 300mm centres at openings. Window reveals and cills to include Thermabate or similar 100mm cavity closures.

Lintols over to be Catnic combined filled with insulation quilt or steel beams to engineers design calculations.

Walls internally to be stud & plasterboard or load bearing block with lightweight plaster . Stud walls to be 75 x 50 or 100 X 50 framing with plasterboard both sides and filled with Rockwool quilt.

Roof timbers to be sawn softwood treated & regularised. Windows framed UPVC and built in with frame cramps and vertical DPC cavity closures and double glazed.

New windows to have low E glass with 24mm sealed DG units and openings min 1/20th of floor area and trickle vents min 10,000mm2. Glazed with sealed units U value 1.6W/m2 with thermal breaks .

Door Glass to be safety glazing to comply with BS 6206 and part N. with double glazed sealed units as above. Doors to be min 750mm clear opening size. Folding door and patio doors to have level access. Glazing to doors to have a U value of 1.8W/m2.

All escape windows to are to be not less than 0.33M2 opening area with a minimum height and width of 450mm and situated not more than 1100mm above finished floor level.

Ceiling to be 15mm plasterboard with artex plastic finish.

Lateral restraint straps to be built in to brick walls at 1200mm centres and nailed to rafters

Electrical installation to be carried out to IEE standards and by a qualified installer in accordance with part P of the Building Regulations and a certificate issued on completion..

Mains powered interlinked smoke alarmes incorporating standby power supply to be installed in each circulation space on both floors


All new Radiator valves to be thermostatic control valves.

Kitchen to be provided with mechanical ventilation to achieve an extraction rate of 60 litres / second. Bathrooms 15 litres/sec. Utility room 30 litres/sec. WC 6 litres/sec.

Sanitary pipework shall be installed in accordance with the requirements of Building Regulation part H1 . Minimum trap sizes shall be as table 2 . Waste pipes are to be 32mm diameter.

Energy efficient lighting to be provided in accordance with L1

Underground foul and surface water drainage to be Hepseal Plastidrain or similar 110mm dia with flexible joints laid to falls and bedded and surrounded in pea gravel with concrete protection over as building regulation requirements.

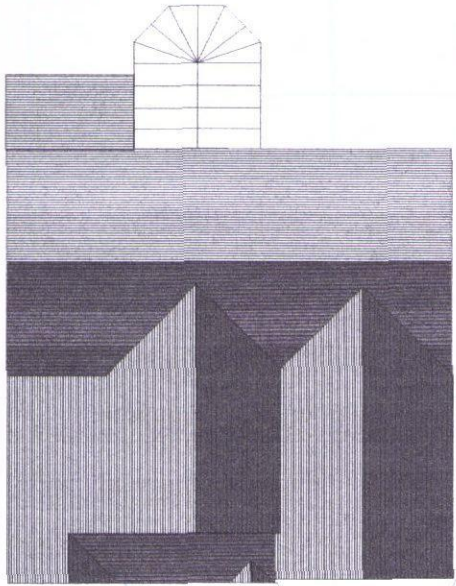

SW drainage to new soakaway minimum 5.5m from building

ROOF PLAN PROPOSED

Ref IDB/02/2015/00

Scale 1:200

Rev.


PROPOSED ALTERATIONS

for

IAN & DEBOROUGH BURROUGHS

17 LANGBROOK CLOSE

HAVANT PO9 1RS

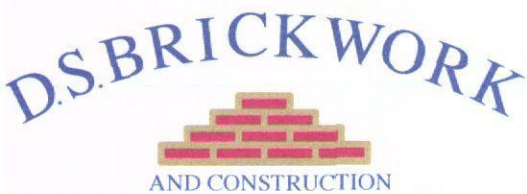

Office 01329 282526
Mob 07846 577800

Notes.
1) All external materials and detailing to match the existing house.
2) All dimensions to be checked on site before manufacture of any components.
3) Extent of existing house shown in grey hatching on floor plans. New walls shown coloured red & blue hatching
4) These drawings has been prepared for a planning application only
Further details will be required for a Building Regulation Approval