Legend

Existing trees and hedges to be retained and protected during construction. To be reviewed inline with Barrell tree Consultancy arboriculture information. Proposed planting within root protection areas to be hand dug

Existing trees and hedges to be removed during construction. To be reviewed inline with Barrell tree Consultancy arboricultural information.

Proposed tree planting within soft landscape. See detail on sheet 1 and 2

Proposed specimen shrub planting to receive 75mm bark mulch after planting operations

Proposed hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row. To be maintained at 1m height

Proposed shrub planting to receive 75mm bark mulch after planting operations

Proposed mix shrub planting to be planted in groups of 5-7no. of each species and as above

Proposed grass areas to receive good quality amenity grass turves laid in line with good horticultural practices

Proposed grassland areas, to be seeded with WFG20 Eco species rich lawn grass seed mix as supplied by Germinal Seeds and sown at 15 grams per msq, or similar

Proposed safety surfacing to be grass matta as supplied by matta products and seeded in line with good horticultural practices. To be laid inline with critical fall heights and inline with suppliers recommendations

Cut lines

Proposed 1.2m high bow top fencing in black, to be anti-trap. LAP to receive two outwardly opening self closing gates in contrasting colour. To receive a second gate to make a double lockable maintenance access gate as required

As supplied by Jackson's fencing or similar

Play area to be installed inline with BS EN1176, BS EN1177 and critical fall heights. To be installed inline with suppliers recommendations. refer to drawing for equipment specification.

Play area to receive a sign outling the use of facility, management responsibility, emergency contact details and no dogs allowed

Ecological enhancements

Proposed location of hedgehog hole within the base of the fence to be 130mm x 130mm

Proposed location of bat box to be 2F as supplied by Schwegler or similar

Proposed location of bird box to be 1B as supplied by Schwegler or similar

Refer to Sheet 3 for Plant Schedule

Tree Pit Detail: Soft Landscape

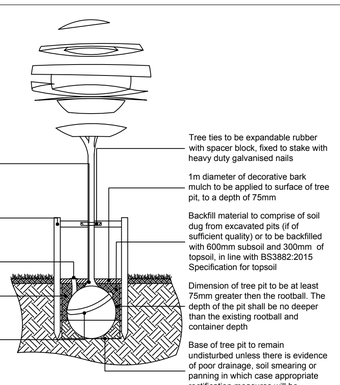

Components as supplied from GreenBlue Urban or similar

SPECIFICATION
All works generally, to comply with the written Soft Landscape Specification.

NOTES:
DO NOT SCALE FROM DRAWING
NOT FOR CONSTRUCTION, FOR PLANNING PURPOSES ONLY

Rev	Date	Details	Drawn

ACD ENVIRONMENTAL
HEAD OFFICE
Rodbourne Rail Business Centre, Grange Lane, Malmesbury, SN16 0ES
Tel: 01666 825646

Suite 8 & 9, Courtyard House, Mill Lane, Godalming, GU7 1EY
Tel: 01483 425714

Suite 6, Crescent House, Yonge Close, Eastleigh, SO50 9SX
Tel: 02382 026300

Suite 50, Space Business Centre Gloucester, Quedgeley, Gloucester, GL2 4AL
Tel: 01452 887260

Suite CO3B, 1010 Cambourne Business Park, Cambourne, CB23 6DP
Tel: 01223 598598

email: mail@acdenv.co.uk
www.acdenvironmental.co.uk

PERSIMMON
Together, we make a home

scheme: Land East of Castle Avenue, Havant
client: Persimmon South Coast
drawing: Landscape Proposals
date: October 2018
scale: 1:200@A1
drawing no: PERSC22164 11 Sheet 2 of 3
drawn: AD checked: JS

Copyright of ACD Environmental Ltd. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted. 2011. Copyright of this plan remains with ACD until all fees have been paid in full.