


PLANT SCHEDULE

Tree Number	Abbreviation	Species	Specification	Density
2No	AGRI14	Acer griseum 14	FHS 14-16cm girth clear stem RH 3m high	Counted
2No	ACEQ14	Acer campestre 'Streetwise' 14	14-16 RB	Counted
2No	ACEQ14	Acer platanoides Emerald Queen 14	CG FHS 14-16cm girth clear stem	Counted
2No	PRUN12	Prunus avium Plena 12	FHS 12-14cm girth clear stem RB	Counted
3No	W16	Fraxinus excelsior Westhof's Glorie 16	FHS 16-18cm RB	Counted
1No	LIQ114	Liquidambar styraciflua 14	14-16 girth RB	Counted
1No	POMM5.5	Prunus Accolade M/S2.5	FHS 2.5-3.0m high multi-stem 3 break RB	Counted
1No	QR14	Quercus robur 14	FHS 14-16cm RB	Counted
1No	BPI16	Betula pendula 16	FHS 16-18cm RB	Counted

Shrub Number	Abbreviation	Species	Specification	Density
45No	ILEX3 dbl	Ilex aquifolium 3 dbl	3L CG 40-50cm fhhd	3/m ²
14No	PLC3	Prunus laurocerasus 'Otto Luyken' 3	30-40 3L	4/m ²
50No	VIB3	Viburnum davidii 3	30-40 3L	4/m ²
50No	HEB3	Hebe 'Marjorie' 3	30-40 3L	4/m ²
58No	HEA3	Hebe albertiana 3	25-30 3L	4/m ²
25No	HEB3	Hebe 'Nicholas Blush' 3	30-40cm 3L CG bushy	4/m ²
94No	KRM-br	Crataegus monogyna br	1+1 25-50 BR	2/m ²
140No	ILQ-p9	Ilex aquifolium p9	30-40 p9	2/m ²
94No	LV-br	Lagunaria vulgaris br	1+1 30-40 BR	2/m ²
94No	PRS-br	Prunus spinosa br	1+1 30-40 BR	2/m ²
45No	LAXM3	Laxia bacata 3	40-60 3L bushy	4/m ²
36No	MAHME3	Mahonia x media 'Charity' 3	3L CG bushy	3/m ²
31No	SPR3	Spiraea japonica Candlelight 3	30-40 3L	4/m ²
32No	LAVM3	Lavandula munstead 3	3L CG 30-40cm high bushy	2/m ²
20No	YUBE3	Yucca Bright Edge 3	30-40 3L	4/m ²
10No	SPAR3	Spiraea x Arguta 3	3L CG bushy	4/m ²
49No	GEN3	Genist tinctoria 'Royal Gold' 3	3L CG bushy 30-40cm	4/m ²
67No	PHI3	Phoradendron tenax 'Yellow Wave' 3	3L CG min. 15 breaks	4/m ²
12No	HEB3	Hebe rakaiensis 3	25-30 3L	4/m ²
24No	ARF3	Arundinaria fortunei 3	CG 3L 40-60	4/m ²
10No	CYS3	Cytisus x kewensis 3	3L CG min. 15 breaks	4/m ²
13No	ROS3	Rosmarinus offi. 'Miss Jessop's Upright' 3	3L CG min. 15 breaks	4/m ²
22No	BER3	Berberis thunbergii 'Red Chief' 3	3L CG bushy min 0.6 high	3/m ²
12No	SYL2	Symphoricarpos 'Hancock' 2	40-60 2L	2/m ²
191No	ILEX3 dbl	Ilex aquifolium 3 dbl	3L CG 40-50cm fhhd	3/m ²
17No	PRUN3	Prunus lusitanica 'Myrtifolia' 3	3L CG bushy	3/m ²
8No	EUO3	Euonymus fortunei 'Silver Queen' 5	3L CG 30-40cm high bushy min. 10 breaks	4/m ²
44No	FAG1+3dbl	Fagus sylvatica 1+3 dbl	1+3 double spaced stock 1.2-1.5m high double row	0.3Ctr Double Staggered at 0.45m offset
2No	PTP50	Phormium tenax 'Purpureum' 50	120-150 50L 20 breaks	Counted
1No	PHO20	Phormium tenax 'Variegatum' 20	20L CG 40-60cm high min 20 breaks	Counted

Herbaceous Number	Abbreviation	Species	Specification	Density
10No	SPAR3	Spiraea arundinacea 3	3L CG 30 breaks	8/m ²
51No	GERSP 3	Geranium 'Spinners' 3	3L CG	8/m ²
21No	HELIC3	Helictotrichon sempervirens 3	3L CG min 40 breaks	4/m ²
2No	SPAR3	Spiraea tenuissima 3	CG 3L	4/m ²
11No	MZ3	Miscanthus sinensis 'Zebrinus' 3	CG 3L	4/m ²
40No	HELIC3	Helictotrichon sempervirens 3	3L CG min 40 breaks	4/m ²

Climber Number	Abbreviation	Species	Specification	Density
2No	FJAS 10	Trachelospermum jasminoides 10	100mm 1.1m	Counted

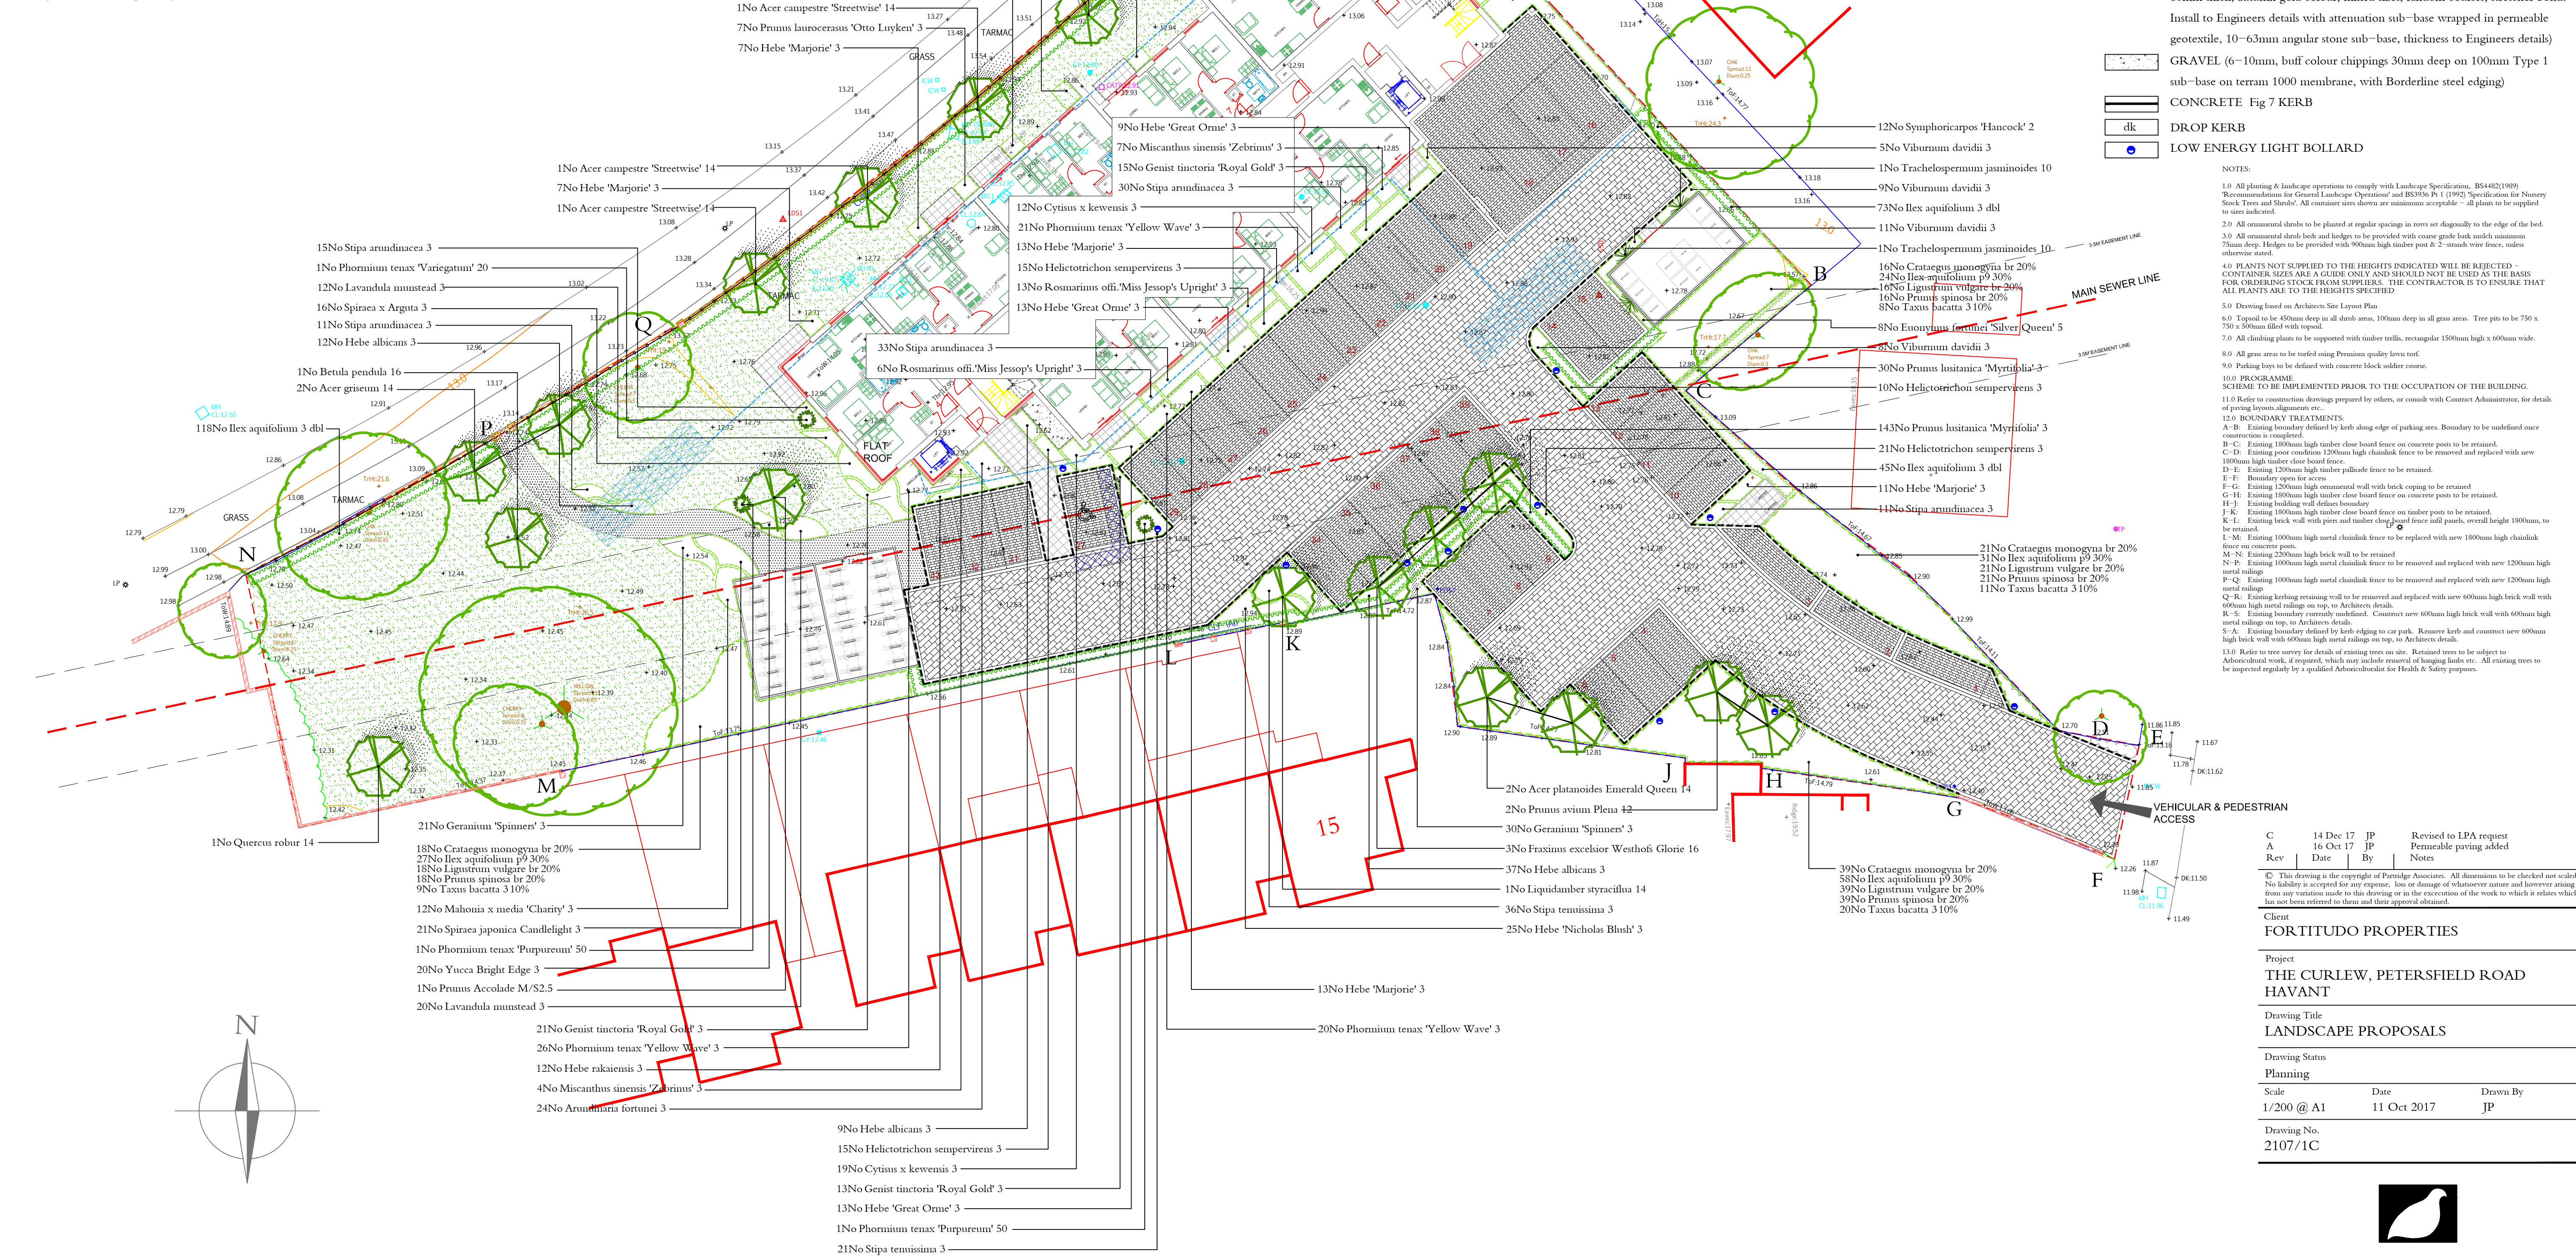

LEGEND

EXISTING FEATURES

- TREE TO BE RETAINED (Refer to Arboricultural Report for details of protection and tree works)
- SPOT HEIGHT

PROPOSED FEATURES

- DECIDUOUS TREE
- ORNAMENTAL SHRUBS
- CLIMBING PLANT (see Notes)
- ACCENT/SPECIMEN PLANT
- HEDGE
- GRASS
- 1200mm HIGH METAL RAILINGS
- 600mm HIGH BRICK WALL WITH 600mm METAL RAILINGS ON TOP (with piers, all to Architects details)
- TARMAC (to Engineers specification)
- CONCRETE SLAB PAVING (Marshalls Saxon, 450x450mm, buff colour)
- PERMEABLE CONCRETE BLOCK PAVING (Brett Paving Alpha Flow, 80mm thick, charcoal colour, mixed sizes, random courses, stretcher bond. Install to Engineers details with attenuation sub-base wrapped in permeable geotextile, 10-63mm angular stone sub-base, thickness to Engineers details)
- PERMEABLE CONCRETE BLOCK PAVING (Brett Paving Alpha Flow, 80mm thick, autumn gold colour, mixed sizes, random courses, stretcher bond. Install to Engineers details with attenuation sub-base wrapped in permeable geotextile, 10-63mm angular stone sub-base, thickness to Engineers details)
- GRAVEL (6-10mm, buff colour chippings 30mm deep on 100mm Type 1 sub-base on terram 1000 membrane, with Borderline steel edging)
- CONCRETE Fig 7 KERB
- DROP KERB
- LOW ENERGY LIGHT BOLLARD

NOTES:

- 1.0 All planting & landscape operations to comply with Landscape Specification, BS4482:1989 'Recommendations for General Landscape Operations' and BS3066 Pt 1 (1992) 'Specification for Nursery Stock Trees and Shrubs'. All container sizes shown are minimum acceptable - all plants to be supplied to sizes indicated.
- 2.0 All ornamental shrubs to be planted at regular spacings in rows set diagonally to the edge of the bed.
- 3.0 All ornamental shrub beds and hedges to be provided with coarse grade bark mulch minimum 75mm deep. Hedges to be provided with 900mm high timber post & rail - strands wire fence, unless otherwise stated.
- 4.0 PLANTS NOT SUPPLIED TO THE HEIGHTS INDICATED WILL BE REJECTED - CONTAINER SIZES ARE A GUIDE ONLY AND SHOULD NOT BE USED AS THE BASIS FOR ORDERING STOCK FROM SUPPLIERS. THE CONTRACTOR IS TO ENSURE THAT ALL PLANTS ARE TO THE HEIGHTS SPECIFIED.
- 5.0 Drawing based on Architects Site Layout Plan.
- 6.0 Topsoil to be 450mm deep in all shrub areas, 100mm deep in all grass areas. Tree pits to be 750 x 750 x 300mm filled with topsoil.
- 7.0 All clashing plants to be supported with timber trellis, rectangular 1500mm high x 600mm wide.
- 8.0 All grass areas to be turfed using Premium quality lawn turf.
- 9.0 Parking bays to be defined with concrete block soldier course.
- 10.0 PROGRAMME SCHEME TO BE IMPLEMENTED PRIOR TO THE OCCUPATION OF THE BUILDING.
- 11.0 Refer to construction drawings prepared by others, or consult with Contract Administrator, for details of paving layout, drainage etc.
- 12.0 BOUNDARY TREATMENTS:
 - A-B: Existing boundary defined by kerb along edge of parking area. Boundary to be undefined once construction is completed.
 - B-C: Existing 1800mm high timber close board fence on concrete posts to be retained.
 - C-D: Existing poor condition 1200mm high chainlink fence to be removed and replaced with new 1800mm high timber close board fence.
 - D-E: Existing 1200mm high timber pallade fence to be retained.
 - E-F: Boundary open for access.
 - F-G: Existing 1200mm high ornamental wall with brick coping to be retained.
 - G-H: Existing 1800mm high timber close board fence on concrete posts to be retained.
 - H-J: Existing building wall defines boundary.
 - J-K: Existing 1800mm high timber close board fence on timber posts to be retained.
 - K-L: Existing brick wall with post and timber close board fence with panels, overall height 1800mm, to be retained.
 - L-M: Existing 1000mm high metal chainlink fence to be replaced with new 1800mm high chainlink fence on concrete posts.
 - M-N: Existing 2200mm high brick wall to be retained.
 - N-P: Existing 1000mm high metal chainlink fence to be removed and replaced with new 1200mm high metal railings.
 - P-Q: Existing 1000mm high metal chainlink fence to be removed and replaced with new 1200mm high metal railings.
 - Q-R: Existing kerbing retaining wall to be removed and replaced with new 600mm high brick wall with 600mm high metal railings on top, to Architects details.
 - R-S: Existing boundary currently undefined. Construct new 600mm high brick wall with 600mm high metal railings on top, to Architects details.
 - S-A: Existing boundary defined by kerb adjoining to car park. Remove kerb and construct new 600mm high brick wall with 600mm high metal railings on top, to Architects details.
- 13.0 Refer to tree survey for details of existing trees on site. Retained trees to be subject to Arboricultural work, if required, which may include removal of hanging limbs etc. All existing trees to be inspected regularly by a qualified Arboriculturalist for Health & Safety purposes.

C	14 Dec 17	JP	Revised to LPA request
A	16 Oct 17	JP	Permeable paving added
Rev	Date	By	Notes

© This drawing is the copyright of Partridge Associates. All dimensions to be checked not scaled. No liability is accepted for any expense, loss or damage of whatsoever nature and however arising from any variation made to this drawing or in the execution of the work to which it relates which has not been referred to them and their approval obtained.

Client	FORTITUDO PROPERTIES
Project	THE CURLEW, PETERSFIELD ROAD HAVANT
Drawing Title	LANDSCAPE PROPOSALS
Drawing Status	Planning
Scale	1/200 @ A1
Date	11 Oct 2017
Drawn By	JP
Drawing No.	2107/1C



PARTRIDGE ASSOCIATES
Landscape Consultancy
2 Silverta Court New Street Lymington Hampshire SO41 9BQ
Tel: 01590 674699 E-mail: info@partridgeassociates.org.uk