

6.2.3.3 New temporary ground protection should be capable of supporting any traffic entering or using the site without being distorted or causing compaction of underlying soil.

NOTE The ground protection might comprise one of the following:

- a) for pedestrian movements only, a single thickness of scaffold boards placed either on top of a driven scaffold frame, so as to form a suspended walkway, or on top of a compression-resistant layer (e.g. 100 mm depth of woodchip), laid onto a geotextile membrane;

	
project	Bedhampton Cricket Pavilion Biddury Mead
client	Bedhampton Cricket Club
title	Tree Retention & Protection Plan
dwg	BJH 03/04
scale	1:250 @ A4
date	January 2015
job	0763
drawn by	bjh
Bernie Harverson M.Arb. 3 Foxcombe Cottages • South Haring • West Sussex • GU31 5JL Tel: 01700 865297 • mob: 07875 520881 • email: bernie.harverson@virgin.net • VAT Reg No: 281 3158 16	


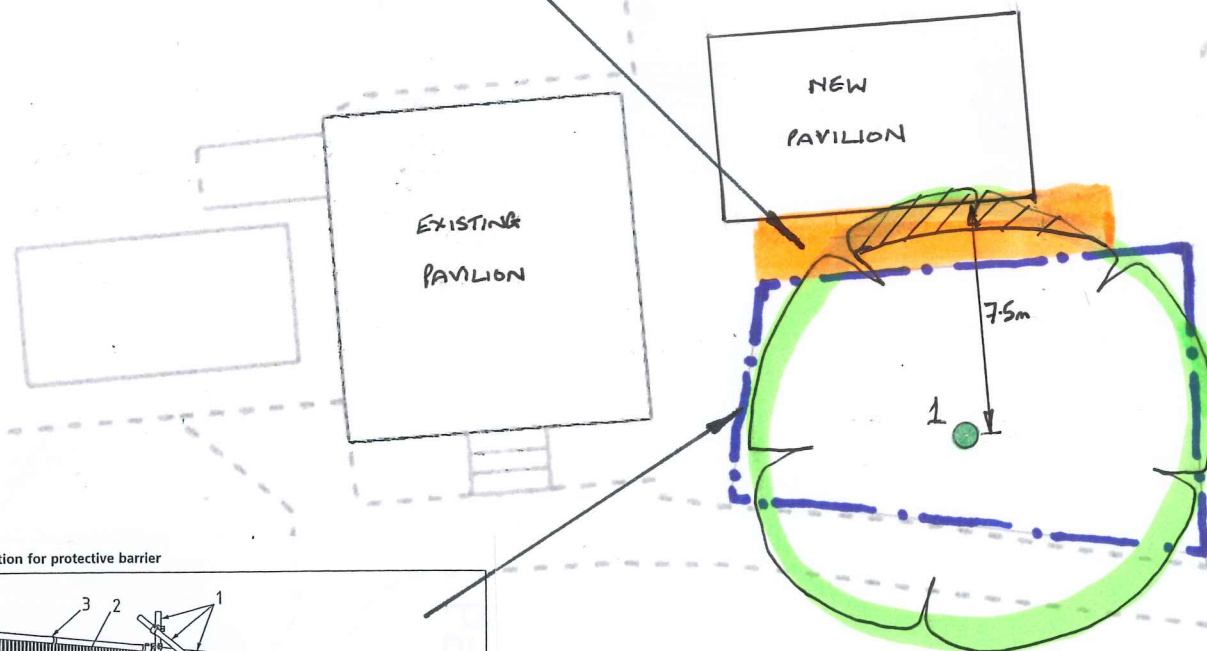


Figure 2 Default specification for protective barrier



Key:

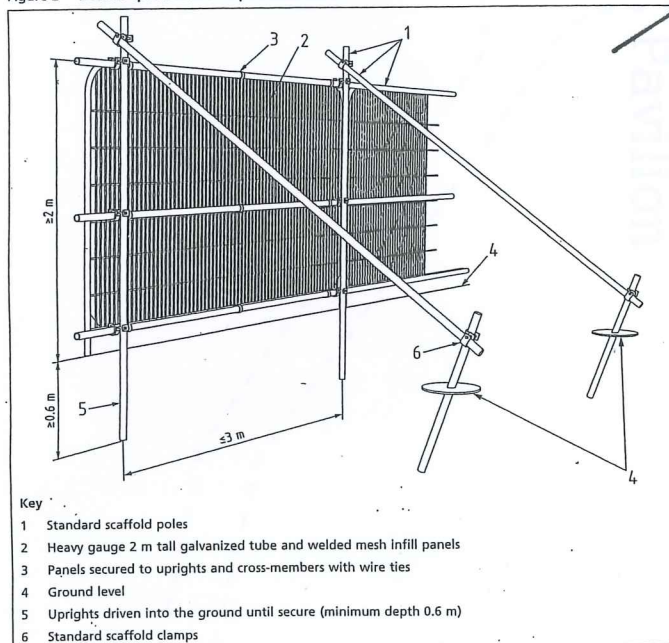

= Tree to be retained and fully protected during development.



= The setting out positions for the Protective Fencing in accordance with BS5837:2012 recommendations – Section 6.2



= This shaded area will need to be covered with ground protection in accordance with BS5837:2012 – Section 6.2.3.3 a) to facilitate scaffolding erection and pedestrian movements around the build.



= This indicates the alignment of the facilitation pruning that will be required to clear from the building line and allow for standard construction techniques