


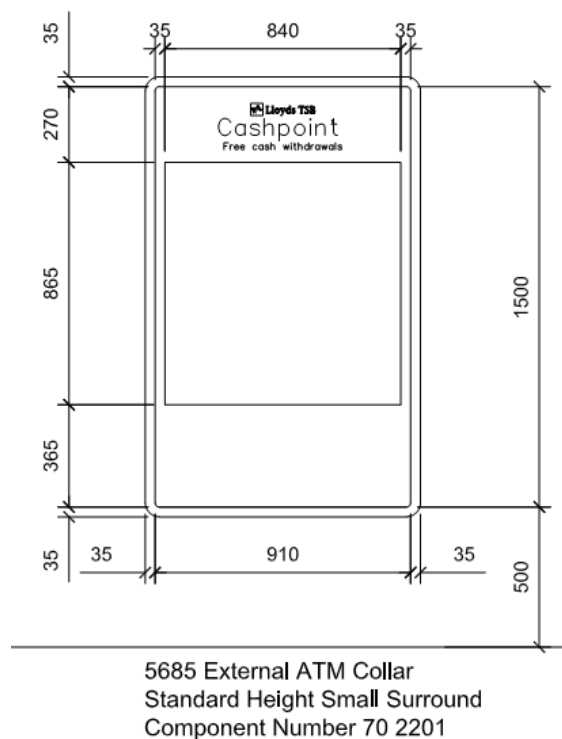

General Specification

External Collars

- Back Panel Surround to be 3mm aluminium powder coated green RAL 6029 60% gloss
- Face panel to be 10mm clear acrylic with 3mm chamfered & polished edges to outside and around aperture. Rear applied graphic to be opaque (light Blocking) blue RAL 5002 with white translucent text and full colour logo.
- Illumination to be green LED halo illumination with diffuser between face panel and surround & LED back lighting to text on face panel. Overall depth of frame to be 35mm.
- Power to be supplied from within premises alongside the foot of the ATM

External ATM surround 002