


Key:

-  = Trees which will be retained and fully protected.
-  = Trees and hedges which cannot be retained with this layout.
-  = The setting out positions for the Protective Fencing in accordance with BS5837:2012 recommendations – Section 6.2
-  = The Stage 2 position for the entrenched Protective Fencing once the main dwelling has been completed.
-  = This area is to be a 'No Dig' zone formed using porous load bearing materials.
-  = Ground protection measures in accordance with BS5837:2012 recommendations – Section 6.2.3.3a)

Figure 2 Default specification for protective barrier

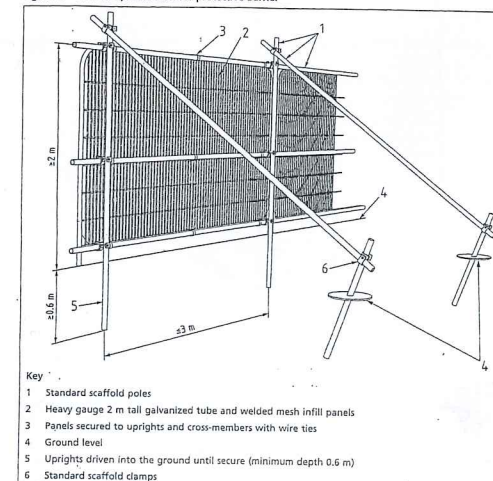

project	26 Bound Lane Hayling island Hampshire
client	Mr & Mrs A Johns
title	Tree Protection Plan
dwg	BJH 03/04
scale	1:250 @ A3
date	December 2017
job	0918
drawn by	bjh
3 Foxcombe Cottages - South Harting - West Sussex - GU31 5PL 01730 825297 07875 520881 bernieharverson@gmail.com	

6.2.3.3 New temporary ground protection should be capable of supporting any traffic entering or using the site without being distorted or causing compaction of underlying soil.

NOTE The ground protection might comprise one of the following:

a) for pedestrian movements only, a single thickness of scaffold boards placed either on top of a driven scaffold frame, so as to form a suspended walkway, or on top of a compression-resistant layer (e.g. 100 mm depth of woodchip), laid onto a geotextile membrane;

Block Plan 1:250

REV	DATE	AMENDMENT	DRAWN

hd
architects

Helyer Davies Architects Ltd
1 The Old Flour Mill,
Emsworth, PO10 7BT
01243 370 715

www.hdarchitects.co.uk mail@hdarchitects.co.uk

CLIENT
Mr Tony Johns

PROJECT
26 Bound Lane
Hayling Island
Hampshire
PO11 9HU

DRAWING
Site Plan

SCALE
1:250 at A3

DATE December 2017

DRAWN JF

DRAWING NUMBER

17001-156

REVISION

C