

PP_01538242

RAFT HARO STAND



SPECIFICATION.



CONCRETE: - 1:2:4 - 20 mm MIX WITH A MAXIMUM SLUMP OF 30 mm.

MESH: - IF SITE CONDITIONS REQUIRE THE USE OF MESH USE A142/5 mm IN SHEET SIZE 3.0 m x 2 m.

DPM: - 1000g/HEAVY DUTY POLYTHENE.

HARDCORE: - CLEAN BROKEN BRICK, QUARRY WASTE OR OTHER APPROVED MATERIAL.

ALL MATERIALS USED MUST BE BEST QUALITY AND ALL WORKMANSHIP OF THE HIGHEST STANDARD. ALL MUST CONFIRM WITH THE RELEVANT CURRENT BRITISH STANDARDS AND CODES OF PRACTICE.

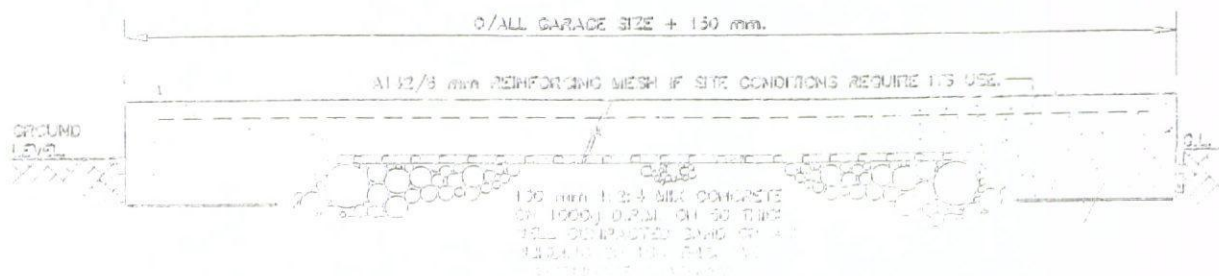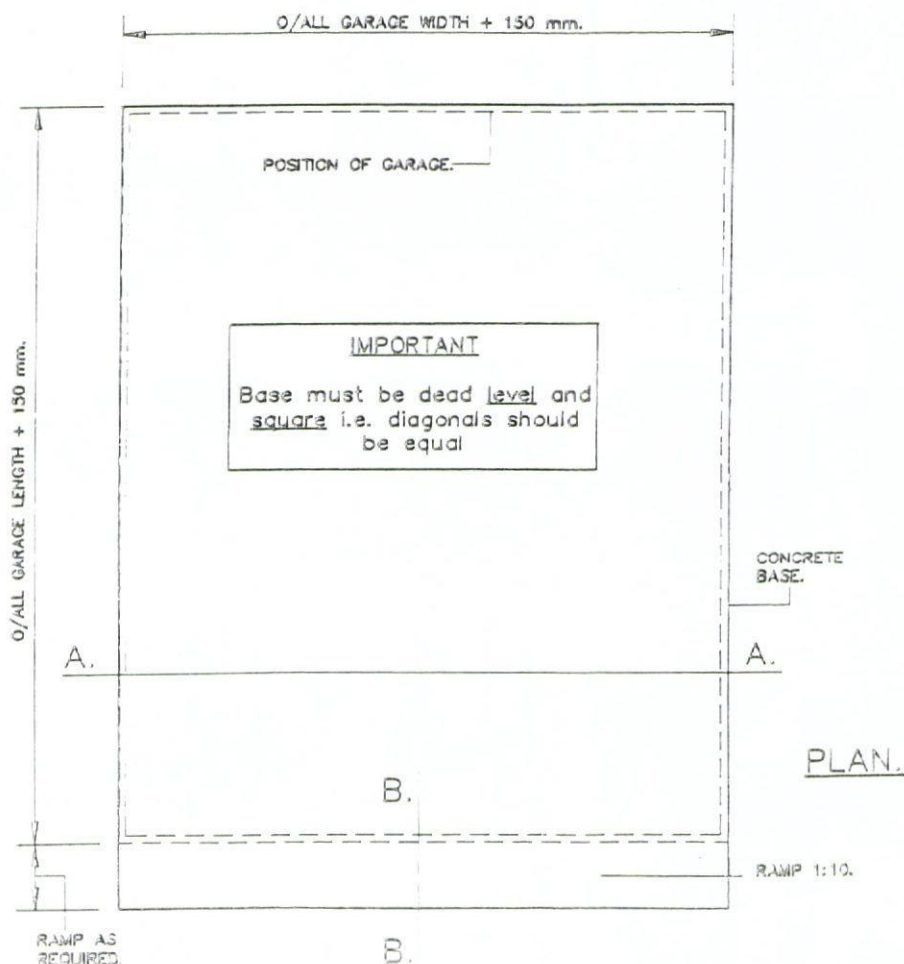

SECTION A-A STANDARD BASE
RAFT CONSTRUCTION

100 x 100 mm EDGE BEAM
MINIMUM SIZE.
CHECK IN SITU TO
SUIT SITE CONDITIONS
AND/OR LOCAL
AUTHORITY APPROVAL