


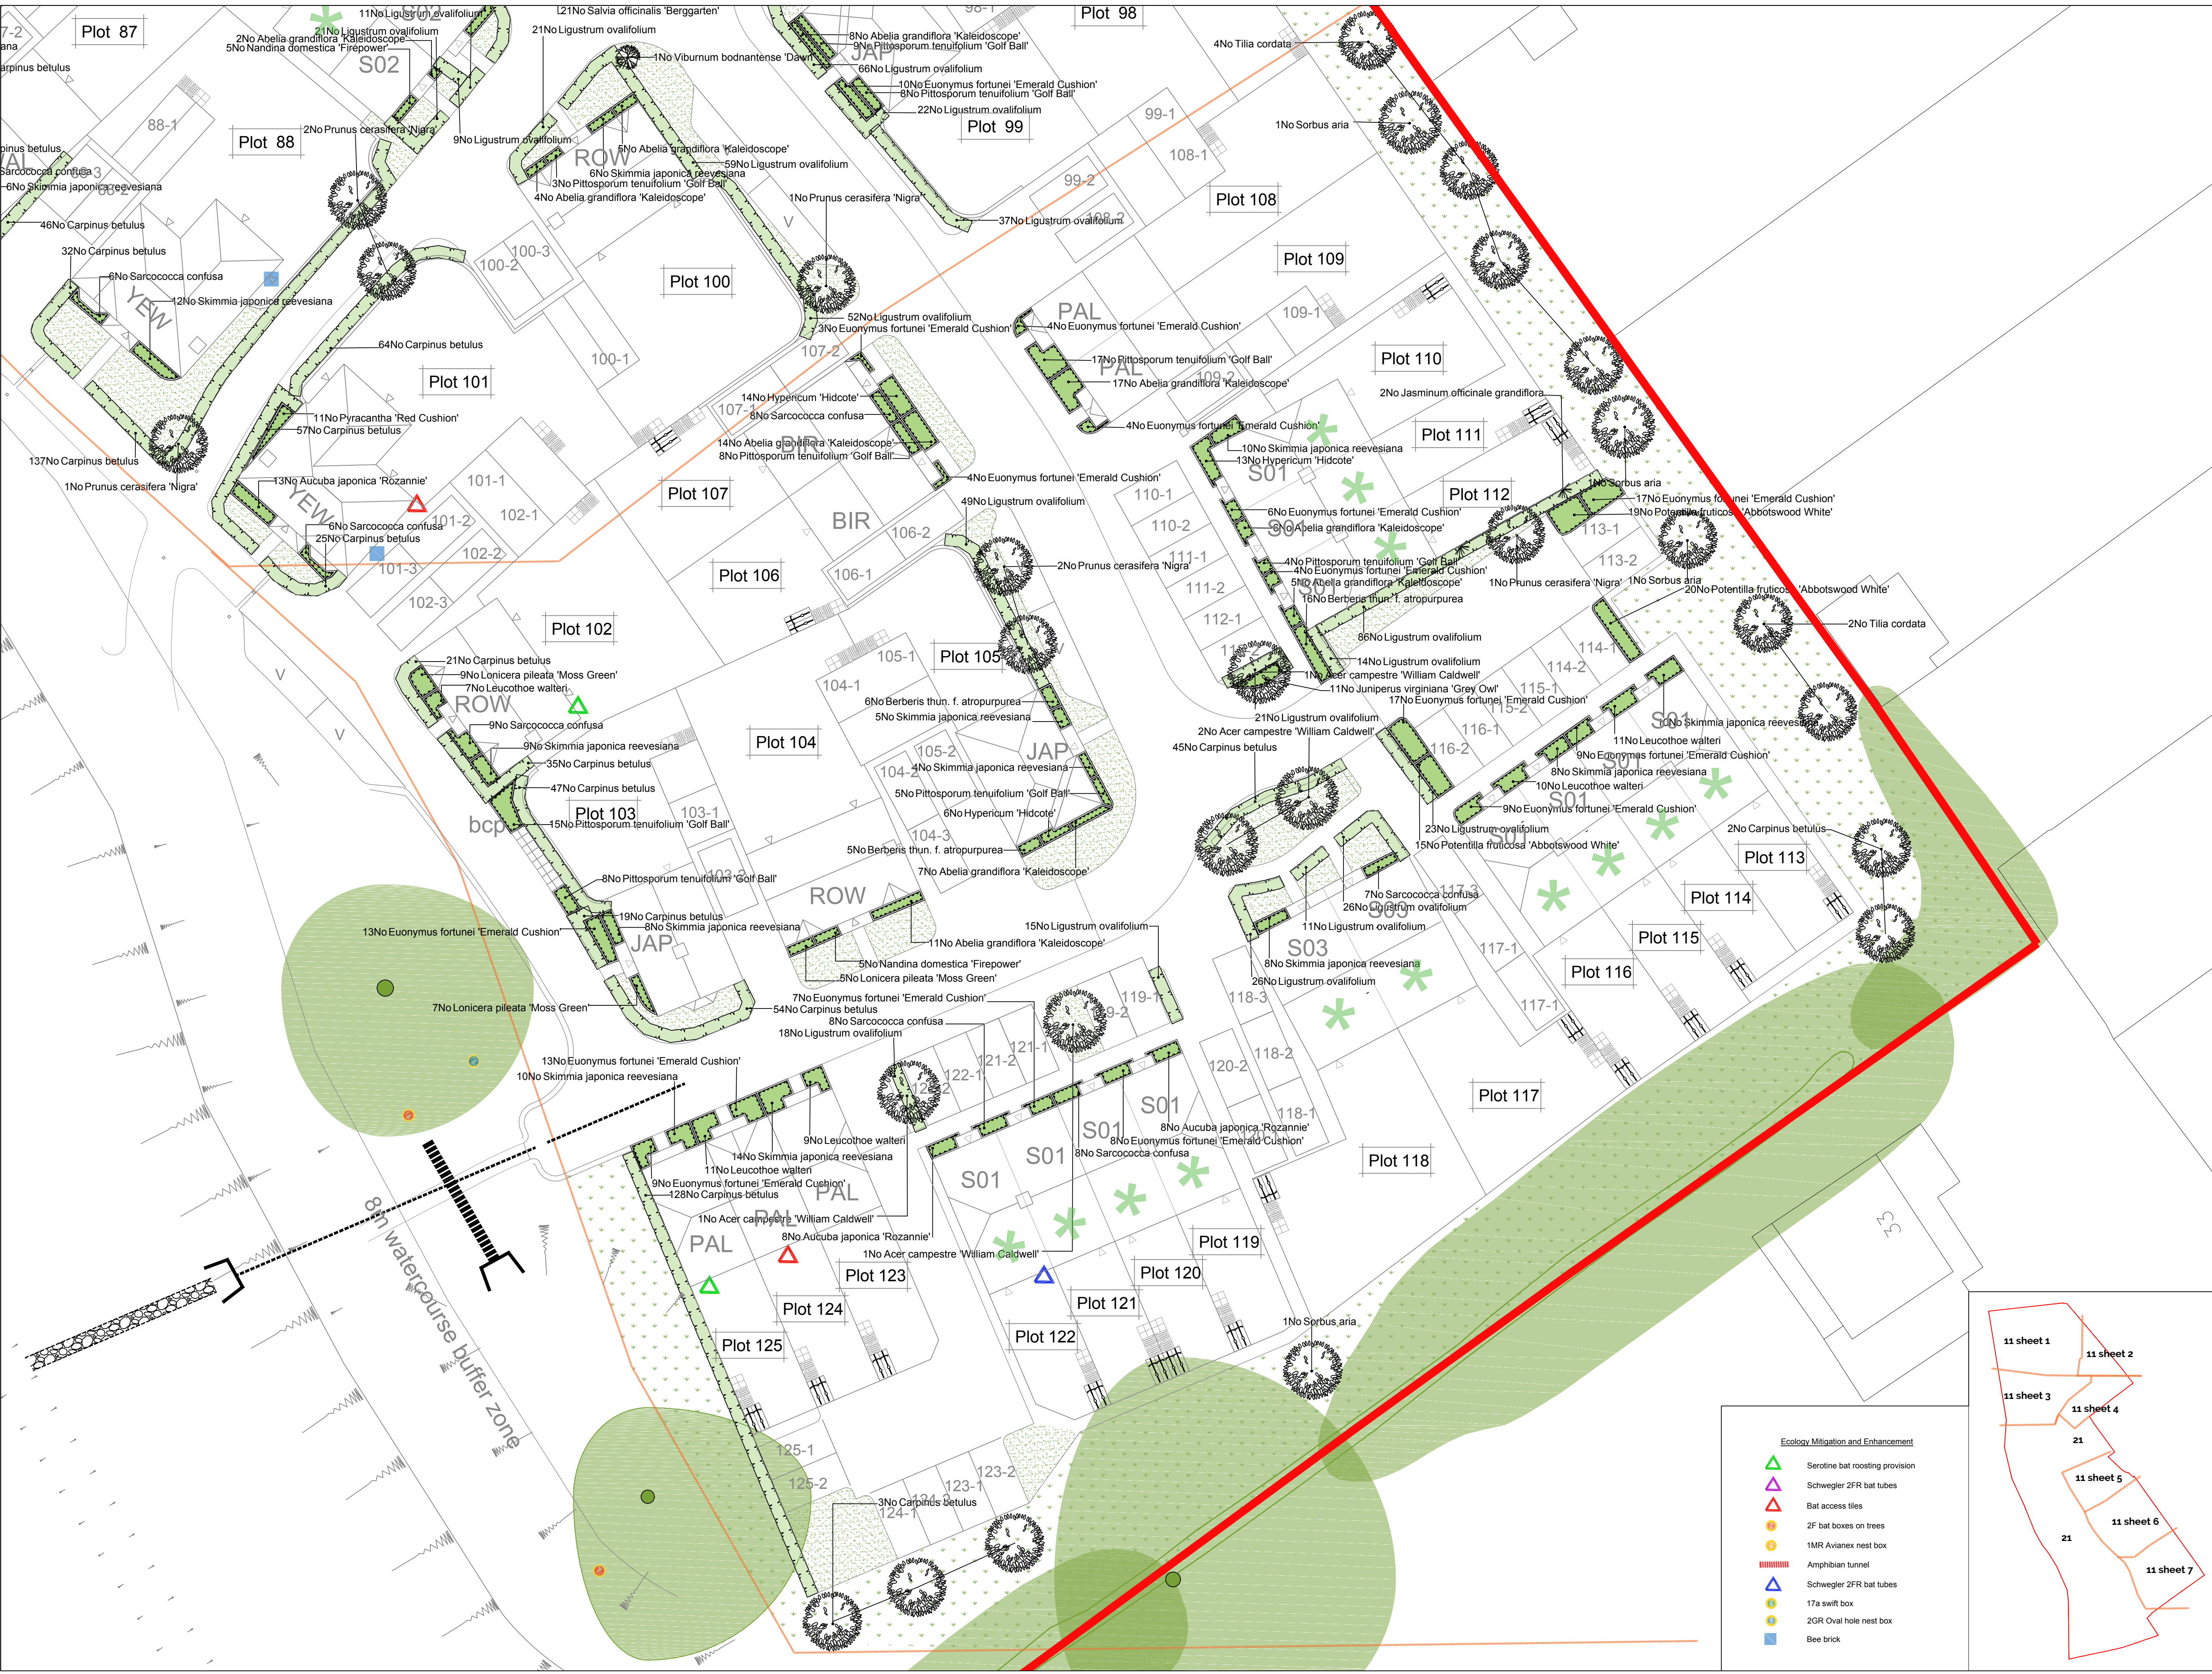

SPECIFICATION
All works generally, to comply with the written Soft Landscape Specification.

NOTE: DO NOT SCALE FROM DRAWING

- Legend**
- Existing trees to be retained and protected during construction
 - Proposed tree planting within soft landscape. See detail on sheet 4
 - Proposed specimen shrub planting to receive short angular staking on half standards with expandable tree ties. Irrigation tubing to root system of *Amelanchier*, *Laurus* and *Osmanthus* specimens as required
 - Proposed climbing plants to be trained up adjacent wall/ fence/pergola with galvanised wires and hook set 250mm apart with support canes removed prior to planting
 - Proposed *Carpinus* (hornbeam) hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row. To be maintained at 1m height
 - Proposed mixed native hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row. To be maintained at 1m height and 1.8m height adjacent to site boundaries
 - Proposed shrub planting to receive 75mm bark mulch after planting operations
 - Proposed decorative mix shrub planting to be planted in groups of 5-7no. of each species and as above
 - Proposed grass areas to receive good quality amenity grass turves laid in line with good horticultural practices
 - Proposed grassland areas, to be seeded with EM4 grass seed mix as supplied by Emorsgate and sown at 5 grams per msq, or similar and approved
 - Tree root barrier, ReRoot 1000 from GreenBlue Urban or similar
 - Proposed narrow areas of angular shippings for top dressing. Laid over a weed proof membrane.
 - Proposed area to be planted with a bulb mix of fritillaria, galanthus, narcissus, allium
 - Cycle route signage bollard indicating shared footpath and cycle route
 - Cut lines

Planting Schedule on Sheet 2

