SPECIFICATION
All works generally, to comply with the written Soft Landscape Specification.

NOTE: DO NOT SCALE FROM DRAWING

Legend

- Existing trees to be retained and protected during construction
- Proposed tree planting within soft landscape. See detail on sheet 1
- Proposed specimen shrub planting to receive short angular staking on half standards with expandable tree ties.
- Proposed climbing plants to be trained up adjacent wall/ fence/pergola with galvanised wires and hook set 250mm apart with support canes removed prior to planting
- Proposed *Buxus* (box) hedge planting to be planted in a single row at 300mm centres
- Proposed hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row. To be maintained at 1m height
- Proposed mixed native hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row. To be maintained at 1m height and 1.8m height adjacent to site boundaries
- Proposed shrub planting to receive 75mm bark mulch after planting operations
- Proposed decorative mix shrub planting to be planted in groups of 5-7no. of each species and as above
- Proposed grass areas to receive good quality amenity grass turves laid in line with good horticultural practices
- Existing grassland to be retained and undisturbed as a tall grassland including in the reptile receptor area. Maximum of 1 cuts per year to create a natural meadow.
- Where disturbed during construction, re-seed with EM1 Basic General Purpose Meadow Mixture as supplied by Emorsgate and sown at 4 grams per msq, or similar and approved
- Amenity areas of species rich turf to be laid in line with good horticultural practices, unless existing grassland areas are in good condition and can be retained.
- Proposed SUDs areas, to be seeded with Pond Edge Mixture (EP1) seed mix as supplied by Emersgate and sown at 4 grams per msq, or similar and approved
- Hoggin footpath with timber edging. No dig construction where required. To be installed following engineer's details.
- Proposed bulb planting mix to include *Galanthus nivalis, Hyacinthoides non-scripta, Narcissus 'WP Milner'* and *Eranthis cilicica* at 25no/m²
- Location of dog bin
- Cut lines
- Temporary timber post and wire fence
- Proposed narrow areas of angular chippings for top dressing. Laid over a weed proof membrane.

Planting Schedule on Sheet 3

For Lap and Trim Trail details see drawing BDWS20345 21A

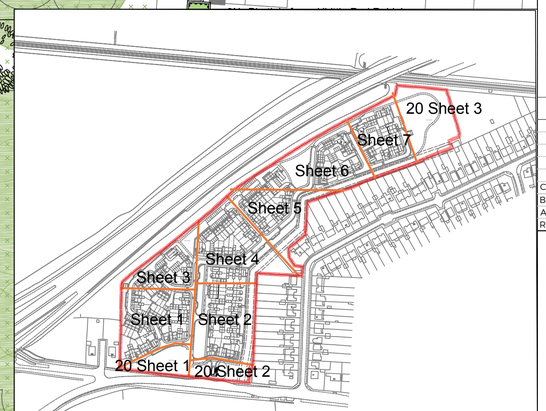

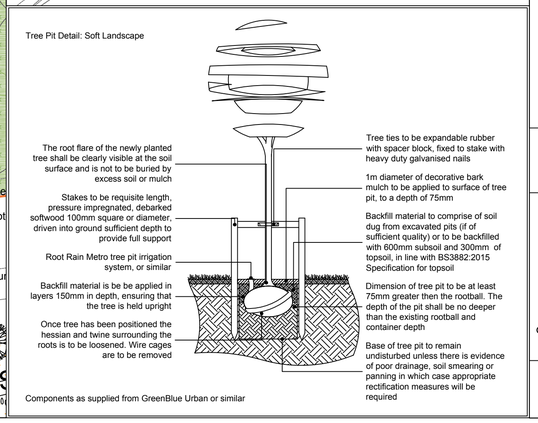

Rev	Date	Details	Drawn
C	19.05.17	Comments	JD
B	17.05.17	LA Comments	JD
A	01.03.17	Revised Layout	JD

ACD ENVIRONMENTAL

HEAD OFFICE
Rodbourne Rail Business Centre, Grange Lane, Malmesbury, SN16 0ES
Tel: 01666 825646

Courtyard House, Mill Lane, Godalming, GU7 1EY
Tel: 01483 425714

Suite 6, Crescent House, Yonge Close, Eastleigh, SO50 9SX
Tel: 02382 026300

9 Brownlow Road, Cambridge, CB4 3NG
Tel: 07825 868654

email: mail@acdenv.co.uk
www.acdenvironmental.co.uk

BARRATT HOMES

scheme: Land at Havant Road, Emsworth
client: Barratt Homes
drawing: Landscape Proposals
date: July 2016
scale: 1:200@A1
drawing no: BDWS20345 11C Sheet 1
drawn: JD checked: AE

Copyright of ACD Environmental Ltd. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted. 2011. Copyright of this plan remains with ACD until all fees have been paid in full.