

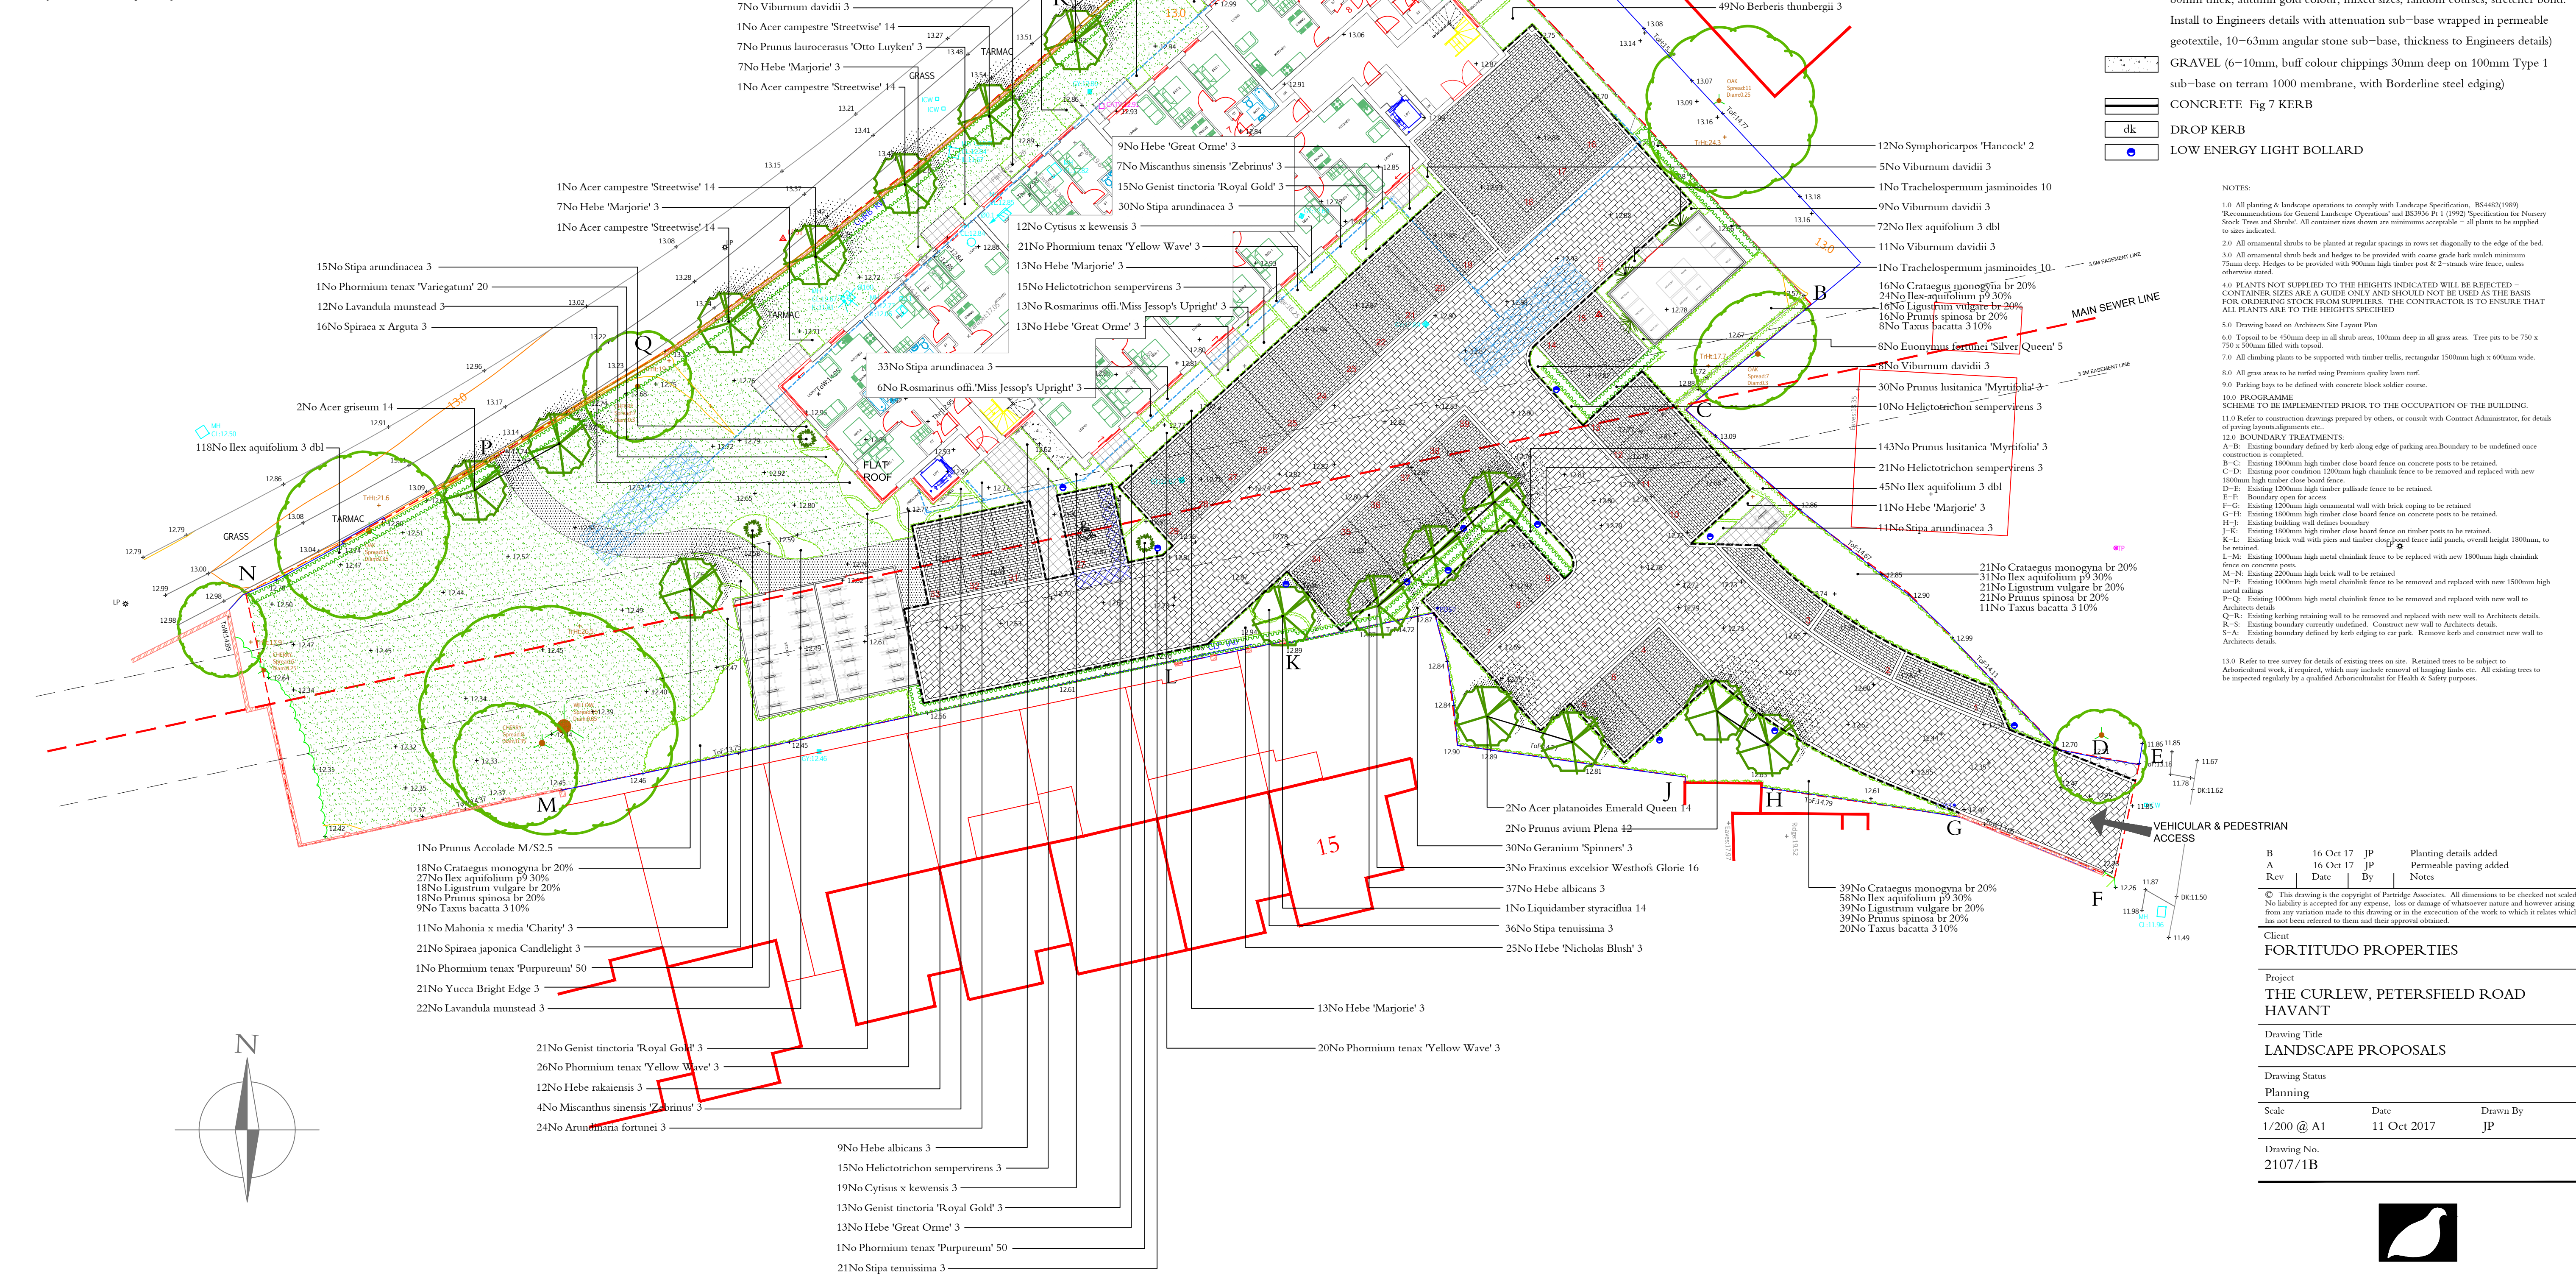
PLANT SCHEDULE

Tree Number	Abbreviation	Species	Specification	Density
2No	AGRI14	Acer griseum 14	FHS 14-16cm girth clear stem RB 3m high	Counted
14No	ACEQ14	Acer campestre 'Streetwise' 14	FHS 14-16 RB	Counted
2No	ACEQ14	Acer platanoides Emerald Queen 14	CG FHS 14-16cm girth clear stem	Counted
2No	PRUN17	Prunus avium Plena 14	FHS 14-16cm girth clear stem RB	Counted
3No	W16	Fraxinus excelsior Westhof's Glorie 16	FHS 16-18cm RB	Counted
1No	LIQST14	Liquidambar styracilua 14	14-16 girth RB	Counted
1No	PDMS2.5	Prunus Accolade M/S2.5	FHS 2.5-3.0m high multi-stem 3 break RB	Counted

Shrub Number	Abbreviation	Species	Specification	Density
45No	ILEX3 dbl	Ilex aquifolium 3 dbl	3L CG 40-50cm fhhd	3/m²
14No	PLC3	Prunus laurocerasus 'Otto Luyken' 3	30-40 3L	4/m²
56No	VIB3	Viburnum davidii 3	30-40 3L	4/m²
56No	HEM3	Hebe 'Marjorie' 3	30-40 3L	4/m²
46No	HEA3	Hebe albanica 3	25-30 3L	4/m²
25No	HENB3	Hebe 'Nicholas Blush' 3	30-40cm M CG bushy	4/m²
94No	CRQM-br	Crataegus monogyna br	1+1 25-50 BR	2/m²
14No	ILEX-p9	Ilex aquifolium p9	30-40 p9	2/m²
94No	IV-br	Ligustrum vulgare br	30-40 1+1 BR	2/m²
94No	PCS-br	Prunus spinosa br	1+1 30-40 BR	2/m²
48No	LAXA3	Lavon latifolia 3	30-40 3L bushy	2/m²
35No	HGO3	Hebe 'Great Orme' 3	30-40 3L	4/m²
35No	MAMHFC3	Mahonia x media 'Charity' 3	3L CG bushy	3/m²
21No	SPC3	Spiraea japonica Candlelight 3	30-40 3L	4/m²
34No	LAVM3	Lavandula munstead 3	3L CG 30-40cm high bushy	5/m²
21No	YUB3	Yucca Bright Edge 3	30-40 3L	4/m²
16No	SPA3	Spiraea x Arguta 3	3L CG bushy	4/m²
49No	GEN3	Genist tinctoria 'Royal Gold' 3	3L CG bushy 30-40cm	4/m²
62No	PLYW3	Phormium tenax 'Yellow Wave' 3	3L CG min 18 breaks	4/m²
12No	HEB3	Hebe rakaiensis 3	25-30 3L	4/m²
24No	ARF3	Arundinaria fortunei 3	CG 3L 40-60	4/m²
13No	CYS3	Cytisus x kewensis 3	3L CG bushy	4/m²
19No	ROS3	Rosmarinus offi 'Miss Jessop's Upright' 3	30-40 3L	4/m²
49No	BERC3	Berberis thunbergii 'Red Chief' 3	3L cap bushy min 0.6 high	3/m²
49No	BER3	Berberis thunbergii 3	30-40 3L	4/m²
14No	SYH2	Symphoricarpos 'Hancock' 2	40-60 2L	4/m²
19No	ILEX3 dbl	Ilex aquifolium 3 dbl	3L CG 40-50cm fhhd	3/m²
17No	PRMY3	Prunus lusitana 'Myrtifolia' 3	3L CG bushy	4/m²
8No	EUOSQ5	Euonymus fortunei 'Silver Queen' 5	5L CG 30-40cm high bushy min 10 leaks	4/m²
44No	FAG1+3 dbl	Fagus sylvatica 1+3 dbl	1+3 double spaced stock 1.2-1.5m high double row	Counted
2No	PPIP50	Phormium tenax 'Purpureum' 50	120-150 50L -20 breaks	Counted
1No	PHOT20	Phormium tenax 'Variegatum' 20	20L CG 40-60cm high min 20 breaks	Counted


Herbaceous Number	Abbreviation	Species	Specification	Density
89No	SA3	Stipa arundinacea 3	3L CG 30 breaks	5/m²
30No	GERSP3	Geranium 'Spinners' 3	3L cap	5/m²
21No	HECTHCS	Helictotrichon sempervirens 3	3L CG min 40 breaks	5/m²
57No	STL3	Stipa tenuissima 3	CG 3L	4/m²
11No	MZ3	Miscanthus sinensis 'Zebrinus' 3	3L CG	4/m²
40No	HECTHCS	Helictotrichon sempervirens 3	3L CG min 40 breaks	5/m²

Climber Number	Abbreviation	Species	Specification	Density
2No	TIAS10	Trachelospermum jasminoides 10	100mm 1 m	Counted









LEGEND

EXISTING FEATURES

-  TREE TO BE RETAINED (Refer to Arboricultural Report for details of protection and tree works)
-  SPOT HEIGHT

PROPOSED FEATURES

-  DECIDUOUS TREE
-  ORNAMENTAL SHRUBS
-  CLIMBING PLANT (see Notes)
-  ACCENT/SPECIMEN PLANT
-  HEDGE
-  GRASS
-  1.2m HIGH METAL RAILINGS
-  RENDERED CONCRETE BLOCK WALL (painted to match building)
-  TARMAC (to Engineers specification)
-  CONCRETE SLAB PAVING (Marshalls Saxon, 450x450mm, buff colour)
-  PERMEABLE CONCRETE BLOCK PAVING (Brett Paving Alpha Flow, 80mm thick, charcoal colour, mixed sizes, random courses, stretcher bond. Install to Engineers details with attenuation sub-base wrapped in permeable geotextile, 10-63mm angular stone sub-base, thickness to Engineers details)
-  PERMEABLE CONCRETE BLOCK PAVING (Brett Paving Alpha Flow, 80mm thick, autumn gold colour, mixed sizes, random courses, stretcher bond. Install to Engineers details with attenuation sub-base wrapped in permeable geotextile, 10-63mm angular stone sub-base, thickness to Engineers details)
-  GRAVEL (6-10mm, buff colour chippings 30mm deep on 100mm Type 1 sub-base on terram 1000 membrane, with Borderline steel edging)
-  CONCRETE Fig 7 KERB
-  DROP KERB
-  LOW ENERGY LIGHT BOLLARD

NOTES:

- All planting & landscape operations to comply with Landscape Specification, BS4482(1999) 'Recommendations for General Landscape Operations' and BS3066 Pt 1 (1992) 'Specification for Nursery Stock Trees and Shrubs'. All container sizes shown are minimum acceptable - all plants to be supplied to sizes indicated.
- All ornamental shrubs to be planted at regular spacings in rows set diagonally to the edge of the bed.
- All ornamental shrubs and hedges to be provided with coarse grade bark mulch minimum 75mm deep. Hedges to be provided with 900mm high timber post & rail - strands wire fence, unless otherwise stated.
- PLANTS NOT SUPPLIED TO THE HEIGHTS INDICATED WILL BE REJECTED - CONTAINER SIZES ARE A GUIDE ONLY AND SHOULD NOT BE USED AS THE BASIS FOR ORDERING STOCK FROM SUPPLIERS. THE CONTRACTOR IS TO ENSURE THAT ALL PLANTS ARE TO THE HEIGHTS SPECIFIED.
- Drivings based on Architects Site Layout Plan.
- Topsoil to be 450mm deep in all shrub areas, 100mm deep in all grass areas. Tree pits to be 750 x 750 x 300mm filled with topsoil.
- All clanking plants to be supported with timber trellis, rectangular 1500mm high x 600mm wide.
- All grass areas to be turfed using Premium quality lawn turf.
- Parking bays to be defined with concrete block soldier course.
- PROGRAMME SCHEME TO BE IMPLEMENTED PRIOR TO THE OCCUPATION OF THE BUILDING.
- Refer to construction drawings prepared by others, or consult with Contract Administrator, for details of paving, loggins, drainage etc.
- BOUNDARY TREATMENTS:
 - A-B: Existing boundary defined by kerb along edge of parking area. Boundary to be undefined once construction is completed.
 - B-C: Existing 1800mm high timber close board fence on concrete posts to be retained.
 - C-D: Existing poor condition 1200mm high chainlink fence to be removed and replaced with new 1800mm high timber close board fence.
 - D-E: Existing 1200mm high timber palisade fence to be retained.
 - E-F: Boundary open for access.
 - F-G: Existing 1200mm high ornamental wall with brick coping to be retained.
 - G-H: Existing 1800mm high timber close board fence on concrete posts to be retained.
 - H-I: Existing building wall defines boundary.
 - I-J: Existing 1800mm high timber close board fence on timber posts to be retained.
 - J-K: Existing brick wall with post and timber close board fence, overall height 1800mm, to be retained.
 - K-L: Existing 1000mm high metal chainlink fence to be removed and replaced with new wall to Architects details.
 - L-M: Existing 1000mm high metal chainlink fence to be replaced with new 1800mm high chainlink fence on concrete posts.
 - M-N: Existing 2200mm high brick wall to be retained.
 - N-P: Existing 1000mm high metal chainlink fence to be removed and replaced with new 1500mm high metal railings.
 - P-Q: Existing 1000mm high metal chainlink fence to be removed and replaced with new wall to Architects details.
 - Q-R: Existing kerb retaining wall to be removed and replaced with new wall to Architects details.
 - R-S: Existing boundary currently undefined. Construct new wall to Architects details.
 - S-A: Existing boundary defined by kerb edging to car park. Remove kerb and construct new wall to Architects details.
- Refer to tree survey for details of existing trees on site. Retained trees to be subject to Arboricultural work, if required, which may include removal of hanging limbs etc. All existing trees to be inspected regularly by a qualified Arboriculturalist for Health & Safety purposes.

B	16 Oct 17	JP	Planting details added
A	16 Oct 17	JP	Permeable paving added
Rev	Date	By	Notes

© This drawing is the copyright of Partridge Associates. All dimensions to be checked not scaled. No liability is accepted for any expense, loss or damage of whatsoever nature and however arising from any variation made to this drawing or in the execution of the work to which it relates which has not been referred to them and their approval obtained.

Client		
FORTITUDO PROPERTIES		
Project		
THE CURLEW, PETERSFIELD ROAD HAVANT		
Drawing Title		
LANDSCAPE PROPOSALS		
Drawing Status		
Planning		
Scale	Date	Drawn By
1/200 @ A1	11 Oct 2017	JP
Drawing No.		
2107/1B		



PARTRIDGE ASSOCIATES
Landscape Consultancy
2 Silvertown Court, New Street, Lymington, Hampshire SO41 9BQ
Tel: 01590 674699 E-mail: info@partridgeassociates.org.uk