


Minimum Thickness of Sub-base and Capping for Adoptable Roads

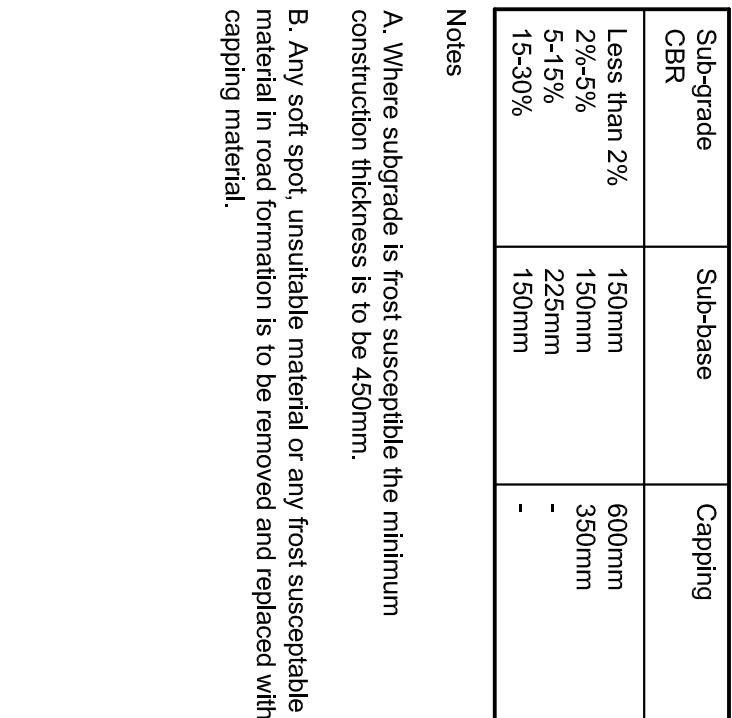


Sub-grade CBR	Sub-base	Capping
Less than 2%	150mm	600mm
2%-5%	150mm	350mm
5-15%	225mm	-
15-30%	150mm	-

Notes

A. Where subgrade is frost susceptible the minimum construction thickness is to be 450mm.

B. Any soft spot, unsuitable material or any frost susceptible material in road formation is to be removed and replaced with capping material.



Scale	1:20	Drawn	TL
Date	June 11	Checked	
File	1101010/hav-300	Drawing	1101010 / 300A