
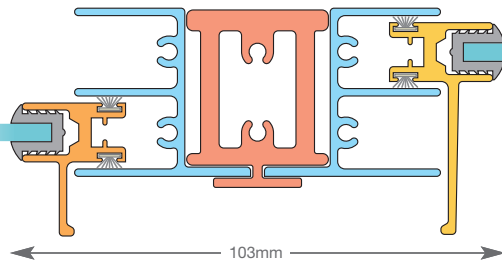


Standard Mullion/Transom

- Maintains clean lines
- Colour matched to frames
- Accepts common 36mm frame depth of Series 10, 20, 30, 40, 41, 42, 45, 46 and 50
- 'H' profile to room side face gives positive frame location and ensures a good seal

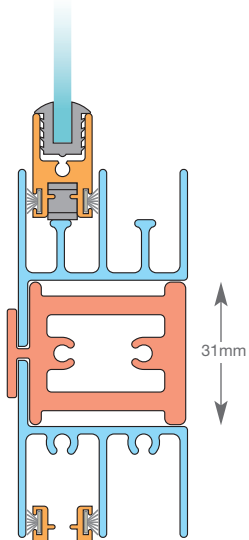


Transom Support

Guidance

- Transom spans above 1.4m may require separate support
- Factors will include the upper window
 - style
 - size
 - glazing


Standard method

25mm box section set behind interlock stile and bolted to transom

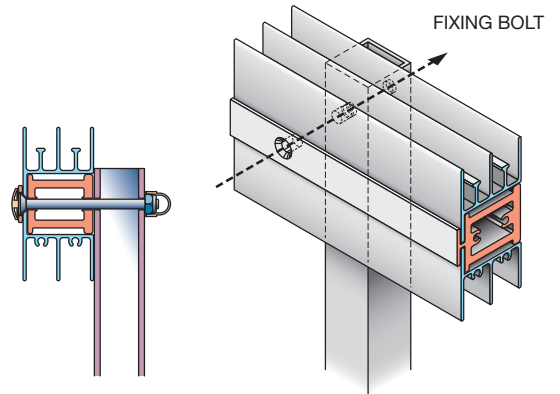


Alternative method

25mm flat bar hanger bolted to transom. This method is weight dependent.

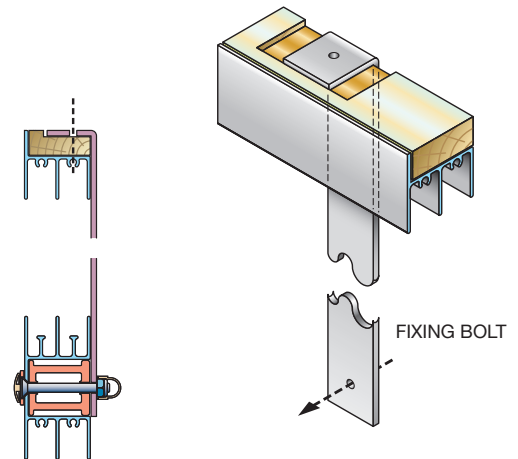


Heavy Duty Mullion/Transom

- Maintains clean lines
- Colour matched to frames
- Couples Series 60, 80 and 90 to each other and to other series
- 'H' profile to room side face gives positive frame location and ensures a good seal

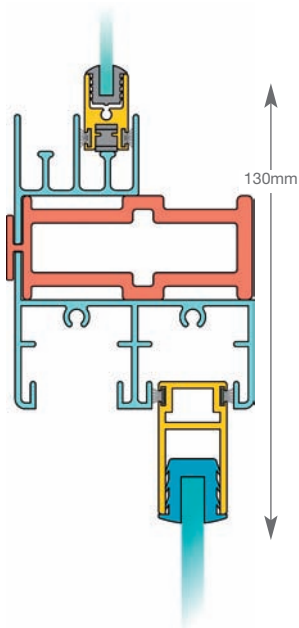


Box mullions

76mm x 38mm or 45mm x 102mm box sections may be specified for wide span transoms or mullions that provide a partition location point (not illustrated)

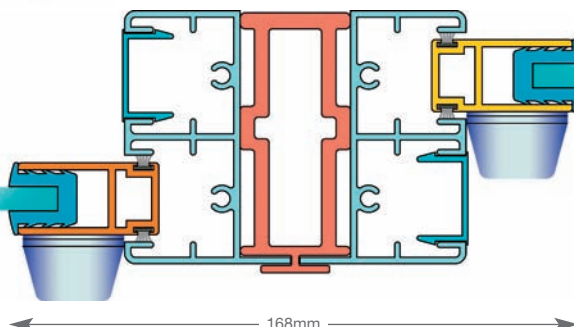

Shaped coupling

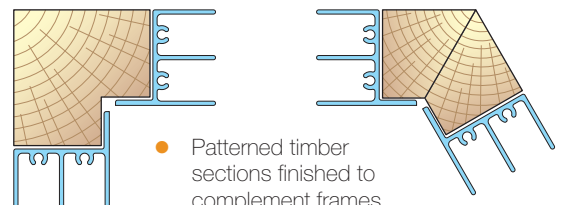

- Patterned timber sections finished to complement frames
- Suitable for
 - bay windows
 - slope glazing

Selectaglaze has developed a wide product range to protect living and working environments against noise, heat loss, ingress of dirt, fire, intruders or the effects of blast. Available window styles include horizontal sliding, vertical sliding, hinged, lift-out, fixed and demountable fixed panels.

Selectaglaze reserves the right to change specifications without prior notice.

Refer to www.selectaglaze.co.uk for more information and a full range of product sheets

Tel: 01727 837271 e-mail: enquiries@selectaglaze.co.uk

Ref: Coupling (01/11)