



HEAD DETAIL

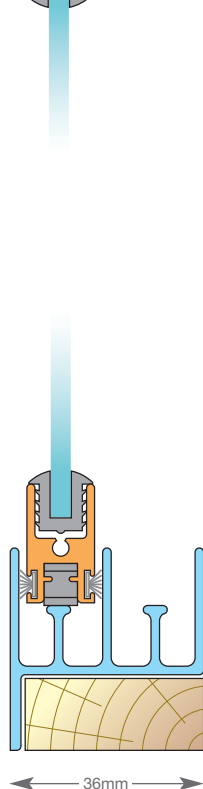


CILL DETAIL

Drawings not to scale



Acetyl glide

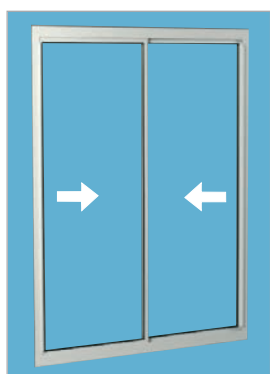

Design concept

- A slim and versatile horizontal sliding system that provides easy access for ventilation and is suitable for treating most types of window
- Available with 2, 3, 4 or even 5 sliding sashes (panels)
- Minimal impact on blinds or curtains



Design Features

- Sashes slide on glide pads or for larger sizes, stainless steel ball races with nylon tyres
- Integral full height projecting finger pulls
- Twin brush seals ensure high sealing efficiency
- Slim 23mm wide interlock stile as standard
- Heavy duty interlock for units over 1700mm high or those requiring locks
- Fixings concealed within the frame - trims not required
- Sashes are removable for maintenance and cleaning
- Frames may be linked with a colour matched aluminium transom/mullion section

Size Guidelines

- Maximum individual sash 1100mm (w) x 2200mm (h)
- Minimum individual sash 300mm (w) x 300mm (h)
- Sash height to width ratio should not normally exceed 4:1
- Risk assessments for sash sizes must account for weight, location and type of end user

OPTIONS

Glazing:

- 4mm to 6.8mm

Frames:


- Recessed finger pull to allow sashes to contra slide
- Heavy duty interlock stile
- 38mm box interlock stile
- Low profile running track to clear inward opening windows
- Triple track allowing 3 sashes to stack at one end

Hardware:

- Acetyl glide pads (standard)
- Stainless steel ball races fitted with tyres

Locking:

- Flipper catch handle
- Fitch catch - white or silver
- Yale 8K100 security lock - white
- Plunge lock (box interlock stile only)
- Concealed shoot bolts
- Inverted 'U' channel restrictor

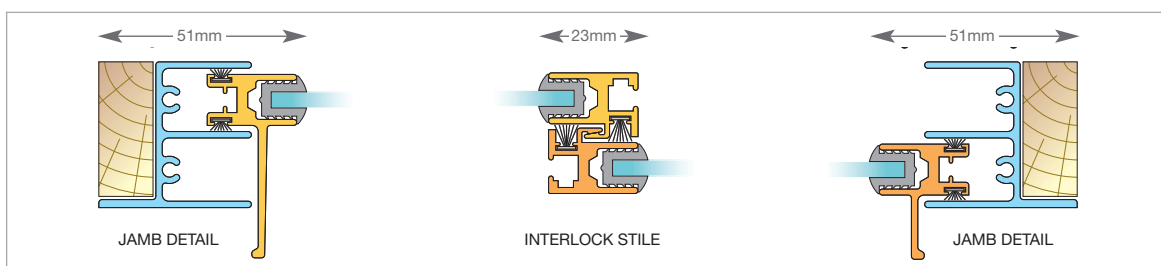

Selectaglaze has developed a wide product range to protect living and working environments against noise, heat loss, ingress of dirt, fire, intruders or the effects of blast. Available window styles include horizontal sliding, vertical sliding, hinged, lift-out, fixed and demountable fixed panels. Selectaglaze reserves the right to change specifications without prior notice.

Refer to www.selectaglaze.co.uk for more information and a full range of product sheets

Tel: 01727 837271 e-mail: enquiries@selectaglaze.co.uk

Ref: S10 (01/11)