



RESTRICTOR STAYS

TYPE

PERMANENT STANDARD DUTY
RESTRICTOR

BENEFIT

Permanent restriction tested to
BS6375 Part 2: 2009



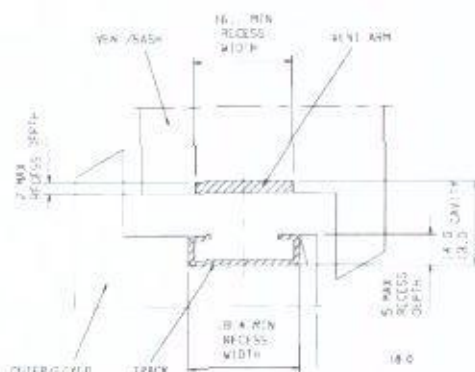
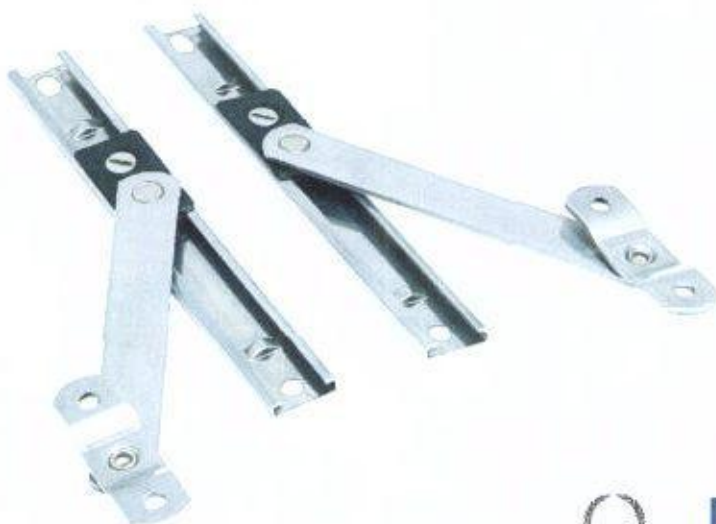
STANDARD DUTY RESTRICTOR STAYS

The Standard Duty Restrictor Stays give an opportunity to permanently restrict opening vents, particularly useful in applications where child safety is required or where windows open out onto corridors or gangways.

In normal operation the restrictor stay allows the vent to open until the slider engages against the opening stop in the track.

- Tested to BS6375 Part 2: 2009 to withstand a force of 350N for one minute
- Device provides additional friction for windows
- Available in ferritic 430* stainless steel
- 10 year guarantee (details available upon request)

The Standard Duty Restrictor Stays are designed to be fitted between two flat and parallel rigid faces that conform to the measurements shown below.

10
YEAR GUARANTEE

* Standard ferritic (was 430) stainless steel to BS EN 10088/2 Grade 1.4016



Due to our policy of continual improvement we reserve the right to alter specifications without notice. It is the responsibility of the window & door manufacturer to ensure that the finished window/ door meets the required performance and safety specification.

All transactions are subject to our standard conditions of supply, which are available on request.

Securistyle Ltd
Kingsmead Industrial Estate, Princess Elizabeth Way
Cheltenham, Gloucestershire GL51 7RE, UK

Tel: +44 (0) 1242 221200
Fax: +44 (0) 1242 228194/520828

E-mail: info@securistyle.co.uk
Website: www.securistyle.co.uk



Innovation in Window and Door Hardware

WINDOW RESTRICTORS

SD Restrictor Stays permanent light duty restrictor

[Home](#) » [Products](#) » [Window Restrictors](#) » SD Restrictor Stays



- In normal operation the restrictor allows the vent to open until the slider engages against the opening stop in the track
- Capable of complying with BS 6375-2 and EN 13126-5
- Device provides additional friction for windows
- Available in ferritic* stainless steel
- 10 Year Guarantee (details available upon request)

*Standard ferritic (was 430) steel to BS EN 10088-2 Grade 1.4016

Click product code for more information

SD RESTRICTOR STAYS FERRITIC STAINLESS STEEL	
Partcode	Restricts the opening to (mm)
RS4	100 or less
RS6	80 to 200
RS9	100 to 300

The actual opening gap achieved will depend on the orientation of the restrictor, the hinges used, the vent size and the window profile design.

Click product code for more information

RELATED PRODUCTS...

- [Ancillaries](#) » [Vector Excluder ASD](#)