

PLANT STOCK

All stock to be in accordance with the relevant British Standard 3926 part 2.
Handling and Planting: Plant material to be handled, supplied and planted in accordance with the committee on Plant supply and establishment publications.
In all cases plant material should comply to the relevant British Standard.
Species: Plants to be supplied exactly true to name.
Delivery of plants: Ensure that adequate protection is given to all plants and their root system to preclude failure due to lack of moisture or exposure due to transportation to the site, and between delivery and planting.

TOPSOIL
Topsoil to be BS 3882 (2007) definition "multi-purpose topsoil" to be placed to depth of 450mm to planted areas.

PREPARATION
During the above operation Enmag granular fertilizer to be incorporated into the topsoil.

TREE PLANTING
Tree pits: Excavate in positions shown on the drawing a pit measuring 900mm diameter x 600mm deep, the base of the pit to be broken up to a depth of 150mm.
Backfill: To comprise approved topsoil and 20l tree and shrub planting compost and 150g Sierrablen Flora slow release fertiliser evenly mixed and well firmed around the root, and finished soil level should correspond with the water mark of the tree.
Any surplus material should be removed from the area.
Staking: Trees should be secured by means of single treated stake and rubber belt tied below the crown.
Irrigation: Trees to be fitted with appropriate Greenleaf Root-rain Urban irrigation pipe and inlet.
Pruning: Following planting the crown of each tree to be lightly pruned to remove any damaged twigs and buds and to promote even, vigorous growth.

SHRUB PLANTING
Set out: Evenly within the planted areas in accordance with the drawing and schedule giving due consideration to future growth.
Planting: Should be in a pit that comfortably accommodates the container. Each plant shall be placed in an upright balanced stance and backfill returned. Well Heel in to ensure no air pockets are left and leave plants firm.
Pruning: Lightly prune is necessary to encourage bushy establishment.
Completion: Beds should be neatly adjacent to kerbs, forked over and left neat and tidy.

WATERING
Ensure all trees and shrubs are watered to field capacity following planting.

MULCH
Place a layer of graded amenity bark mulch to all planted areas. Fork over and leave neat and tidy.

PLANTING TIME
Planting to be installed in accordance with build programme and container grown material to be planted at any time if ground and weather conditions are favourable.

LAWN
Grassed areas to be laid with seed-grown amenity turf.


POST OCCUPATION
Landscaped area to be maintained by property owners.
Any plant that fails to establish during the first five year period to be replaced by one of matching size and species.

PLANTING SCHEDULE

Trees
CC: Crataegus 'Coccinea'
CAP: Crataegus 'Alba Plena'
Bp: Betula Pendula

Shrubs
C10 - 45-90cm (as shown)
7 FJ Fastia japonica
7 PV Pittosporum 'Variagatum'
2 PD Phormium 'Dazzler'
6 Ca Cordyline australis

Shrubs
C3 set out at 3 sq m
3 Fg Festuca glauca
9 HV Hebe 'Variagata'
3 Hr Hebe rakaiensis

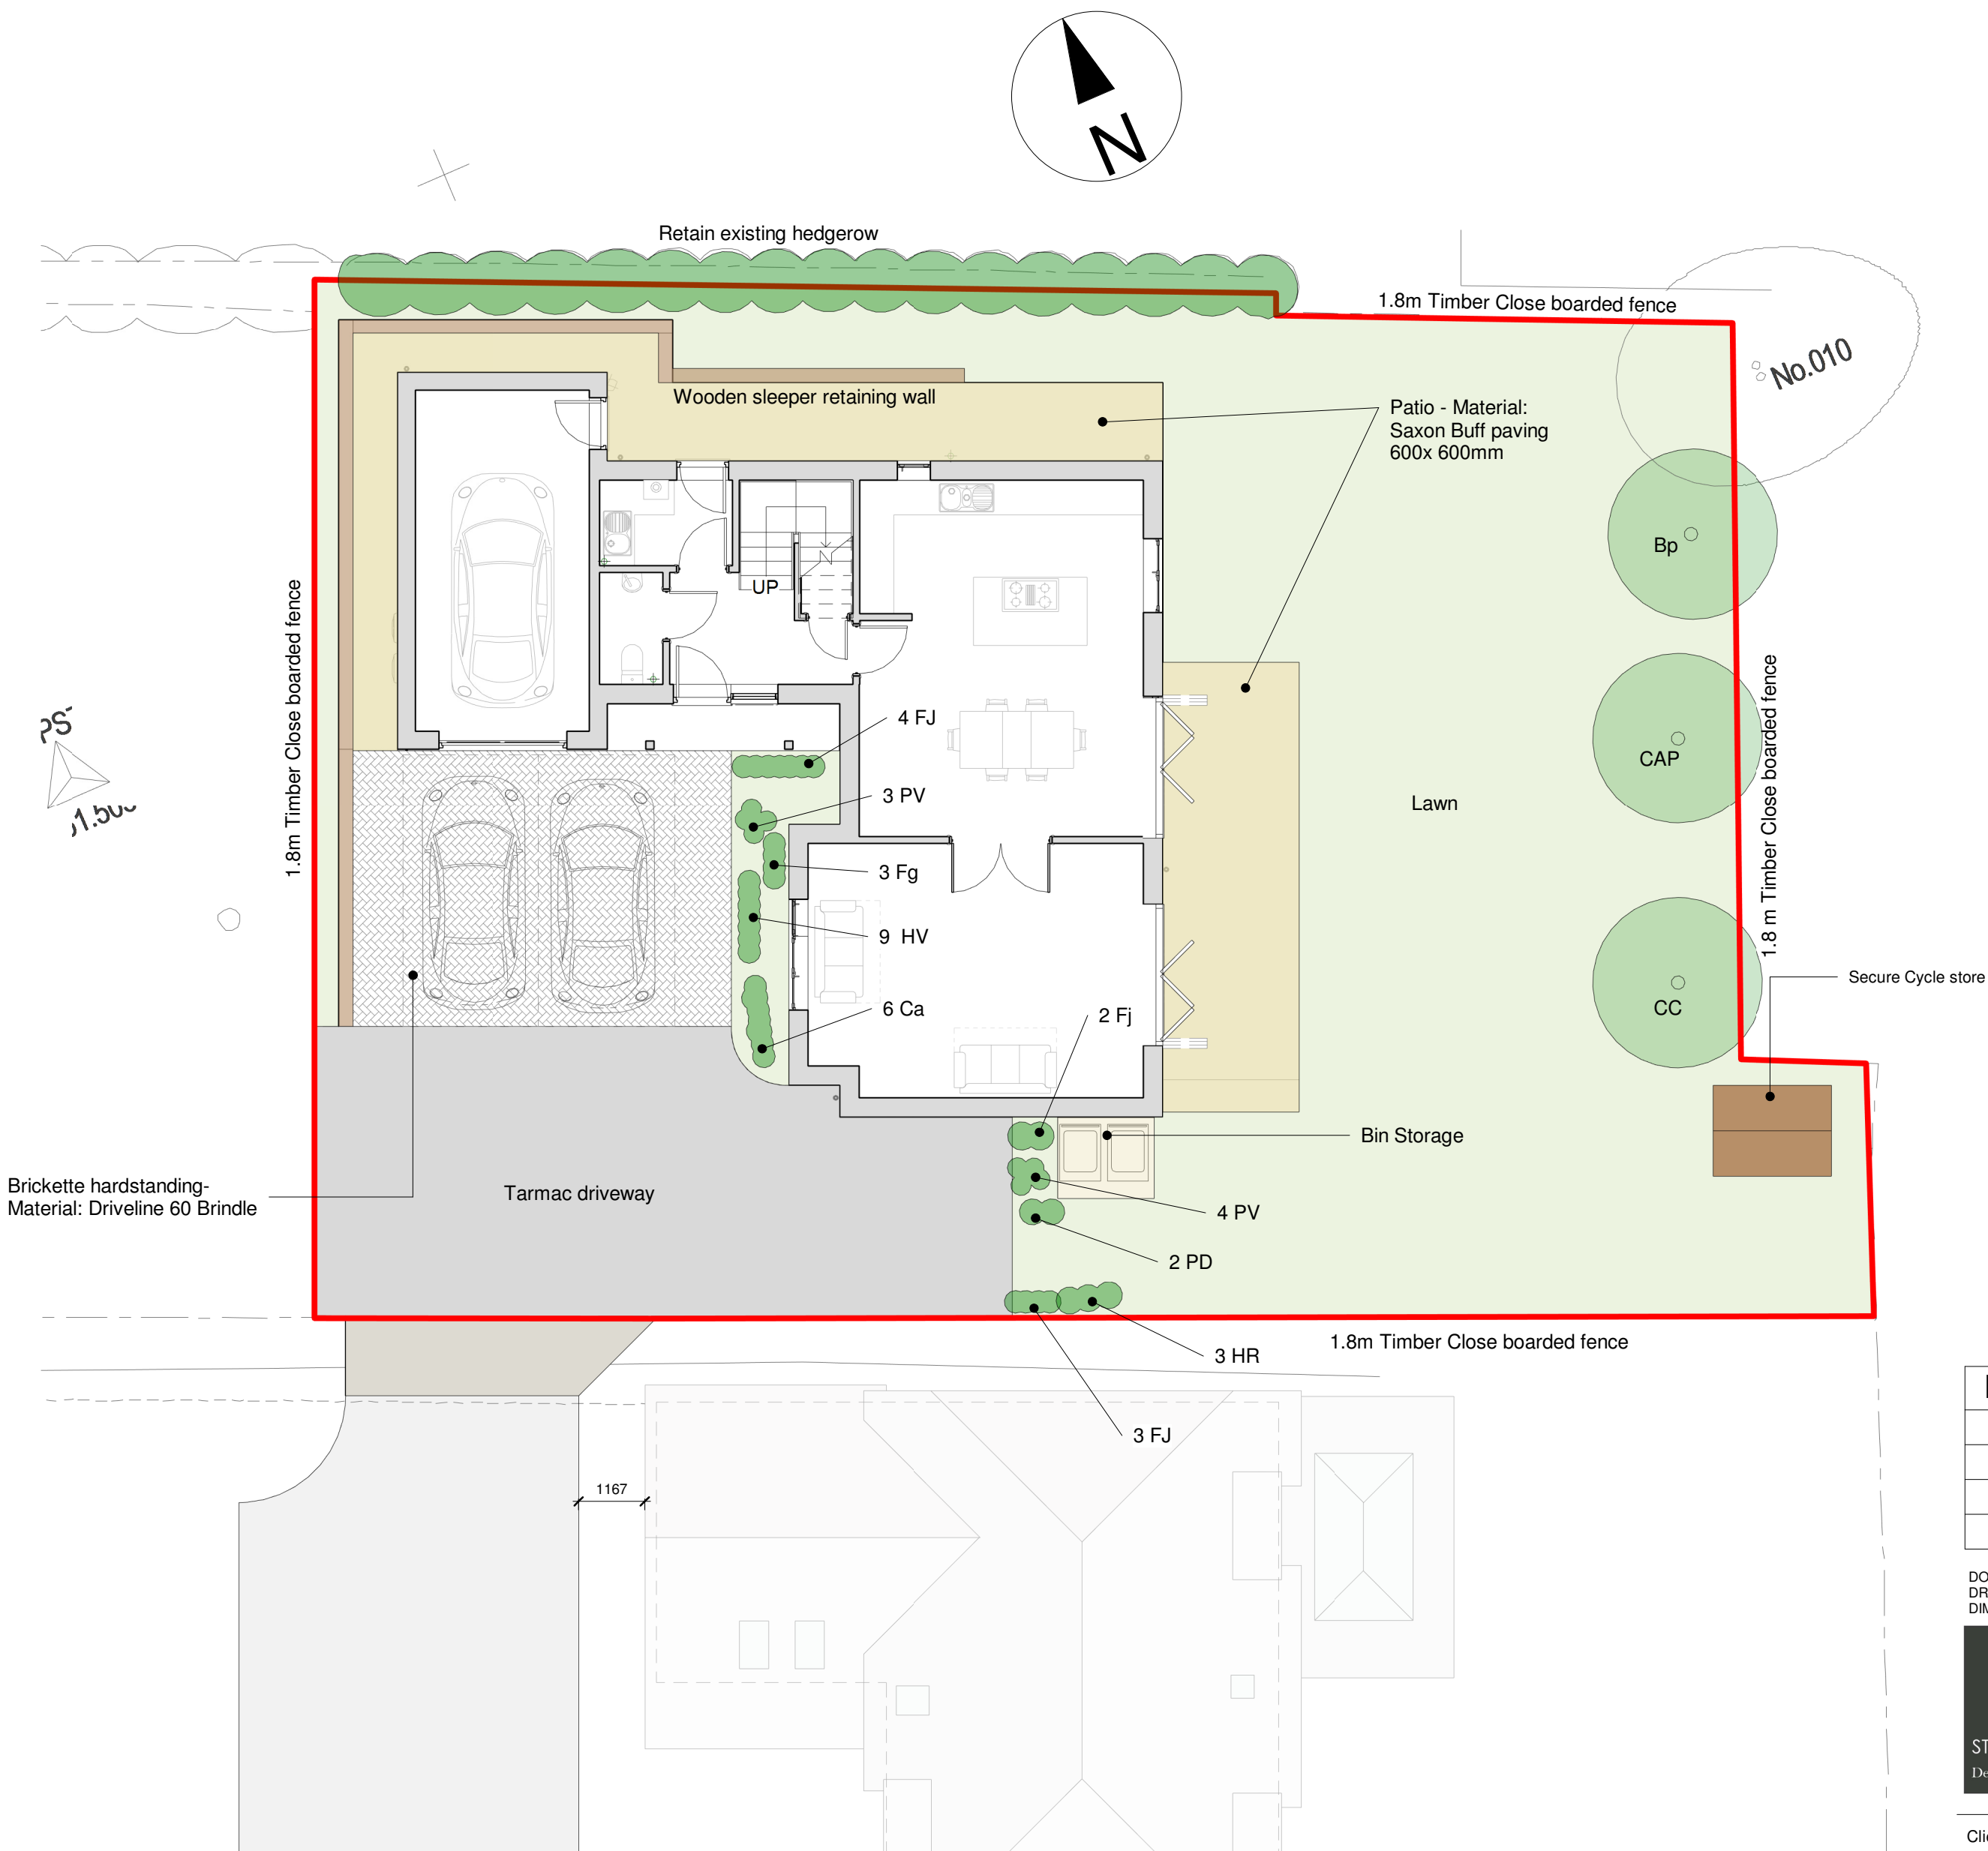

No.	Description	Date

DO NOT SCALE FROM THIS
DRAWING REFER TO ANNOTATED
DIMENSIONS ONLY

All Dimensions to be confirmed on site.
Designer to be notified by the contractor if any
discrepancies occur before construction begins.

STYLE FRONT CO.UK
Design & build

Style Front London Ltd
Chester House, Fulham Green
81-83 Fulham High Street
Fulham, London
SW6 3JA
Tel: +44 (0)293 7139301
Email: info@stylefront.co.uk

© 2017 - The contents of this drawing and the designs
depicted are and remain the exclusive property under
copyright of Style Front London Ltd.

Client:	Style Front Holdings Ltd		
Project:	114 London Road, Cowplain, PO8 8HB		
Drawing Title:	Soft/Hard landscaping and boundary treatment plan		
Drawing No:	H5-PC-200		Rev:
Project No:	114LR	Date: 27-03-2017	Scale: As indicated @ A2