



4




6

7

1 df 2

8

THIS DOCUMENT CONTAINS INFORMATION THAT IS CONFIDENTIAL AND/OR PROPRIETARY TO DONALDSON COMPANY. ANY RIGHTS TO INTELLECTUAL PROPERTY OR TO ANY INFORMATION OR DATA CONTAINED HEREIN ARE RESERVED AND WILL REMAIN THE PROPERTY OF DONALDSON COMPANY. NO PART OF THIS DOCUMENT IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING BY DONALDSON.

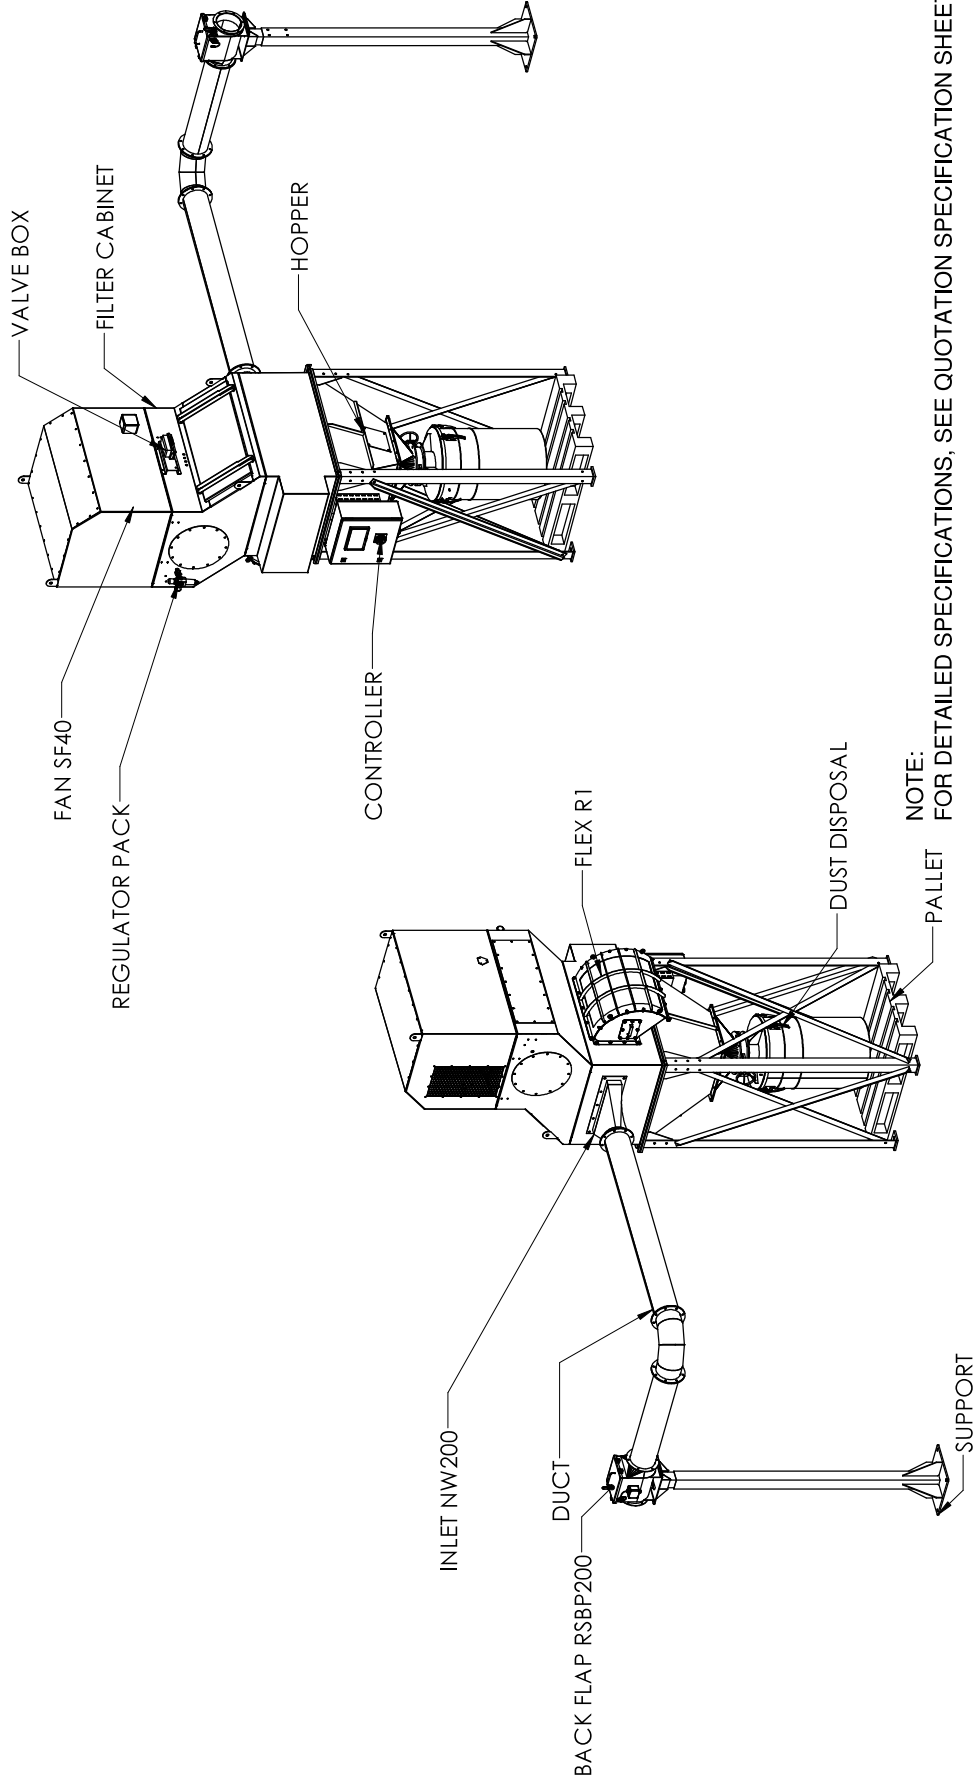

NOTE:

FOR DETAILED SPECIFICATIONS, SEE QUOTATION SPECIFICATION SHEET (QSS)
<https://donaldson.sharepoint.com/sites/IAF-PDT/QSS/AW1801101.xlsm>

NOTES:

- * FOR ALL INVOLVED EXPLOSION AND FIRE PROTECTION DEVICES APPLIED ON THIS UNIT, PLEASE REFER TO THE PROPER MANUAL(S) FOR THE CORRECT INSTALLATION AND SAFETY MEASURES.
- * 5MM THICK STIFFENERS ARE SUPPLIED ON THE SEATING FLANGE. PLEASE TAKE THIS INTO ACCOUNT WHEN PURCHASING THE NECESSARY HARDWARE.

ALL BURS AND SHARP EDGES TO BE REMOVED
COMBUSTION PROTECTION ACCORDING TO HANDBOOK ORDER
WELDING OF HARDWARE ACCORDING TO EN ISO 2553-2:2012 & EN ISO 2553-1:2012
THE BE REMOVED AND BE REMOVED BEFORE APPLICATION
GASKET SEALING AREA TO BE DECREASED BEFORE APPLICATION
ALL DIMENSIONS ARE IN MILLIMETERS

FOR EXPLANATION OF DIMENSIONS, NOTES, SYMBOLS, ETC. SEE: BP 8484

PAINT SPEC.		TITLE:		PROPOSAL DRAWING CPC-4-R		REVISION		NUMBER:		0		SIZE		A3	
THICKNESS:		AUTH. NO.		DR. NS		5/08/2025		AW1801101		SCALE: N. T. S.		SHEET: 2 OF 2		SolidWorks	
MATERIAL:		USED ONE:		APP. GVE		5/08/2025		FIRST ANGLE PROJECTION		C/C SW:		DO NOT SCALE		COPYRIGHT © DONALDSON COMPANY, INC.	
WEIGHT: 709.6 Kg		GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED:		ISO 2768 mK		For welded constructions, EN ISO 15920 B		UNLESS OTHERWISE SPECIFIED:		3,2		DO NOT SCALE		COPYRIGHT © DONALDSON COMPANY, INC.	

