PERMIT

Outer line of proposed Polytennel pad footings on disturbed ground line of former 'Hartley Greenhouse' footing.

Length of proposed polytunnel Greenhouse above ground

20000mm

SITE OF HARTLEY GREENHOUSE HOUSE No 2 (demolished)

SITE OF REMAINING HARTLEY GREENHOUSE HOUSE No 1 (to be demolished)

Pad footings located either side of former earlier structure with bridge over.

Outer line of proposed Polytennel pad footings on disturbed ground line of former 'Hartley Greenhouse' footing.

RAISED BED (remains of pine pit)

KIOSK (demolished)

Section A

NORTH FACING GLASSHOUSE

STORE

Floor area of proposed polytunnels.

Perimeter of 'Hartley Greenhouses' refer to notes within Key below.

6000mm Combined widths of proposed Polytunnel Greenhouses above ground

Proposed 'Polytunnels'
PLAN OF SITE FOR POLYTUNNEL GREENHOUSES

0 2 4 6 8 M

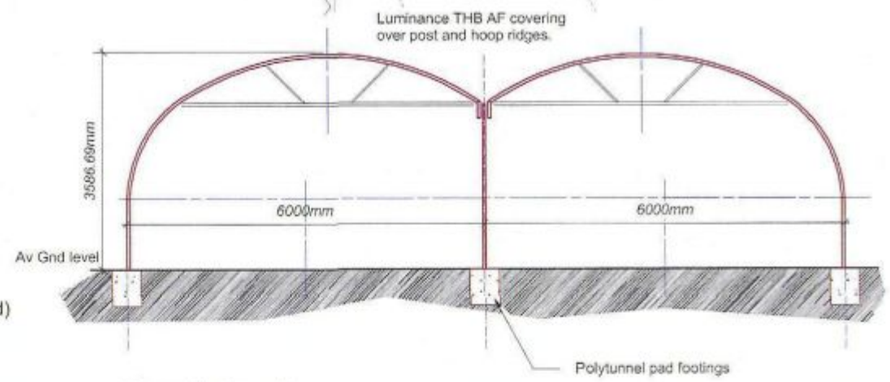

Proposed 'Polytunnels'
CROSS SECTION ON LINE A - A

GY

GRAVEL

O/H CABLE

LONG STORE

O/H TEL WIRE

HAVANT BOROUGH COUNCIL
04 OCT 2010
RECEIVED

VALID APPLICATION
28 SEP 2010
DIRECTOR OF ENVIRONMENT
HAMPSHIRE COUNTY COUNCIL

Planning Application

	Data Source
1.	Electronic OS plan
2.	Buildings plans fully surveyed
3.	
	Tolerance of Scale
	Maximum usable Scale -

Notes

1. No dimensions to be scaled from this drawing.
2. Reproduced from the Ordnance Survey mapping with the permission of the Controller of Her Majesty's Stationery Office. Crown copyright. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings. Hampshire County Council LA078651, 2003

rev	description	date	by
P1	Advance issue for Planning consultation.	20.07.10	MDS
A	Modification to Polytunnel profile - Planning Application	06.10	MDS

N

KEY

Lines of walls (some conjectural) to original 'Pine Pits' and 'Melon Ground' greenhouses. Based on archaeological survey by Gifford Report No. 11373.R03, May 2004.

Lines of perimeters to the 'Hartley Greenhouses' Nos. 1 & 2.
No.1 due for demolition due to structural stability and public safety.
No.2 already demolished following collapse due to recent storm damage.

Locations of the pad footings for the proposed 'polytunnel' greenhouses.
Generally, 500 x 500 x 600mm deep unless otherwise stated.
Located at 2500mm centres longitudinally, unless otherwise stated and at 6000mm cross sectionally.

Floor area of proposed 'Polytunnel' greenhouses.

Hampshire County Council

Property, Business and Regulatory Services,
Three Minsters House,
76 High Street, Winchester SO23 8UL
tel. (01962) 847801

PROJECT
Staunton Country Park
Glasshouse area
New 'Polytunnels'

SHEET CONTENTS
Glasshouse area
Layout as proposed

SCALE	DATE	DRAWN	DRAWING No	REVISION
1:50 @ A1 1:100 @ A3	07. 2010	MDS	R9002-207 FILE REF: R9002 207	A

A