












WINDOW SCHEDULE						
Element ID	WF-01	WF-02	WF-03	WF-04	WG-01	WG-02
External Elevation						
Height	900	900	1,100	1,100	1,200	535
Width	2,400	1,350	1,772	2,817	2,400	700
Thermal Performance	1.2 W/m2K or better; A1 Fire Rated	1.2 W/m2K or better; A1 Fire Rated	1.2 W/m2K or better; A1 Fire Rated	1.2 W/m2K or better; A1 Fire Rated	1.2 W/m2K or better; A1 Fire Rated	1.2 W/m2K or better; A1 Fire Rated
Window Description	Refer to CTS Specifications	Refer to CTS Specifications	Refer to CTS Specifications	Refer to CTS Specifications	Refer to CTS Specifications	Refer to CTS Specifications
Window Area	2.16	1.22	1.95	3.10	2.88	0.37

Element ID	WG-03	WG-04
External Elevation		
Height	1,200	2,050
Width	1,772	2,817
Thermal Performance	1.2 W/m2K or better; A1 Fire Rated	1.2 W/m2K or better; A1 Fire Rated
Window Description	Refer to CTS Specifications	Refer to CTS Specifications
Window Area	2.13	5.77

DOOR SCHEDULE		
Element ID	DG-01	DG-02
External Elevation		
Height	2,100	2,100
Width	910	832
Thermal Performance	1.2 W/m2K or better; A1 Fire Rated	1.2 W/m2K or better; A1 Fire Rated
Door Description	Refer to CTS Specifications	Refer to CTS Specifications
Door Area	1.91	1.75

All windows and doors require a sill or threshold.
All windows to have trickle vents, except wetrooms e.g. Kitchen, WC and Bathroom
All windows to meet FENSA and PAS24 compliance standards.
An opening light is to be provided to each first floor habitable room to allow for emergency egress. Minimum of 450x450mm, and have a minimum area of 0.33sqm.
Any glazing which is obscured as exsiting, must be reinstalled as obscured, satin privacy glass.
Dimensions are for cost purposed only
Handing of doors to math existing
Windows and doors to be measured on site.

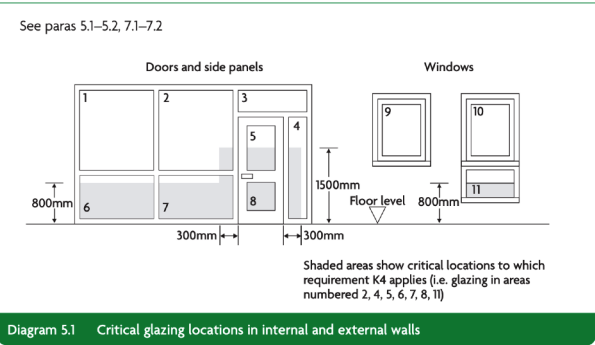

K4: All windows and external dooes to meet AD K Section 5: Protection against impact with glazing requirements. Refer to Diagram 5.1 for critical glazing locations in internal and external walls.

PROPOSED

A3

Scales

Constructive Thinking Studio

Liverpool Science Park IC 1

131 Mount Pleasant

L3 5TF

www.constructivethinking.co.uk

+44 (0) 151 705 3433

bim@constructivethinking.co.uk

CONSTRUCTIVE THINKING

Safety Health and Environmental Information

In addition to the hazard/risks normally associated with the types of work detailed on this drawing take note of the below. It is assumed that all works on this drawing will be carried out by a competent contractor working, where appropriate, to an appropriate method statement.

This document and its design content is copyright ©. It shall be read in conjunction with all other associated project information including models, specifications, schedules and related consultants documents. Do not scale from documents. All dimensions to be checked on site. Immediately report any discrepancies, errors or omissions on this document to the Originator. If in doubt ASK.

Demolition/Adaption Risks

Risk of fragile render, existing cladding and rainwater goods collapsing. Contractor to ensure operatives wear PPE and carry out works carefully. For Further information see Risk Register.

Construction Risks

Risk of injury to operatives through working from height, tripping hazards, etc. Care to be taken while working on site and appropriate PPE to be worn. For further information see Risk Register.

Maintenance/Cleaning Risks

Cleaning windows from height. Appropriate equipment to be used. PPE to be worn. For Further information see Risk Register.

Revision	Date	By	Check
	21/03/2025	FN	LFS

Client

TGP

Project

TGP Portsmouth

Status

Stage Approval Subject to Building Control - A1 - LFS

Drawings

Window Schedule, Door Schedule

File

15 Hemsley Walk_AC28

Window and Door Schedule

15 Hemsley Walk PO8 8JW

Drawing Number

7084 -CTS- 01 - 15 -L-A-4413

Revision

P06