

Langstone Park Havant (Phase 2)

XLB Property Ltd

BREEAM UK NC V6 Pre-Assessment Report
Commercial – Industrial – Shell & Core

AES Sustainability Consultants Ltd

16 February 2024



	Author	Date	E-mail address
Produced By:	Wayne Maw	09.02.2024	wayne.maw@aessc.co.uk
Reviewed By:	Katrina Edgington	16.02.2024	Katrina.Edgington@aessc.co.uk

Revision	Author	Date	Comment
-	Wayne Maw		Issue for Planning

Contents

1.	Introduction.....	3
2.	BREEAM Credit Filter.....	3
3.	BREEAM Assessment Process.....	4
4.	Pre-Assessment Score Summary	4
5.	Conclusion & Recommendations	6
6.	Appendix A – BREEAM Credit Strategy Summary.....	7

1. Introduction

AES Sustainability Consultants have been instructed by XLB Property Ltd to complete a BREEAM Pre-assessment in order to define a strategy to achieve BREEAM 'Excellent' for the proposed new Langstone Park Havant (Phase 2) development.

The proposals comprise of 3 industrial units in the form of two buildings as part of the wider Langstone Park development, units 5,6 & 7 are phase two of this development.. The three units are predominantly warehouse space with a first floor of office space serving the warehouse function.

Havant Borough Council requires BREEAM Excellent for this development, in reference to local planning policy CS14 of the Havant Borough Local Plan (Core Strategy) 2011, the National Planning Policy Framework and the outline planning permission APP/22/00172.

BREEAM Manual:	BREEAM UK New Construction (NC) v6.1
BREEAM Building Type:	Commercial – Industrial Unit – Warehouse Storage/ Distribution
BREEAM Scope:	Shell & Core
BRE Registration:	TBC
Project Size (GIA):	8,339m ²
Required Rating:	Excellent – 70%

2. BREEAM Credit Filter

Designed to be untreated?:	No
Building services (heating):	Air
Building services (cooling):	Air
Commercial cold storage present:	No
Transportation systems present (e.g. lifts, escalators, moving walkways):	Yes
Laboratory present:	No
Fume cupboards / Containment devices:	N/A
Unregulated water uses:	No
External areas present:	Yes
Statutory requirements impacting outdoor space?:	No
Unregulated energy load:	Yes
Post-occupancy Ene 01 credits targeted:	No

3. BREEAM Assessment Process

There are four stages within the BREEAM Assessment process:

- **BREEAM Pre-Assessment:** The BREEAM assessor meets/liases with the project team to establish a robust strategy to ensure the required BREEAM rating is achievable. Targets are set at this stage based on information available and reasonable assumptions. Actions required to be carried out at an early stage are identified for implementation and a credit strategy is set.
- **BREEAM Design Stage:** The project team provide evidence to prove that targeted credits have been incorporated into design. This is verified by the BREEAM assessor. A submission is made to the BRE for Interim Certification.
- **BREEAM Post-Construction Review:** The project team provides as-built information in order to confirm design commitments have been implemented. The BREEAM assessor undertakes a site inspection to verify the construction. A submission is made to the BRE for Final Certification.

A BREEAM rating is achieved at the Design and Post Construction stages where:

- Credits are awarded to exceed the BREEAM rating benchmark. In order to achieve BREEAM Outstanding a score of 85% or more must be achieved; Excellent 70%; Very Good 55%; Good 45% and Pass 30%.
- The minimum standards for the rating level targeted are achieved. This involves compliance with specific credit areas to demonstrate a fundamental level of performance in key areas.

Any change to the scope of works may cause alteration to the applicable criteria and credits within the assessment would be subject to change.

4. Pre-Assessment Score Summary

The Pre-assessment has established the following:

- **Available Credits:** Credits that are available to the building type
- **Targeted Credits:** Credits that have been targeted in order to achieve the required rating
- **Potential Credits:** Credits that have potential to be targeted where required to achieve the required rating


The table below summarises the value of available, targeted and potential credits within the assessment.

A summary of the credit strategy is presented in Appendix A – BREEAM Credit Strategy Summary.

If all targeted credits were achieved, BREEAM Excellent would be achieved with a score of **73.09%** and all minimum requirements met.

If all targeted and potential credits were achieved, BREEAM Excellent would be achieved with a score of **83.14%** and all minimum requirements met.

	Credit Value (%)	Credits Available	Credits Targeted	Targeted %	Credits Potential	Potential %
Management	0.61	18	16	9.78	1	0.61
Health & Wellbeing	0.80	10	6	4.80	0	0.00
Energy	0.67	21	11	7.33	0	0.00
Transport	0.96	12	9	8.63	2	1.92
Water	0.78	9	6	4.67	1	0.78
Materials	1.25	14	9	11.25	3	3.75
Waste	0.78	10	10	7.00	0	0.00
Landuse & Ecology	1.15	13	9	10.38	0	0.00
Pollution	0.75	12	7	5.25	4	3.00
Exemplary	1.00	10	4	4.00	0	0.00
				73.09		10.06

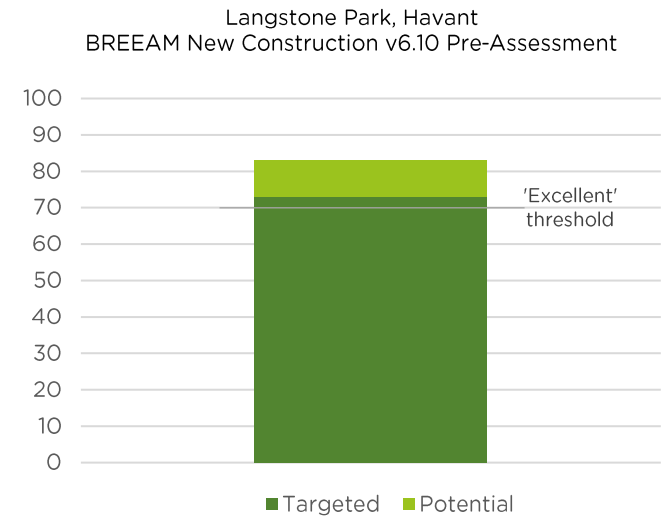

5. Conclusion & Recommendations

A BREEAM Pre-assessment has been completed in order to define a strategy to achieve BREEAM 'Excellent' for the proposed new Langstone Park Havant (Phase 2). The presented strategy achieves a targeted score of 73.09% and a rating of BREEAM Excellent. Achievement of this rating meets compliance with Policy CS14 of the Havant Borough Local Plan for BREEAM Excellent.

Appendix A – BREEAM Credit Strategy Summary presents the proposed assessment strategy.. Full criteria and evidential requirements are found in the [BREEAM New Construction V6.1 manual](#)

In order to achieve the required rating, it is important to ensure all minimum standards are met. These are identified and targeted within the credit strategy.

Within the assessment methodology there are a number of credits that have time limitations. To ensure compliance with the credit strategy it is critical that early-stage requirements are actioned appropriately. Failure to do so may prevent the required rating being achieved and/or lead to increased costs. Section 5 of this report provides further detail.

It is recommended that a contingency of ~4.00% above the scoring threshold for the required rating is incorporated into the targeted score. This provides a safety net to protect the required rating. The target score should therefore be ~74.00%.

A Set of potential credits have been identified within the assessment and are detailed within section six of this report.

To ensure the required rating is achieved, the project team should progress design in line with the presented strategy. Where it is found the proposed strategy is not suitable for a particular credit area, the BREEAM assessor should be notified immediately.

The project team should provide the BREEAM assessor with evidence submissions once available to ensure any compliance issues are identified in good time for compliance to be achieved.

6. Appendix A – BREEAM Credit Strategy Summary

This credit strategy summary outlines the available, targeted and potential credits within the assessment. The responsible party for compliance is identified and a comment is presented in relation to any available documentation referenced or assumptions taken during formation of the credit strategy. Credits will only be achieved where compliant evidence is provided to the assessor. Full criteria and evidential requirements are found in the [BREEAM New Construction V6.1 manual](#)

MANAGEMENT - 1 credit = 0.61%						
		Available	Targeted	Potential	Responsible Party	Comments
Man 01: Project brief and design	Project delivery planning	1	1		Client	Early stage action required. Meeting of project delivery stakeholders is required prior to completion of concept design to identify/define roles. Show how the project delivery stakeholders contributions and their consultation has influenced: Initial Project Brief, Project Execution Plan, Communication Strategy to be provided if available.
	Stakeholder consultation	1	1		Client	All relevant third-party stakeholders would need to be consulted by the design team, by RIBA Stage 2, and observe the minimum consultation content. Feedback to all parties must be received by RIBA Stage 4. This should be satisfied through the masterplan consultation and amendments of design for the Ph2 application.
	Pre-requisite: Sustainability Targets	-	Yes		Client	Formally agreed strategic performance targets will need to be set early in design process . Employers requirements confirming BREEAM rating.
	BREEAM AP Concept Design	1	1		Client / Sustainability Consultant	Early stage action required: Evidence required confirming a BREEAM Advisory Professional was appointed for RIBA stage 2. Meeting minutes / BREEAM trackers showing BREEAM AP contribution and feedback during Concept Design is anticipated. AES appointment covers this.
	BREEAM AP Developed Design	1	1		Client / Sustainability Consultant	Previous credit must be achieved. Evidence confirming the sustainability champion has been appointed for RIBA Stages 2-4. Meeting minutes / BREEAM trackers showing BREEAM AP contribution and feedback during Developed Design. AES appointment covers this.
Man 02: Life cycle cost and service life planning	Elemental LCC	2	2		Client / Sustainability Consultant	Early stage action required: AES have been appointed. Elemental LCC to be completed.
	Component LCC options	1	1		Client / Sustainability Consultant	The Technical Design life cycle costing is targeted and AES have been appointed.

	Capital cost reporting	1	1		Contractor	The contractor will be required to report the capital cost.
Man 03: Responsible construction practices	Pre-requisite: Legal & sustainable timber	-	Yes		Contractor	The contractor will be required to source legal & sustainable timber for all temporary site timber. Letter/Supplier Certificates confirming all timber will comply with the UK Government Timber Procurement Policy will be required.
	Environmental management	1	0	1	Contractor	Depending on contractor appointed, evidence confirming contractors ISO14001 and compliance with PPG6 guidelines would be required.
	Pre-requisite: Sustainability Targets	-	Yes		Client / Contractor	Client and main contractor to formally agree performance targets - letter or specification required.
	BREEAM AP Construction	1	1		Contractor / AES	BREEAM Advisory Professional is appointed for the construction period. Meeting minutes / BREEAM trackers showing BREEAM AP contribution and feedback during Construction. AES appointment covers this.
	Responsible construction management BREEAM Excellent Rating Minimum Standard (one credit)	2	2		Contractor	2 credits (CCS) = a score of 39 (with a minimum of 13 in each section) plus demonstration of additional item 'g' from table 4.1 in the BREEAM manual. Exemplary credit will be achieved where 'p' and 'q' from the list are also demonstrated, in reference to GN33. Where a CCS score of 39 is not achieved, alternative compliance through the checklist 4.1 is required.
	Monitoring of utility consumption	1	1		Contractor	Contractor required to monitor energy and water use throughout construction.
	Transport of materials and waste	1	1		Contractor	Contractor required to monitor vehicle mileage for delivery of key materials and waste collection.
Man 04: Commissioning and handover	Commissioning schedule and responsibilities BREEAM Excellent Rating Minimum Standard	1	1		M&E	Compliant commissioning schedule responsibility lies with the subcontractor(s).
	Commissioning design and preparation	1	1		M&E	During the design stage, the client or main contractor will appoint a project team member (who is not involved in the general installation works for the building services systems) with responsibility for undertaking design reviews, commissioning management etc.
	Testing and inspecting building fabric	1	0		Contractor	Thermographic survey & air tightness testing would be required Note: any remedial action would also need to be implemented.
	Building user guide and training BREEAM Excellent Rating Minimum Standard (Criterion 11)	1	1		Contractor	2no. building user guides and 2no. training schedules are required for user and building management as well as handover training.

Man 05: Aftercare	Aftercare support	N/A			N/A	N/A due to scope of shell & core.
	Commissioning implementation BREEAM Excellent Rating Minimum Standard	N/A			N/A	
	Post occupancy evaluation	N/A			N/A	
		18	16	1		

HEALTH AND WELLBEING - 1 credit = 0.80%						
		Available	Targeted	Potential	Responsible Party	Comments
Hea 01: Visual comfort	Control of glare from sunlight	N/A			N/A	N/A due to scope of shell & core
	Daylighting	1	0		Sustainability Consultant	Daylighting report would be required to demonstrate 2% daylighting factor achieved in the office space along with uniformity ratio. Calculations could be carried out but with some risk of compliance.
	View out	1	1		Architect	View out calculations to be completed by PRC to determine viability of credit. Based on current floor plans and elevations design appears likely to achieve this credit
	External lighting	1	1		M&E	External lighting only. External lighting needs to be in line with BS 5489-1:2013 and BS EN 12464-2:2014. This has been confirmed in the provided Watkins Payne 'External lighting report'
Hea 02: Indoor air quality	Pre-requisite: IAQ plan	-	No		M&E	Indoor air quality plan would be required as a prerequisite to the ventilation credit. This is not currently instructed.
	Ventilation	1	0		M&E	IAQ plan would be required as above. It would also need to be demonstrated that the building has been designed provide fresh air into the building in line with the requirements for ventilation under BS ISO 17772-1:2017 or, for naturally ventilated buildings, CIBSE AM10.
	Emissions from construction products	N/A			N/A	N/A due to scope of shell & core
	Post-construction indoor air quality measurement	N/A			N/A	N/A due to scope of shell & core
Hea 04: Thermal comfort	Thermal modelling	1	1		M&E	Carry out simulation modelling by end of RIBA Stage 4 providing a full dynamic thermal analysis in accordance with CIBSE AM11. Report the PPD and PMV.
	Design for future thermal comfort	1	1		M&E	Thermal comfort analysis must demonstrate that compliance is met for a projected climate change environment. Report the PPD and PMV.
	Sound insulation	N/A			N/A	N/A due to scope of shell & core

Hea 05: Acoustic performance	Indoor ambient noise level	1	0		Acoustician	Quantifiable assessment would be required to confirm fabric is of a suitable standard for tenant to achieve compliance with Section 7 of BS 8233:2014 upon fit-out. Not currently instructed.
	Room acoustics	N/A			N/A	N/A due to scope of shell & core
Hea 06: Security	Security of site and building	1	1		Client	Early stage action required: A Security Specialist would need to be appointed to conduct a Security Needs Assessment, recommendations will need to be implemented.
Hea 07: Safe & Healthy Surroundings	Safe access	1	0		Architect	Dedicated and safe cycle paths would be required to the cycle storage areas and pedestrian paths would be required linking the site entrance, parking, outdoor space and connecting off site paths. Car parking areas and HGV parking/turning areas would be required to be separated for compliance to be met.
	Outside space	1	1		Landscape Architect	The outside space must: - appropriately sized for the predicted number of building users, - be an outdoor landscaped area; the majority of the space should be open to the sky, - have appropriate seating areas and be non-smoking , - be located to ensure it is accessible to all building users and avoids areas that will have disturbances from sources of noise (e.g. building services, car parks, busy roads, delivery areas etc.). This could either be on the site, or within the masterplan area (see KBCN 1045).
		10	6	0		

ENERGY - 1 credit = 0.67%						
		Available	Targeted	Potential	Responsible Party	Comments
Ene 01: Reduction of energy use and carbon emissions	Reduction of energy use and carbon emissions BREEAM Excellent Rating Minimum Standard (4 credits)	9	4		M&E	Updated BRUKLs & .inp files to be provided by M&E, to confirm the number of credits achieved. Design / systems used to be improved where possible to increase scoring under the Ene 01 section.
	Operational	4	0		N/A	Design workshop would be required to determine predicted operational energy consumption. Modelling used to determine and set targets, and report to be issued summarising findings.
Ene 02: Energy monitoring	Sub-metering of end use categories BREEAM Excellent Rating Minimum Standard	1	1		M&E	Metering such that 90% of the estimated annual energy consumption of each fuel is assigned to end-use categories. Separate accessible sub-meters (pulsed or other open protocol) are to be installed. BMS not anticipated.
	Sub-metering of high energy load and tenancy areas	1	1		M&E	Separate sub-metering of tenanted areas or relevant function areas. Any high energy loads (if present) to be sub metered. BMS not anticipated.
Ene 03: External lighting	External lighting	1	1		M&E	External lighting to achieve a minimum average of 70 ll/cw, automatic controls and presence detection in intermittent areas.
Ene 04: Low carbon design	Passive design analysis	1	1		M&E	Passive design analysis to be completed by RIBA Stage 2. This could be included within the Energy Strategy. Measures/recommendations must be implemented.
	Free cooling	1	0		M&E	Not targeted due to nature of the build.
	Low and zero carbon technologies	1	1		M&E	LZC study to be produced. Recommendations to be implemented.
Ene 06: Energy efficient equipment	Energy consumption	1	1		Lift Consultant	Lift transport analysis to be completed, with the most energy efficient lift selected.
	Energy efficient features - lifts	1	1		Lift Consultant	Specification of energy saving features.
	Energy efficient features - escalators or moving walks	N/A			N/A	N/A due to the absence of escalators or moving walkways
Ene 07: Energy efficient laboratory systems		N/A			M&E	N/A due to scope of shell & core
Ene 08: Energy efficient equipment		N/A			M&E	N/A due to scope of shell & core
		21	11	0		

TRANSPORT - 1 credit = 0.96%						
		Available	Targeted	Potential	Responsible Party	Comments
Tra 01: Transport assessment & travel plan	Travel plan	2	2		Transport Consultant	The project transport assessment and travel plan production by Motion has been provided, the travel assessment is BREEAM compliant with some amendment or additional supporting information required for the travel plan
Tra 02: Sustainable transport measures	Pre-requisite: Tra 01 criterion 3-5	-	Yes		Client/ Architect	Travel Plan measures to be implemented where part of the scope of works, and TP handed over to building occupants.
	10 credits - Transport options implementation	10	7	2	Transport Consultant / Architect	AI = 2.08 <u>Targeted</u> - EV charging (1 point) - 10% of spaces, active or passive mix proposed. - Cycle storage (1 point) - Car sharing spaces (1 point) - 5% of spaces. - Enhanced amenities (2 points) - Outside space linked to Hea 07.2. - Existing amenities (1 point) - Cyclist facilities (1 point) <u>Potential</u> - Liaise with local authority on state of current cycle/pedestrian infrastructure and agree on an improvement (2 points). Discussions ongoing regarding foot/cycle path upgrades. <u>Not Targeted:</u> - Public transport information system (1 point) - Demonstrate an increase over the existing AI through negotiation with local transport providers (2-3 points) - Implement 1 site specific improvement measure recommended in the travel plan (1-3 points)
		12	9	2		

WATER - 1 credit = 0.78%						
		Available	Targeted	Potential	Responsible Party	Comments
Wat 01: Water consumption	Water consumption BREEAM Excellent Rating Minimum Standard	5	2	1	M&E	Efficient sanitaryware to be installed. Specification to be provided.
Wat 02: Water monitoring	Pulsed water meter and submeters BREEAM Excellent Rating Minimum Standard (Criterion 1)	1	1		M&E	Installation of pulsed water meter to each unit, plus sub-meters for any high water load uses.
Wat 03: Water leak detection and prevention	Leak detection system	1	1		M&E	Installation of a leak detection system.
	Flow control devices	1	1		M&E	Installation of flow control devices in each sanitaryware area. PIR or timer control required.
Wat 04: Water efficient equipment	Water efficient consumption	1	1		Landscape Architect	No mains-fed irrigation or vehicle wash systems to be installed.
		9	6	1		

MATERIALS - 1 credit = 1.25%						
		Available	Targeted	Potential	Responsible Party	Comments
Mat 01: Environmental impacts from construction products	Building LCA - Concept Design - Superstructure	6	4		Client / Architect	Early stage action required: AES appointed for Concept Design LCA exercise, to be completed prior to the submission to planning. Further credits will be secured if the LCA for the technical design stage is completed, and submitted to the BRE prior to the end of RIBA Stage 4.
	Building LCA - Technical Design - Superstructure					
	LCA Options - Concept Design - Superstructure					
	LCA Options - Technical Design - Superstructure					
	LCA Options - Concept Design - Substructure/hard landscaping	1	1		Client / Architect	
Mat 02: Environmental impacts from construction products	Environmental Product Declarations	1	0	1	Contractor	Construction products with EPDs that achieve a total EPD points score of at least 20 in the Mat 01 02 Results Submission Tool will need to be specified. Compliance to be reviewed throughout construction.
Mat 03: Responsible sourcing of construction products	Pre-requisite: Legal & sustainable timber BREEAM Excellent Rating Minimum Standard (Criterion 1)	-	Yes		Contractor	The contractor must prove the use of only legal and sustainable timber. Ideally FSC/PEFC certified.
	Sustainable procurement	1	1		Client	Compliant Sustainable Procurement Plan must be provided by RIBA Stage 2. Contractor is required to implement.
	Responsible sourcing	3	2	1	Contractor	Building products to be procured with responsible sourcing certification, i.e., BES 6001, FSC/PEFC, ISO 14001.
Mat 05: Designing for durability and resilience	Protecting the building from damage and degradation	1	1		Architect	Compliant durability and resilience report required, no issues with compliance anticipated.
Mat 06: Material efficiency	Optimisation measures investigated and implemented	1	0	1	Collaboration	Compliant materials efficiency report would need to be completed prior to the completion of RIBA stage 2.
		14	9	3		

WASTE - 1 credit = 0.70%						
		Available	Targeted	Potential	Responsible Party	Comments
Wst 01: Construction waste management	Pre-demolition audit	1	1		Client	A pre-demolition audit has been issued to the BREEAM assessor and reviewed
	Resource efficiency	3	3		Contractor	Provision of site waste management plan and achievement of waste benchmark targets (waste generated per 100m ² GIFA must not exceed 3.2 tonnes or 3.4m ³).
	Diversion from landfill	1	1		Contractor	Achievement of waste diverted from landfill targets. Construction waste diverted from landfill should exceed 80%, and 90% for demolition waste.
Wst 02: Sustainable aggregates	Sustainable aggregate points	1	1		Contractor	Compliance can be reviewed once contractor has identified all viable aggregate sources.
Wst 03: Operational waste	Recycling and non recyclable waste storage BREEAM Excellent Rating Minimum Standard	1	1		Architect	Indicative space to be marked up for recycling waste storage and a compactor/baler (if required). 2m ² required per 1000m ² floor area for recycling, and sufficient extra space for refuse.
Wst 04: Speculative finishes		N/A			N/A	N/A due to scope of shell & core
Wst 05: Adaptation to climate change	Resilience of building	1	1		Collaboration	Adaptation to climate change Risk Matrix to be undertaken during RIBA Stage 2 . Recommendations/solutions to be demonstrated in design by end of RIBA Stage 4 .
Wst 06: Design for disassembly and adaptability	Recommendations	1	1		Collaboration	Disassembly and the functional adaptation study to be undertaken during RIBA Stage 2 .
	Implementation	1	1		Collaboration	Recommendations/solutions to be demonstrated in design by end of RIBA Stage 4 .
		10	10	0		

LANDUSE & ECOLOGY - 1 credit = 1.15%						
		Available	Targeted	Potential	Responsible Party	Comments
LE01: Site selection	Previously occupied land	1	1		Architect	At least 75% of the proposed development is on previously occupied land.
	Contaminated land	1	0		Environmental Consultant	A copy of remediation strategy and implementation plan would be required. High levels of contamination not likely.
LE02: Ecological risks and opportunities - comprehensive route	Pre-requisite: statutory obligations	-	Yes		Ecologist	Early stage action required. Survey and evaluation required early The Preliminary ecology report and biodiversity net gain assessment (Phlorum), shows that early survey and evaluation has taken place. It is recommended that a BREEAM GN40 report should be completed by the Suitably Qualified Ecologist in reference to KBCN1194 - site wide ecological enhancements.
	Survey and evaluation	1	1		Ecologist	
	Determining ecological outcomes	1	1		Ecologist	
LE03: Managing impacts on ecology - comprehensive route	Pre-requisite: ecological risks and opportunities	-	Yes		Ecologist	
	Planning and measures on site	1	1		Ecologist	
	Managing negative impacts	2	2		Ecologist	
LE04: Ecological change and enhancement - comprehensive route	Pre-requisite: managing negative impacts on ecology	-	Yes		Ecologist	
	Ecological enhancement	1	1		Ecologist	
	Change and enhancement of ecology	3	0		Ecologist	
LE05: Long term ecology management and maintenance	Pre-requisite: statutory obligations	-	Yes		Ecologist	
	Management and maintenance throughout the project	1	1		Contractor	
	Landscape and ecology management plan	1	1		Ecologist	
		13	9	0		

POLLUTION - 1 credit = 0.75%						
		Available	Targeted	Potential	Responsible Party	Comments
Pol 01: Impact of refrigerants	Absence of refrigerant containing systems	N/A			N/A	N/A due to refrigerant containing systems being installed.
	Refrigerant containing systems DELCO2/GWP	2	1	1	M&E	Achievement of a DELCO2 calculation of 1000 or less (typically achieved with VRF).
	Hermetically sealed systems or leak detection	1	1		M&E	This viable with a VRF systems are specified. Subcontractor to provide calculation.
Pol 02: Local air quality	Non combustion systems or low NOx	2	2		M&E	Will be achieved if all heating and hot water will be supplied by non-combustion systems (i.e. all electric)
Pol 03: Flood and surface water management	Flood risk zone	2	0	1	Drainage Engineer	The provided Flood risk assessment (Baynham Meikle) shows localised areas of the development that have medium flood risk for surface water flooding, however, a potential credit is available where the ground level of the building and access to the building and the site, are designed so they are at least 600 mm above the design flood level.
	Surface water runoff (rate)	1	1		Drainage Engineer	Drainage Engineer to provide calculations and advise. Post-development run-off rate and volume must not exceed the pre-development scenario, including the climate change event. GN38 to be completed.
	Surface water runoff (volume)	1	1		Drainage Engineer	
	Minimising watercourse pollution	1	0	1	Drainage Engineer	Infiltration on site - 5mm rule to be met, but will need to be confirmed by calculation. GN38 to be completed. Reference to KBCN1059 if required.
Pol 04: Reduction of night time light pollution	External lighting	1	1		Electrical Engineer	The external lighting report received confirms the site will be compliant with Table 2 of the ILP guidance, can be automatically switched off between 23:00-07:00, and any illuminated signs to comply with ILP PLG05.
Pol 05: Reduction of noise pollution	Noise impact assessment	1	0	1	Acoustician	Noise levels from the proposed buildings would need to be 5dB lower than background noise at the most exposed noise sensitive development. A BS4142 compliant noise assessment has been provided to establish the existing noise levels which forms the early action of this particular credit
		12	7	4		

EXEMPLARY - 1 credit = 1.00%						
		Available	Targeted	Potential	Responsible Party	Comments
Man 03: Responsible construction practices	Responsible construction management	1	0		Contractor	CCS score of over 39 (min 13 in each area) to achieve compliance.
Hea 01: Visual comfort	Daylighting	1	0		Sustainability Consultant	Exemplary performance unlikely but will be confirmed in the daylighting report if completed.
	Internal and external lighting levels, zoning and control	N/A			N/A	N/A due to scope of shell & core.
Hea 06: Security	Security of site and building	1	0		As above	SABRE assessment cost prohibitive.
Ene 01: Reduction of energy use and carbon emissions	Reduction of energy use and carbon emissions	5	0		As above	BRUKL output not anticipated to confirm exemplary performance.
Wat 01: Water consumption	Water consumption	1	0		As above	Sanitaryware schedule not anticipated to confirm exemplary performance.
Mat 01: Building LCA	LCA Options - Concept Design - Core building services	1	1		As above	LCA exercise is due to be completed by AES.
	LCA and LCC alignment	1	1		As above	LCA / LCC exercise is due to be completed by AES.
	Third Party verification	1	1		As above	LCA exercise is due to be completed by AES.
Mat 03: Responsible sourcing of construction products	Responsible sourcing	1	0		As above	To be reviewed through procurement of materials.
Wst 01: Construction waste management	Resource efficiency	1	0		As above	Relies on actual waste quantities produced and will therefore be reviewed during construction.
Wst 02: Sustainable aggregates	Sustainable aggregate points	1	1		As above	The pre-demolition audit indicates the use of on-site recycled aggregate will allow for this credit to be achieved
Wst 05: Adaptation to climate change	Responding to climate change	1	0		As above	This would only be achieved with the award of several credit areas that are not yet secured.
LE02: Ecological risks and opportunities	Wider site sustainability	1	0		As above	Would require both Hea 07 credits & Pol 03 minimising watercourse pollution credits, to be achieved and therefore compliance will not be met.
LE04: Ecological change and enhancement - comprehensive route	Ecological enhancement	1	0		As above	The net-gain calculation indicates this will not be achieved
		10	4	0		